# P.I.T.


www.pittools.com

PIT Global

Hangzhou Gongxuan Hardware Tools Co., Ltd.
Address: 1 Room 1-2201, Building 1, Keji Yuan Road 1,Baiyang street,Qiantang District,
Hangzhou City, Zhejiang Province,China
Email: info@pit-tools.com
Tel: +86-15057938923 +86-15024594433 +0571-88399225

Specification for referenceonly.subject to product appearance,design and techanical modifications without prior notice. 2026V1.0

# P.I.T.

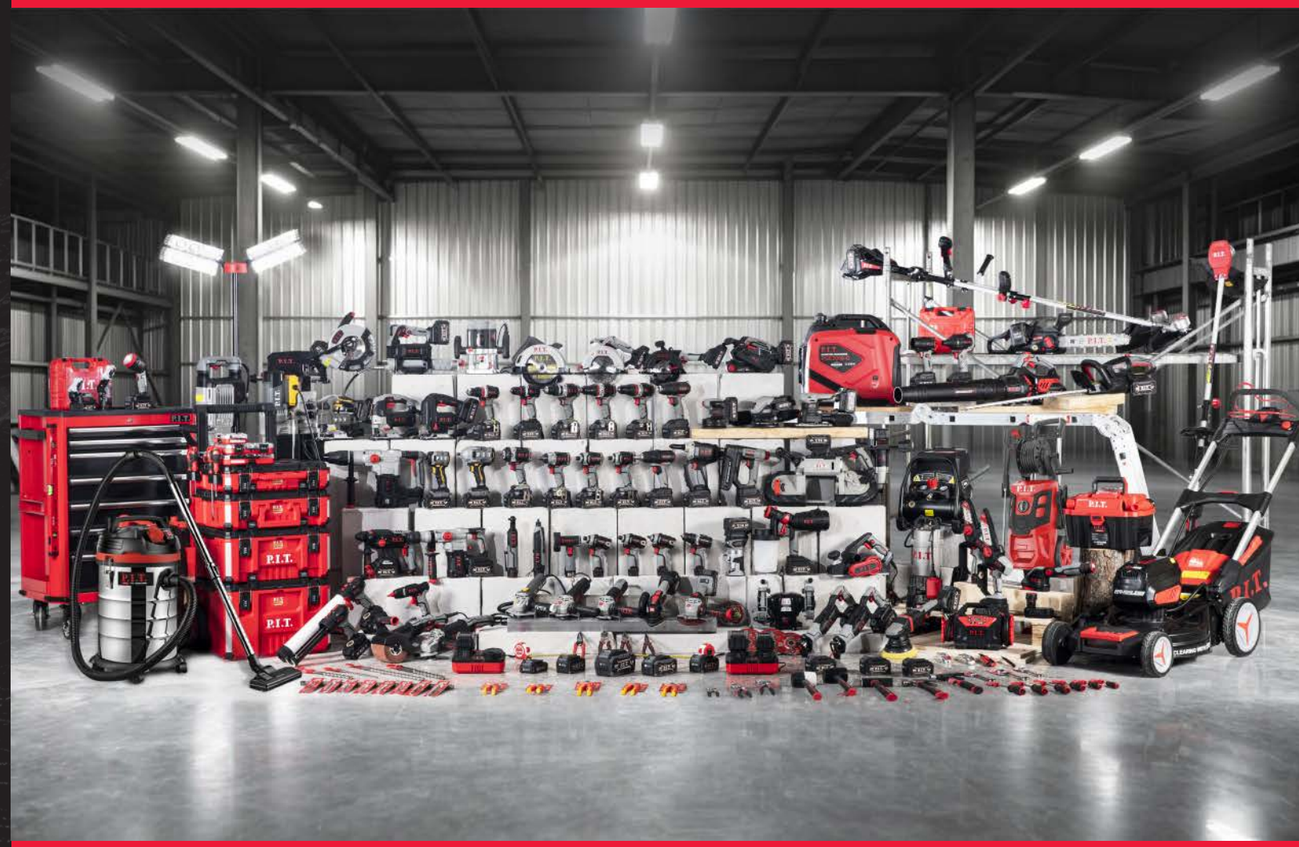

# PRODUCT CATALOGUE

## 2026-2027

# ABOUT P.I.T.

P.I.T. is a global professional tool brand established in 2001, dedicated to providing reliable and durable tools for professionals worldwide.

With 3,000+ SKUs covering power tools, hand tools, storage systems, and outdoor equipment, P.I.T. serves key industrial markets across Asia, Central Asia, Eastern Europe, and emerging regions.

P.I.T. is committed to delivering consistent quality and reliable performance for professionals worldwide.




PROVIDING
**TRUSTED**
AND
**RELIABLE**
**TOOLS**
FOR
GLOBAL CUSTOMERS

OUR
**CORE** CONFIDENCE

**FULL PRODUCT CATEGORIES**

**ALL APPLICATION SCENARIOS**

**COMPREHENSIVE SUPPORTING SERVICES**

P.I.T.

# TABLE OF CONTENTS

## POWER TOOLS


7-10 **STACKIN™**

11-16 **BATTERY & CHARGER**

17-20 **ULTRA**
Impact Drilling | Impact Wrench | Impact Driver | Cutting | Rotary Hammer | Cleaner | Diamond Core Drill

21-22 **40V ONEPOWER**
OPE

23-42 **20V ONEPOWER**
Drilling | Impact Driver | Wrench | Polishing & Cutting|Rotary Hammer | Fastening
Air Compressor | Lifestyle | Garden | Combo Kit

43-46 **12V ONEPOWER**
Drilling | Impact Driver | Wrench | Garden | Polishing | Lifestyle

47-88 **CORDED TOOLS&OTHERS**
Drilling | Impact Driver | Wrench | Polishing | Angle Grinder |Rotary Hammer | Cutting | Fastening | Welder
Electronics |Gasoline Generator | Air Compressor | Pump | Cleaner | Garden | Automobile Repair


## ACCESSORIES


91-118 **DRILLING**
Metal | Wood | Masonry

119-122 **CONSTRUCTION & DEMOLITION**
Chisel | Pickaxe

123-142 **FASTENING**
Screwdriver Bit | Bit Set | Bit Holder | Nut Driver | Drill&Screw Auxiliary | Staples | Mixes Rod | Glue Stick

143-162 **CUTTING**
Metal | Wood | Masonry | Multifunctional | Jigsaw | Reciprocating Saw | Multi Saw Blade

163-176 **BRUSHING AND ABRASIVES**
Coated Abrasive | Bonded Abrasive | Compounding & Wool | Pads Router Bit Set

177-182 **GARDEN TOOL ACCESSORIES**
Chain Saw Accessories | Garden Tool Accessories


## HAND TOOLS


183-192 **PLIERS**
Wire Cutters | Diagonal Cutting Pliers | Needle Nose Pliers | Circlip Pliers | Mini Pliers | Water Pump Pliers
Tin Snips | Aviation Shears

193-196 **ELECTRONICS AND ELECTRICAL ENGINEERING**
Insulation tape | test pencil | multimeter | Wire strippers | Electric soldering iron

197-210 **FASTENING**
Screwdriver | Hexagon Socket | Ratcheting Screwdriver Set

211-214 **CLAMPING**
G Clip | F Clamp | Spring Clip | Quick Clamp | Pipe Clamp | Nail Gun | Nut Gun | Rivet Gun | Rivet

215-218 **PERCUSSION**
Claw Hammer | Machinist Hammer | Rubber Hammer | Masonry Hammer | Axe | Chisel | Crowbar

219-224 **MEASUREMENT**
Tape Measure | Level | Fiberglass Ruler | Square | Vernier Caliper Measuring Wheel | Laser Level | Rangefinder

225-232 **CUTTING**
Utility Knife | Wall Panel Saw | Hacksaw Frame | Bolt Cutters| Manual Tile Cutter
Kitchen Shears | Steel File | Wood Rasps | Assorted Files

233-240 **MACHINIST**
Box Wrench | Double Wrench | Combination Wrench | Ratchet Wrench | Adjustable Wrench | Torque Wrench | Sleeve

241-242 **STORAGE AND HANDLING**
Plastic Tool Box | Tool Cart | Tool Cabinet

243-244 **PPE**
Work gloves | Helmet | Mask |Goggles

245-250 **ARCHITECTURE**
Foam Gun | Caulking Gun | Brush | Chain Block | Glass Sucker | Mover

# IMPORTANT NOTICE

When using power tools, please adhere to safety guidelines to minimize the risk of fire, electric shock, injury, or other accidents.

### Keep the Workplace Tidy
A cluttered workspace and workbench can easily lead to injuries.

### Proper Handling of Auxiliary Accessories
When not using tools or performing maintenance, first remove accessories such as blades, drill bits, saw blades, etc.

### Be Mindful of the Work Environment
Do not use power tools in damp areas. Keep the workspace well-lit, and avoid placing tools in locations exposed to rain or near flammable gases or liquids.

### Precautions Before Operation
Before starting a tool, remove any auxiliary accessories like adjustment keys, wrenches, etc., to ensure safety.

### Keep Children and Others Away from the Work Area
Children or other non-staff members should not enter the work area or touch tools and wires.

### Prevent Unintentional Activation
Before using the tool, ensure that the switch is in the "off" position before connecting the power source to avoid accidents.

### Store Tools Properly
When not in use, tools should be stored in a dry and secure location, out of the reach of children.

### Use Proper Outdoor Extension Cords
When operating tools outdoors, use extension cords suitable for outdoor use.

### Never Apply Excessive Force to Tools
Different tools have varying power levels. For better performance and safety, never force a tool beyond its capacity.

### Stay Alert
Remain focused and attentive. Do not operate machinery if you are feeling fatigued.

### Use the Right Tool for the Job
Different tasks require different tools. Do not use small tools for large projects or inappropriate tools for unintended purposes.

### Check for Worn Parts
During operation, before restarting the tool, inspect protective equipment and other parts to ensure they are in proper condition. If any damage or displacement is detected, stop immediately and reinstall the parts according to the manual. For repairs or replacement, contact an authorized service center.

### Wear Appropriate Work Clothes
Avoid loose clothing and jewelry. When working outdoors, it is recommended to wear rubber gloves and non-slip shoes. If you have long hair, wear protective headgear.

### Wear Protective Gear
Use protective gear to avoid contact with grounded electrical equipment such as pipes, radiators, radios, or refrigerators.

### Use a Safety Mask
Wear a dust mask when performing cutting operations.

### Regularly Replace Worn Parts
Frequently inspect and regularly replace worn parts.

### Protect the Power Cord
Do not carry tools by the power cord. When placing tools, keep the power cord away from heat, oil, or sharp objects.

### Check Voltage
Before use, ensure that the power supply voltage matches the voltage indicated on the tool's nameplate. Using a power supply with a higher voltage may cause safety hazards or damage the tool, while a lower voltage may harm the motor.

### Ensure Safe Operation
Secure the workpiece with a clamp or vise to allow safe handling of the tool with both hands.

### Avoid Overreaching
Maintain stable footing and proper body balance while operating tools.

### Maintain Your Tools
Keep cutting tools clean and sharp for optimal performance and safety. Follow safety guidelines to lubricate tools and replace worn parts. Regularly check the power cord for damage and, if necessary, visit an authorized service center for repairs. Keep tool handles dry, clean, and free from oil or grease.

## ANNOTATION

All products are subject to the physical items. reserves the right to modify product appearance designs and, without prior notice, adjust quantities of accessories, specifications, and standard attachments. The company assumes no liability for printing errors. Unauthorized use of images and related data from this product catalog is strictly prohibited, and the company assumes no responsibility for such misuse. The company shall not be held liable for any losses incurred by users due to improper use of the products.




Double Insulation



voltage frequency



Power (electricity)



Battery capacity



Engine displacement



BL-motor



Anti-vibration



Electronic Start


Torque Limiter



Automatic lubrication


Dust Collection



Brake


Variable Speed



Soft Start


Pull-up starter


Reversing



Torque adjustment



Torque



Bevel Angle



Start oil pump



Mechanical Speed



Easy Start



Waterproof


Job Light


Drill chuck


Hammer


Drilling


Hammer&Drilling



Speed



Drill chuck specifications



Frequency



Drill chuckspecifications



Striking Energy



SDS-PLUS Shank



SDS-MAX Shank



mold specifications



Spindle thread



Grooving depth



Slot width



Diameter



specifications


Orbital pendulum action



Laser guide



Maximum diameter



Maximum diameter




Temperature range



Air volume range



Spraying speed

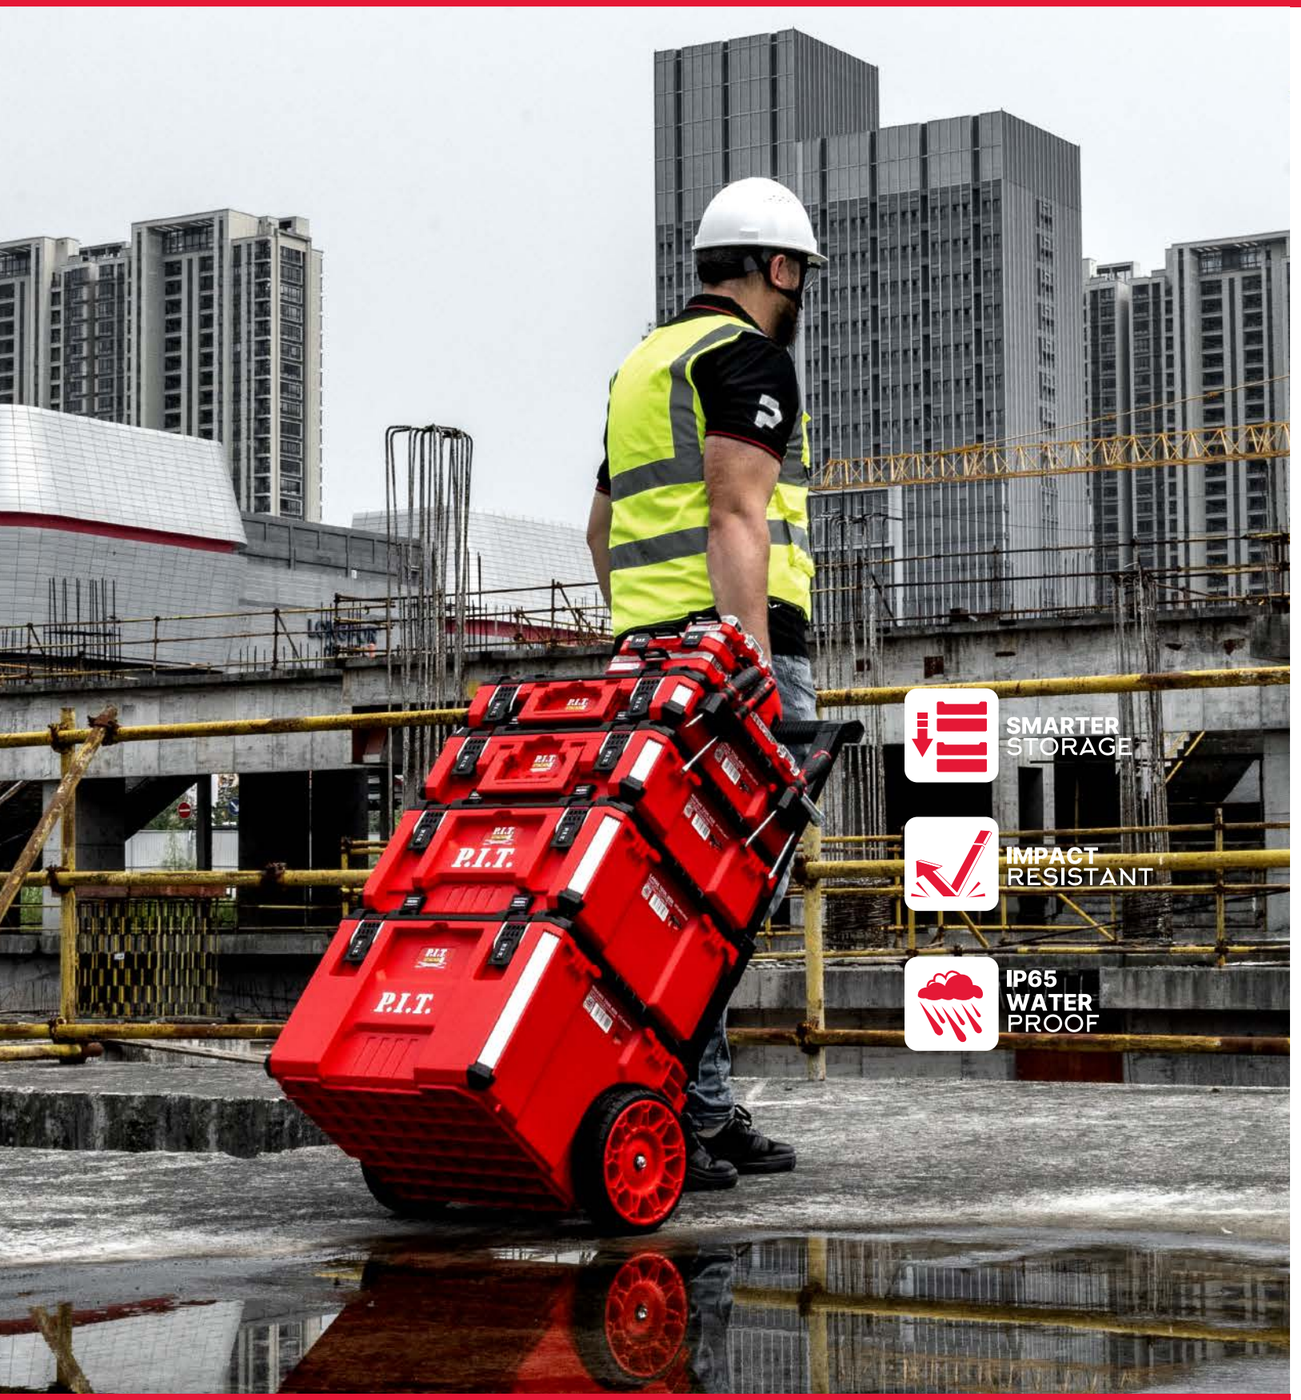


STACKIN UNRIVALED ORGANIZATION. SMARTER STORAGE.

## STACKIN™ ROLLING TOOL BOX

DRUAPOWER · IMPACT RESISTANT · LOCKING ANTI-THEFT · IP65 WATER PROOF






9" All-Terrain Wheels

| Model | Description | Size (cm) | Qty | N.W / G.W |
|---|---|---|---|---|
| HTLB02-4933 | STACKIN™ Rolling Tool Box | 58x49x41cm | 1pc/CTN | 7.8 /9.4Kg |

## STACKIN™ LARGE TOOL BOX

DRUAPOWER · IMPACT RESISTANT · LOCKING ANTI-THEFT · IP65 WATER PROOF






Interior Organizer Trays

| Model | Description | Size (cm) | Qty | N.W / G.W |
|---|---|---|---|---|
| HTLB02-4924 | STACKIN™ Large Tool Box | 51x25.5x42.2cm | 1pc/CTN | 3.4/4.25Kg |

## STACKIN™ MEDIUM TOOL BOX

DRUAPOWER · IMPACT RESISTANT · LOCKING ANTI-THEFT · IP65 WATER PROOF






Convenient handle

| Model | Description | Size (cm) | Qty | N.W / G.W |
|---|---|---|---|---|
| HTLB02-4917 | STACKIN™ Medium Tool Box | 51x38x42.2cm | 2pc/CTN | 6.2/7.2Kg |

## STACKIN™ SMALL TOOL BOX

DRUAPOWER · IMPACT RESISTANT · LOCKING ANTI-THEFT · IP65 WATER PROOF







Customizable Foam Insert

| Model | Description | Size (cm) | Qty | N.W / G.W |
|---|---|---|---|---|
| HTLB02-4912 | STACKIN™ Small Tool Box | 51x38x42.2cm | 3pc/CTN | 8.6 /9.6Kg |

## STACKIN™ LARGE PARTS BOX

DRUAPOWER · IP65 WATER PROOF

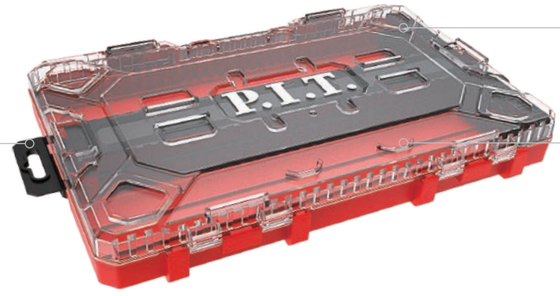





Customizable filament base

| Model | Description | Size (cm) | Qty | N.W / G.W |
|---|---|---|---|---|
| HTLB02-3505 | STACKIN™ Large Parts Box | 47.5x36.5x49cm | 20pc/CTN | 15.1 /16.5Kg |

## STACKIN™ MEDIUM PARTS BOX

DRUAPOWER · IP65 WATER PROOF

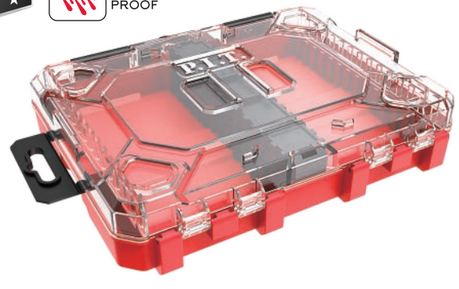

| Model | Description | Size (cm) | Qty | N.W / G.W |
|---|---|---|---|---|
| HTLB02-2205 | STACKIN™ Medium Parts Box | 45.5x36x39cm | 32pc/CTN | 12.4 /13.6Kg |

## STACKIN™ SMALL PARTS BOX

DRUAPOWER · IP65 WATER PROOF



| Model | Description | Size (cm) | Qty | N.W / G.W |
|---|---|---|---|---|
| HTLB02-1505 | STACKIN™ Small Parts Box | 32x22x41cm | 36pc/CTN | 5.58 /6.25Kg |

## STACKIN™ TOOL BOX SET

DRUAPOWER · IMPACT RESISTANT · LOCKING ANTI-THEFT · IP65 WATER PROOF



| Model | Description | Size (cm) | Qty | N.W / G.W |
|---|---|---|---|---|
| HSET07-0004 | STACKIN™ TOOL BOX SET | 54x51x87cm | 32pc/CTN | 17.1/19.65kg |

## STACKIN™ TOOL BOX SET

DRUAPOWER · IMPACT RESISTANT · LOCKING ANTI-THEFT · IP65 WATER PROOF



| Model | Description | Size (cm) | Qty | N.W / G.W |
|---|---|---|---|---|
| HSET08-0007 | STACKIN™TOOL BOX SET | 54x51x87cm | 36pc/CTN | 18.4/20.95kg |

## STACKIN™ PARTS BOX SET

DRUAPOWER · IP65 WATER PROOF



| Model | Description |
|---|---|
| HSET08-0004 | HTLB02-3505 : 1PC HTLB02-2205 : 1PC HTLB02-1505 : 2PCS |

## STACKIN™ PARTS BOX SET

DRUAPOWER · IP65 WATER PROOF



| Model | Description |
|---|---|
| HSET08-0003 | HTLB02-3505 : 1PC HTLB02-2205 : 2PCS |

## STACKIN™ PARTS BOX SET

DRUAPOWER · IP65 WATER PROOF



| Model | Description |
|---|---|
| HSET08-1003 | HTLB02-2205 : 1PC HTLB02-1505 : 2PCS |

## STACKIN™ PARTS BOX SET

DRUAPOWER · IP65 WATER PROOF



| Model | Description |
|---|---|
| HSET08-0002 | HTLB02-2205 : 2PCS |

## 20V ONE POWER

| | | PH20-2.4A | PH20-4.0A | PC20403 | PC20401 | PC20402 | PC20801 | PC20802 |
|---|---|---|---|---|---|---|---|---|
| 2.0Ah | PH20201 | 55 MINUTES | 60 MINUTES | 60 MINUTES | 55 MINUTES | 55 MINUTES | 55 MINUTES | 55 MINUTES |
| 4.0Ah | PH20401 | 105 MINUTES | 65 MINUTES | 120 MINUTES | 75 MINUTES | 75 MINUTES | 70 MINUTES | 70 MINUTES |
| 5.0Ah | PH20501 | 125 MINUTES | 80 MINUTES | 150 MINUTES | 95 MINUTES | 95 MINUTES | 85 MINUTES | 85 MINUTES |
| 6.0Ah | PH20601 | 155 MINUTES | 95 MINUTES | 180 MINUTES | 110 MINUTES | 110 MINUTES | 45 MINUTES | 45 MINUTES |
| 8.0Ah | PH20801 | 205 MINUTES | 120 MINUTES | 240 MINUTES | 120 MINUTES | 120 MINUTES | 60 MINUTES | 60 MINUTES |

## 40V ONE POWER

| | | PC20401 | PC20402 | PC20801 | PC20802 |
|---|---|---|---|---|---|
| 4.0Ah | PH40401 | 100 MINUTES | 100 MINUTES | 55 MINUTES | 55 MINUTES |
| 6.0Ah | PH40601 | 155 MINUTES | 155 MINUTES | 95 MINUTES | 95 MINUTES |
| 8.0Ah | PH40801 | 195 MINUTES | 195 MINUTES | 115 MINUTES | 115 MINUTES |

## 12V ONE POWER

| | | | |
|---|---|---|---|
| 1.5Ah | PK12-1.5 | 70 MINUTES | 30 MINUTES |
| 2.0Ah | PK12-2.0 | 90 MINUTES | 40 MINUTES |
| 2.5Ah | PH12301 | 110 MINUTES | 50 MINUTES |

## FASTER CHARGING
TO GET WORK DONE FASTER

## NEW DESIGN – EVEN BETTER


UP TO 25% MORE POWER

UP TO 35% COOLER OPERATION




## CHOOSE THE MOST SUITABLE 20V BATTERY FOR YOUR TOOL.

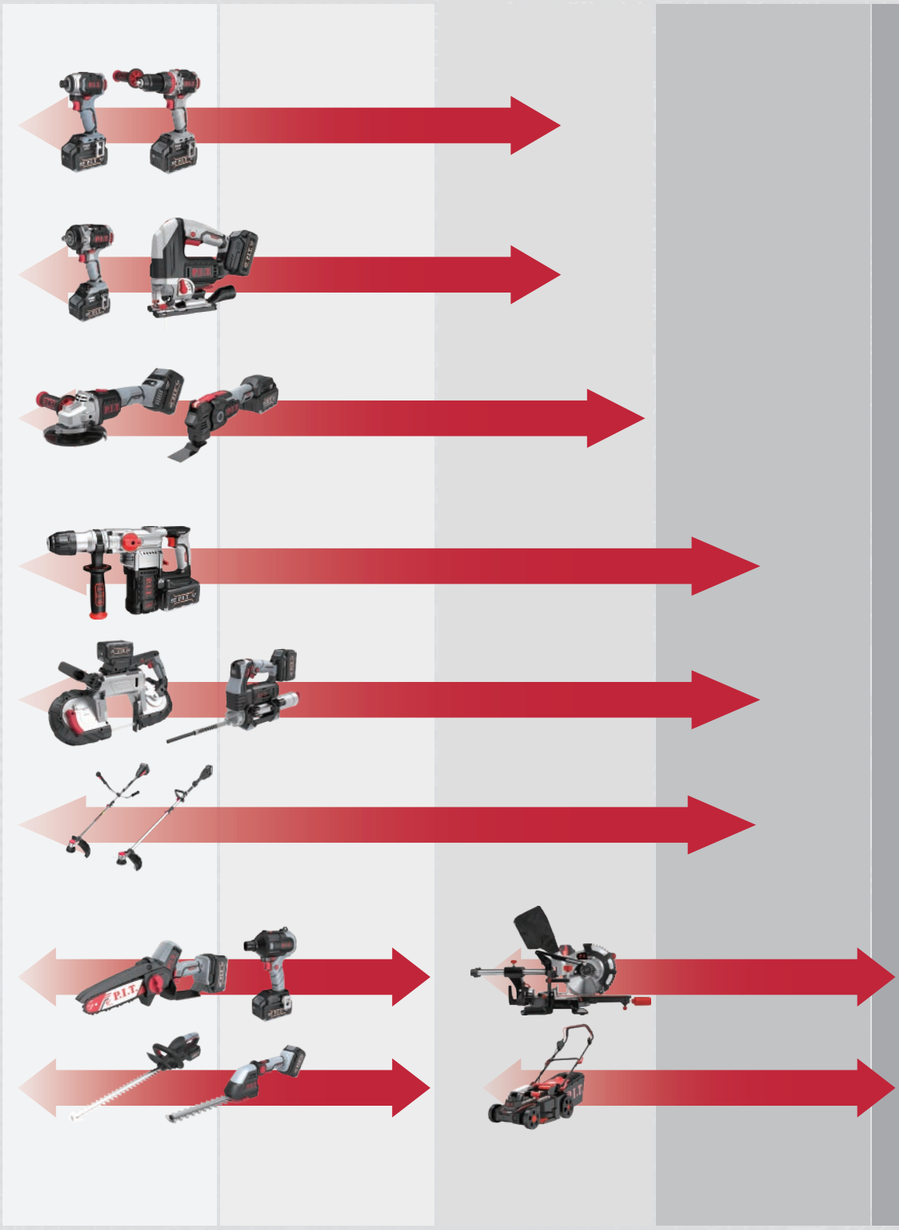

# STRUCTURE EFFICIENTLY POWERED FOR PEAK PERFORMANCE

**BATTERY COMMUNICATION TECHNOLOGY**
- Special communication port design
- Report to host discharge status
- Match smart charger to define charging current

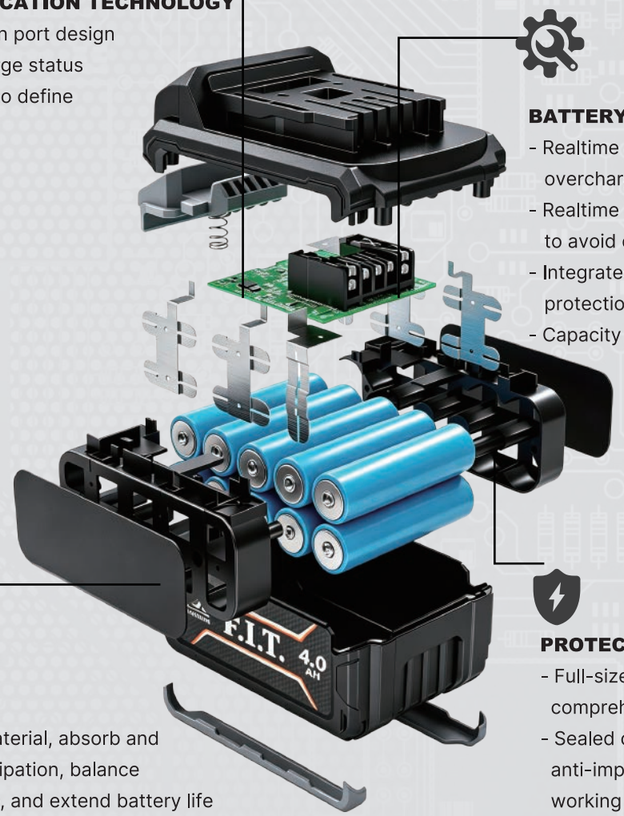


**BATTERY MANAGEMENT TECHNOLOGY**
- Realtime monitor cell voltage to avoid overcharge and over discharge
- Realtime monitor cell temperature to avoid overheated
- Integrated with short-circuit protection device
- Capacity LED indicator

**TEMP CONTROL**
- TES energy storage material, absorb and store battery heat dissipation, balance discharge temperature, and extend battery life
- Fast cooling prevents overheat damage better discharge, longer battery life

**PROTECTION STRUCTURE**
- Full-size shell protection structure, comprehensive protection for battery cells
- Sealed circuit board, anti-leakage, anti-impact, and calmly deal with severe working conditions





## PH40401 — LITHIUM ION BATTERIES




| | |
|---|---|
| Voltage: | 40V |
| capacity: | 4000mAh |
| Watt-hour: | 144Wh |

40V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105101002010 | 37.5x20x32cm | 16/CTN | 16/19.2 |

## PH40601 — LITHIUM ION BATTERY




| | |
|---|---|
| Voltage: | 40V |
| capacity: | 6000mAh |
| Watt-hour: | 222Wh |

40V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105101102010 | 30.5x19.5x24.5cm | 6/CTN | 12/13.2 |

## PH40801 — LITHIUM ION BATTERY




| | |
|---|---|
| Voltage: | 40V |
| capacity: | 8000mAh |
| Watt-hour: | 288Wh |

40V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105101202010 | 30.5x19.5x24.5cm | 6/CTN | 12/13.2 |

## PH20201 — LITHIUM ION BATTERY




| | |
|---|---|
| Voltage: | 20V |
| capacity: | 2000mAh |
| Watt-hour: | 37Wh |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105102001010 | 33x26x27.5cm | 30/CTN | 12/14 |

## PH20401 — LITHIUM ION BATTERY




| | |
|---|---|
| Voltage: | 20V |
| capacity: | 4000mAh |
| Watt-hour: | 74Wh |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105102101010 | 44.5x27x18.5cm | 6/CTN | 12/13.2 |

## PH20501 — LITHIUM ION BATTERY




| | |
|---|---|
| Voltage: | 20V |
| capacity: | 5000mAh |
| Watt-hour: | 92.5Wh |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105102201010 | 44.5x27x18.5cm | 6/CTN | 12/13.2 |

## PH20601 — LITHIUM ION BATTERY




| | |
|---|---|
| Voltage: | 20V |
| capacity: | 6000mAh |
| Watt-hour: | 92.5Wh |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105102301010 | 30.5x19.5x24.5cm | 6/CTN | 12/13.2 |

## PH20801 — LITHIUM ION BATTERY




| | |
|---|---|
| Voltage: | 20V |
| capacity: | 8000mAh |
| Watt-hour: | 92.5Wh |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105102401010 | 30.5x19.5x24.5cm | 6/CTN | 12/13.2 |

## PK12-2.0 — LITHIUM-ION BATTERY




| | |
|---|---|
| Voltage: | 12V |
| Capacity: | 2000mAh |

12V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105100302010 | 38x22.8x17.6cm | 48pcs/CTN | 9.5/10.5kg |

## PH12202 — LITHIUM-ION BATTERY




| | |
|---|---|
| Voltage: | 12V |
| Capacity: | 2000mAh |

TYPE-C CHARGE

12V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105101501010 | 38x22.8x17.6cm | 48pcs/CTN | 9.5/10.5kg |

## PH20-2.4A — CHARGER



| | |
|---|---|
| Input Voltage: | 220-240V~50/60Hz |
| Output Voltage: | 20V |
| Output Current: | 2.4A |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105200603010 | 42x31.5x32.5cm | 30pcs/CTN | 10.5/11kg |

## PH20-4.0A — CHARGER



| | |
|---|---|
| Input Voltage: | 220-240V~50/60Hz |
| Output Voltage: | 20V |
| Output Current: | 4.0A |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105200702010 | 41x31x32cm | 30pcs/CTN | 10.5/11.5kg |

## PC20403 — 20V/40V CHARGER



| | |
|---|---|
| Input Voltage: | 100-240V~,50-60Hz |
| Output Voltage: | DC 21.5V/42V |
| Output Current: | 4A/2.4A |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105201201010 | 30.5x19.5x24.5cm | 6/CTN | 12/13.2 |

## PC20301 — 20V CHARGER



| | |
|---|---|
| Input Voltage: | 200-240V ,50-60Hz |
| Output Voltage: | DC 20V |
| Output Current: | 21.5V 2.4AX2 |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105201301010 | 30.5x19.5x24.5cm | 6/CTN | 12/13.2 |

## PC20401 — 20V/40V CHARGER



| | |
|---|---|
| Input Voltage: | 220-240V~50/60Hz |
| Output Voltage: | 20V/40V |
| Output Current: | 2.5A/4.0A |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105200201010 | 60x53.1x36cm | 20pcs/CTN | 16.7/17.7kg |

## PC20402 — 12V/20V/40V CHARGER



| | |
|---|---|
| Input Voltage: | 220-240V~50/60Hz |
| Output Voltage: | 12V/20V/40V |
| Output Current: | 2.0A/2.5A/4.0A |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105200301010 | 60x53.1x36cm | 20pcs/CTN | 16.7/17.7kg |

## PC20802 — 20V/40V CHARGER



| | |
|---|---|
| Input Voltage: | 100-240V~,50-60Hz |
| Output Voltage: | DC 20V/40V |
| Output Current: | 8.0A/4.0A |

20V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105201003010 | 30.5x19.5x24.5cm | 16/CTN | 18/19 |

## PK12-1.5A — CHARGER



| | |
|---|---|
| Input Voltage: | 100-240V~50/60Hz |
| Output Voltage: | DC 12V |
| Output Current: | 1.5A |

12V ONE POWER

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105200502010 | 37.7x30.6x46cm | 48pcs/CTN | 12.5/13kg |



# LITHIUM BATTERY FAST CHARGER




### INTELLIGENT RECOGNITION

Intelligently identifies and applies different charging currents based on battery capacity.




### OVERCHARGE PROTECTION

Charging automatically stops upon completion; internal overheat protection triggers a red warning and halts operation when excessive temperature is detected.




### MULTIPLE VENTILATION PORTS + BUILT-IN COOLING FAN

(2 units: exhaust + intake) reduce heat generation from the charger and battery during charging.




## PC20801 — 20V/40V CHARGER

| | |
|---|---|
| Input Voltage: | 220-240V~50/60Hz |
| Output Voltage: | 20V/40V |
| Output Current: | 8.0A/4.0A |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105200803010 | 60 × 53 × 36 cm | 20 pcs/CTN | 18/19kg |



# P.I.T. Ultra

## POWERFUL PERFORMANCE
## RUGGED DURABILITY

### PWS125-C15 ANGLE GRINDER

100% MORE EFFICIENCY PER WORKING HOUR



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1400W |
| No-load Speed: | 4500–11000 r/min |
| Wheel Diameter: | Ø125 mm (5") |
| Spindle Thread: | M14 |

P.I.T. Ultra

BL MOTOR

QCG QUICK-CHANGE GUARD

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100303202010 | 37x26x24.5cm | 4pc/CTN | 10/10.5kg |
| 100303203010 | 37x26x24.5cm | 4pc/CTN | 10/10.5kg |

### PBH50-C ELECTRIC HAMMER DRILL

30% MORE HOLES PER WORKING HOUR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Input Power: | 1500W |
| Impact Rate: | 1200-3100ipm |
| Impact Energy: | 5-15J |
| Specification: | Ø50mm (2") |

P.I.T. Ultra

AVC ADJUSTABLE VARIABLE CONTROL

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100102701010 | 65x17.5x43cm | 1pc/CTN | 15/16kg |
| | | | |

### GSH65-C10 DEMOLITION BREAKER HAMMER

30% MORE DEMOLITION PER WORKING HOUR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Input Power: | 1700W |
| Impact Rate: | 1650 ipm |
| Impact Energy: | 55J |
| | |

P.I.T. Ultra

AVC ADJUSTABLE VARIABLE CONTROL

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100201501010 | 86.5x21x36.5cm | 1pc/CTN | 19/28kg |
| | | | |

### GSH90-C4 DEMOLITION BREAKER HAMMER

55% MORE DEMOLITION PER WORKING HOUR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Input Power: | 2000W |
| Impact Rate: | 1300ipm |
| Impact Energy: | 75J |
| | |

P.I.T. Ultra

AVC ADJUSTABLE VARIABLE CONTROL

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100201601010 | 84x55x17.8cm | 1pc/CTN | 31/39kg |
| | | | |

### PWD120-C DIAMOND CORE DRILL

50% MORE HOLES PER WORKING HOUR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Input Power: | 1800W |
| Speed: | 0-2200r/min |
| Specification: | Ø120 mm (4-3/4") |
| | |

P.I.T. Ultra

CVT CONTINUOUSLY VARIABLE TECHNOLOGY

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106600101010 | 46.5x27.5x35.5cm | 2pcs/CTN | 17.5/18kg |
| | | | |

### PWD150-C DIAMOND CORE DRILL

50% MORE HOLES PER WORKING HOUR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Input Power: | 2000W |
| Speed: | 1300/2350 r/min |
| Specification: | Ø150mm (6") |
| | |

P.I.T. Ultra

CVT CONTINUOUSLY VARIABLE TECHNOLOGY

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106600201010 | 55.5x28x39.5cm | 1pc/CTN | 9.9/10.5kg |
| | | | |

## PWD180-C DIAMOND CORE DRILL

50% MORE HOLES PER WORKING HOUR

WET DRILLING



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Input Power: | 2300W |
| Speed: | 0-1600r/min |
| Specification: | Ø180 mm (7-1/16") |

P.I.T. Ultra

RCD RESIDUAL-CURRENT DEVICE

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106600301010 | 83.5x35x19cm | 1pc/CTN | 20.2/21.2kg |

## PWD230-C DIAMOND CORE DRILL

50% MORE HOLES PER WORKING HOUR

WET DRILLING



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Input Power: | 3200W |
| Speed: | 700 r/min |
| Specification: | Ø230mm (9") |

P.I.T. Ultra

RCD RESIDUAL-CURRENT DEVICE

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106600401010 | 100.1x31.5x43.8cm | 1pc/CTN | 26.8/31kg |

## PWD230-C1 DIAMOND CORE DRILL

50% MORE HOLES PER WORKING HOUR

WET DRILLING



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Input Power: | 3200W |
| Speed: | 700r/min |
| Specification: | Ø230 mm (9-1/16") |

P.I.T. Ultra

RCD RESIDUAL-CURRENT DEVICE

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106600501010 | 108.5x38x38cm | 1pc/CTN | 30/34.5kg |


## PVC40-C VACUUM CLEANER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Input Power: | 1600W |
| Capacity: | 40L |
| Max. Sealed Suction: | 22 kPa |

P.I.T. Ultra

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105800702010 | 64x39x61cm | 1pc/CTN | 19/21.2kg |

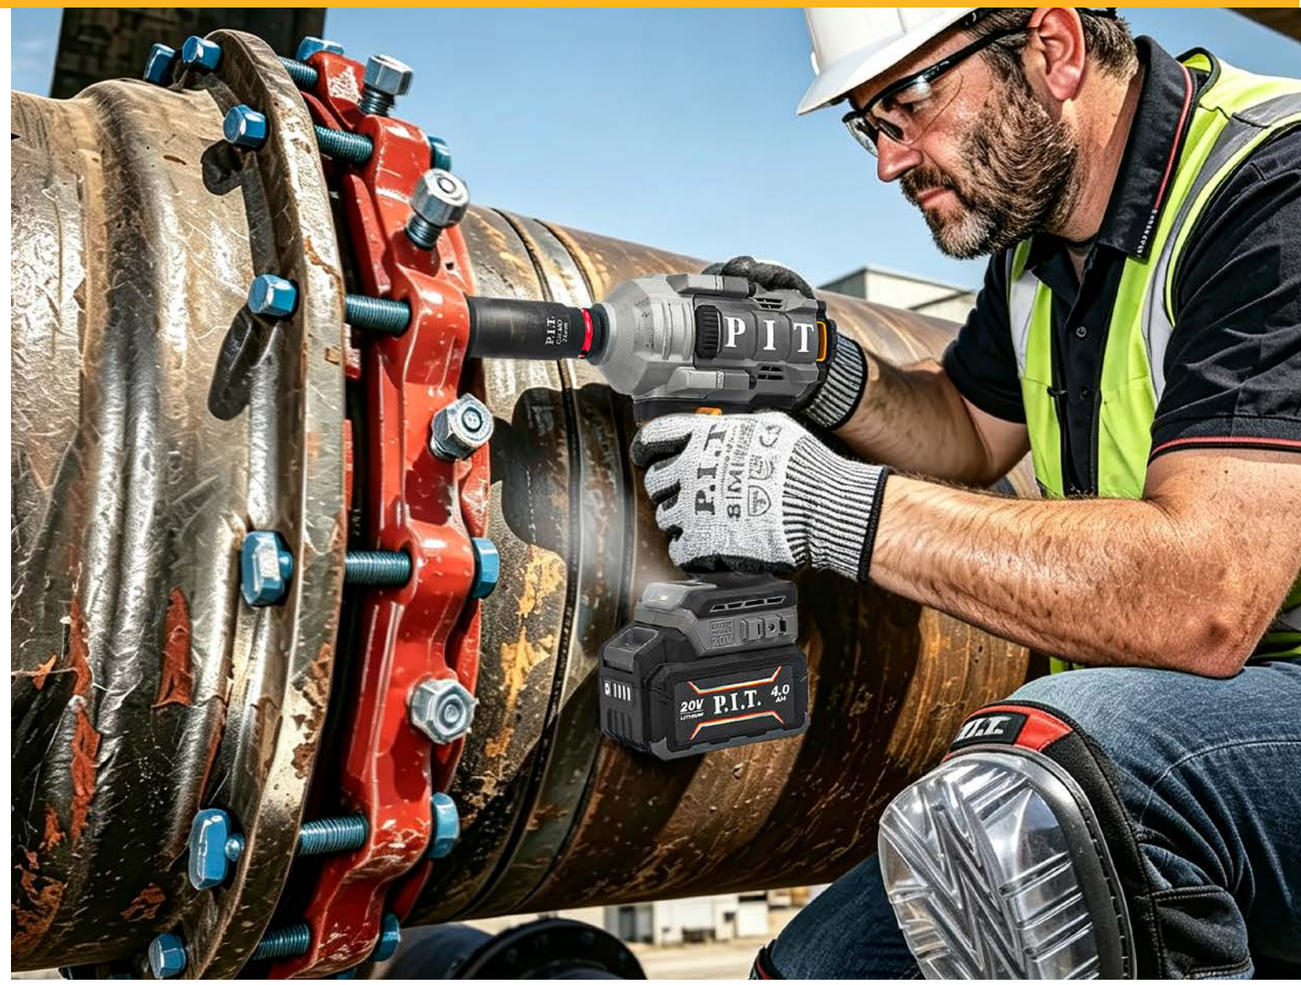

## PSD20H-205A CORDLESS IMPACT DRIVER

20% MORE EFFICIENCY PER WORKING HOUR



| | |
|---|---|
| Voltage: | DC 20V |
| Max Torque: | 205 N·m |
| No Load Speed: | 1100/3150/3800r/min |
| Impact Rate: | 2300/3500/3900ipm |
| Chuck size : | 1/4"(6.35mm) |

BL MOTOR P.I.T. Ultra

STS SMART THIN-METAL STOP

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101800701010 | / | / | 39x31.5x29.8cm | 10 | 10.6/11.6kg |
| 101800703210 | PH20401x1pc | 1pc | 39x31.5x29.8cm | 10 | 13.2/14.7kg |

## PIW20H-900A CORDLESS BRUSHLESS IMPACT WRENCH

30% MORE EFFICIENCY PER WORKING HOUR



| | |
|---|---|
| Voltage: | DC 20V |
| Torque: | 900N·m |
| Speed: | 600/1300/2100 r/min |
| Impact Rate: | 3000ipm |
| Specification: | 1/2" |

BL MOTOR P.I.T. Ultra

AFT ACTIVE FEEDBACK SENSING TECHNOLOGY

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101600801010 | / | / | 47.5x27.5x24.5cm | 6 | 14.5/16kg |
| 101600803210 | PH20401x1pc | 1pc | 47.5x27.5x24.5cm | 6 | 14.5/16kg |

## PST20H-140A CORDLESS JIGSAW

30% MORE EFFICIENCY PER WORKING HOUR



| | |
|---|---|
| Voltage: | DC 20V |
| Strokes Per Minute: | 800-3500spm |
| Cutting Depth (wood): | 135mm |
| Cutting Depth (metal): | 10mm |
| Stroke Length: | 26mm |

BL MOTOR P.I.T. Ultra

SOFT NO LOAD

TBC TOOL-LESS BLADE CHANGE

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102401701010 | / | / | 39x31.5x29.8cm | 4 | 10.6/11.6kg |
| 102401702110 | PH20401x1pc | 1pc | 53x44x33cm | 4 | 13.2/14.7kg |

## PKS20H-165C 20V CORDLESS PLUNGE CIRCULAR SAW



| | |
|---|---|
| Voltage: | DC20V+20V |
| No-load Speed: | 2,500-5,500 r/min |
| Max.Cutting depth: | 59/42.5mm |
| Blade Diameter: | Ø165mm (6-1/2") |
| Angle Adjustment: | -1°-47° |

BL MOTOR P.I.T. Ultra

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102502001210 | / | / | / | / | / |




## PLM40M-460A 40V CORDLESS BRUSHLESS LAWN MOWER



| | |
|---|---|
| Voltage: | DC 40V |
| Speed: | 2800r/min |
| Specification: | 460mm(18") |
| Mowing Height: | 25-75mm |
| Grass Collection Capacity: | 50L |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106201002110 | PH40601x1pc | 1pc | 89x56x45cm | 1pc/CTN | 25/28kg |
| | | | | | |

## PLM40M-510A 40V CORDLESS LAWN MOWER



| | |
|---|---|
| Voltage: | DC 40V |
| Speed: | 2800r/min |
| Specification: | 510mm(20") |
| Mowing Height: | 25-75mm |
| Grass Collection Capacity: | 50L |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106201103110 | PH40801x1pc | 1pc | 108x59x47cm | 1pc/CTN | 29/34.5kg |
| | | | | | |

## PHE40G-600A 40V CORDLESS HEDGE TRIMMER



| | |
|---|---|
| Voltage: | DC 40V |
| Cutting Length: | 600mm(24") |
| Cutting Capacity: | 25mm(1") |
| Speed: | 2400spm |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106700601010 | / | / | 112.5x20.5x34.5cm | 2pc/CTN | 5.4/7.1kg |
| 106700602110 | PH40401x1pc | 1pc | 112.5x20.5x34.5cm | 2pc/CTN | 9/10.8kg |

## PSL40G-360A 40V CORDLESS SCARIFIER



| | |
|---|---|
| Voltage: | DC 40V |
| No-load Speed: | 3600r/min |
| Grass Collection Capacity: | 45 L |
| Working Width: | 360mm |
| Working Depth: | -12-5mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107200101010 | PH40401x1pc | 1pc | 62x46x33.5cm | 1pc/CTN | 11.5/12.5kg |
| | | | | | |

## PBO40G-900A 40V CORDLESS BLOWER



| | |
|---|---|
| Voltage: | DC 40V |
| Maximum Air Speed: | 56m/s |
| Maximum Airflow: | 1020m³/h |
| Maximum Speed: | 20000r/min |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106000801010 | / | / | 44x20.5x27.5cm | 1pc/CTN | 1.7/2.35kg |
| | | | | | |

## PRS40G-500A 40V CORDLESS SNOW BLOWER



| | |
|---|---|
| Voltage: | DC 40V |
| Clearing Width: | 508mm(20") |
| Clearing Height: | 300mm(12") |
| Throwing Distance: | 7m |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107300101210 | PH40401x2pcs | 1pc | 63.2x55x44.1cm | 1pc/CTN | 15/21.5kg |
| | | | | | |

## PTR40G-380A 40V CORDLESS TRIMMER



| | |
|---|---|
| Voltage: | DC 40V |
| Speed: | 6500r/min |
| Specification: | 380mm |
| | |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106102001010 | / | / | / | / | / |
| 106102002110 | PH40401x1pc | 1pc | / | / | / |

## PTR40G-380B 40V CORDLESS TRIMMER



| | |
|---|---|
| Voltage: | DC 40V |
| Speed: | 6600r/min |
| Specification: | 380mm(15") |
| Cutting Width (Blade): | 255mm |
| Guide Plate Length: | 254mm(10") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106102101010 | / | / | / | / | / |
| 106102102110 | PH40401x1pc | 1pc | / | / | / |

## PRS40G-530A 40V CORDLESS SNOW BLOWER



| | |
|---|---|
| Voltage: | DC 40V |
| Clearing Width: | 530mm(21") |
| Clearing Height: | 300mm(12") |
| Throwing Distance: | 6m |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107300201210 | PH40601x2pcs | 1pc | 95x60x49cm | 1pc/CTN | 27/30kg |
| | | | | | |

## PRS40G-610A 40V CORDLESS SNOW BLOWER




| | |
|---|---|
| Voltage: | DC 40V |
| Clearing Width: | 610mm(24") |
| Clearing Height: | 350mm(14") |
| Throwing Distance: | 12m |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107300201210 | PH40601x2pcs | 1pc | 115x69x69cm | 1pc/CTN | 60/70kg |
| | | | | | |

P.I.T.

**POWER TOOLS** 20V ONEPOWER

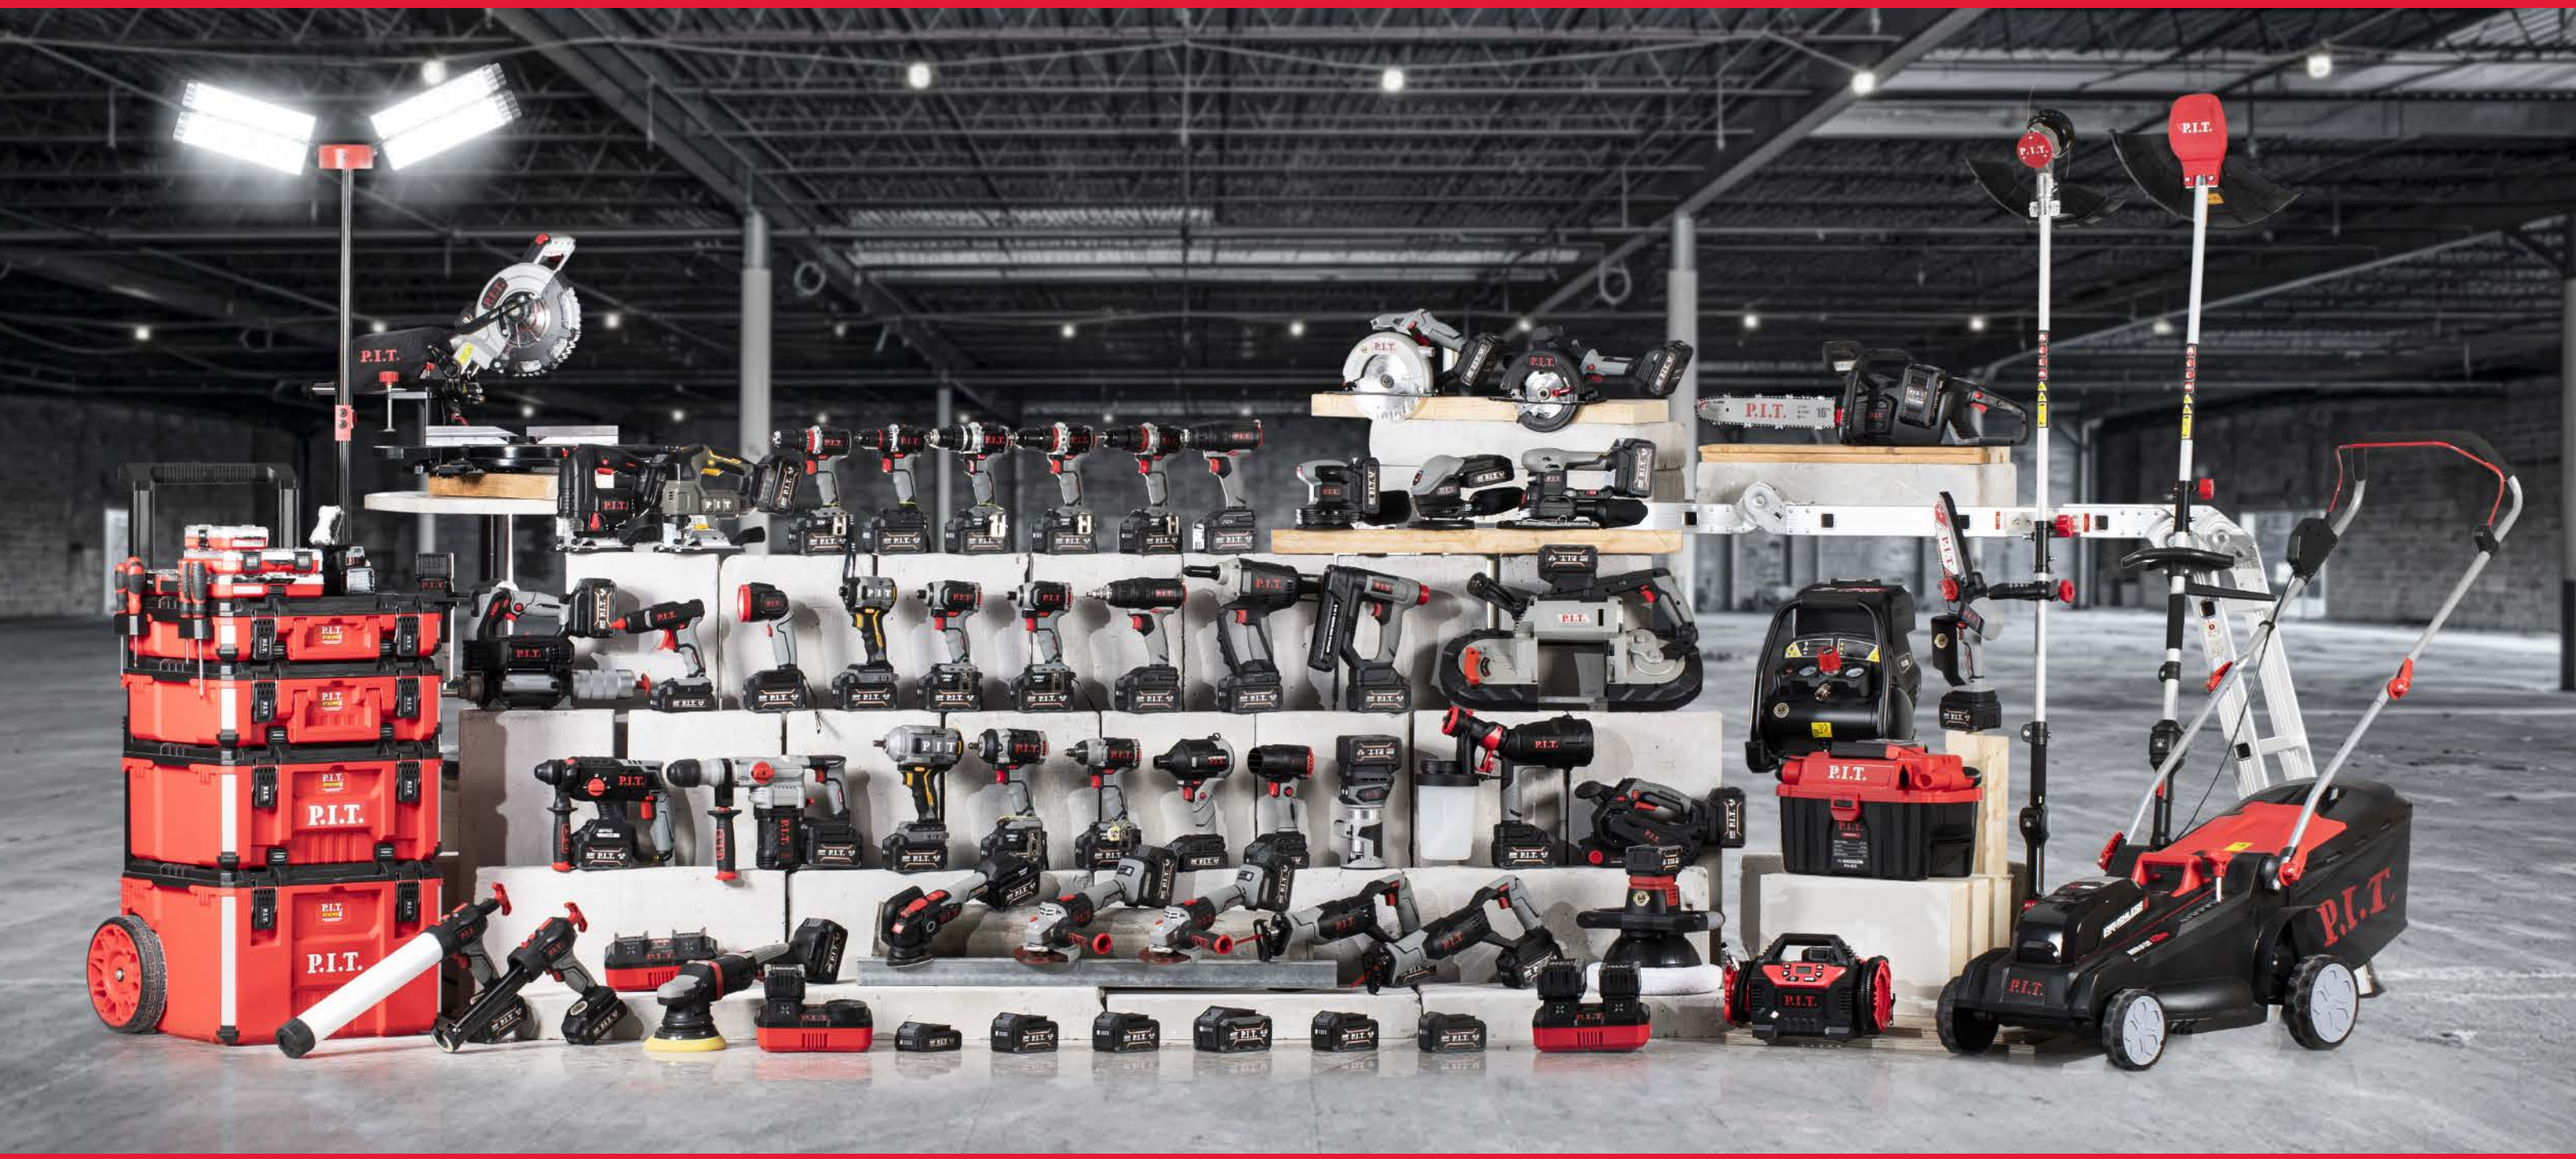


20V ONE POWER


# ONEPOWER SYSTEM

## More Tools. More Power.





**1 UNIVERSAL COMPATIBILITY**

- One battery powers every P.I.T. 20V ONEPOWER tool.



**2 HIGHER PERFORMANCE**

- Stable power for every demanding task.



**3 SMART PROTECTION**

- Premium cells with intelligent battery protection.



## PBM20H-10C 20V CORDLESS DRILL



| | |
|---|---|
| Voltage: | DC 20V |
| Chuck Capacity: | Ø0.8-10mm(3/8") |
| No-load Speed: | 0-450/1500r/min |
| Max. Torque: | 50N.m (443in-lbf) |
| Torque Setting: | 20+1 |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101300501010 | / | / | 47.7x35.2x23.2cm | 12pcs/CTN | 13/14kg |
| 101300507210 | PH20401x2pc | 1pc | 51.5x37.7x33.1cm | 4pcs/CTN | 15/16kg |
| | | | | | |
| | | | | | |

## PBM20H-13A 20V CORDLESS DRILL



| | |
|---|---|
| Voltage: | DC 20V |
| Chuck Capacity: | Ø0.8-13mm(1/2") |
| No-load Speed: | 350/2000r/min |
| Max. Torque: | 70N.m (700in-lbf) |
| Torque Setting: | 20+1 |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101301601010 | / | / | 47.7x35.2x23.2cm | 12pcs/CTN | 13/14kg |
| 101301602210 | PH20401x2pc | 1pc | 51.5x37.7x33.1cm | 4pcs/CTN | 15/16kg |
| | | | | | |
| | | | | | |

## PSB20H-13C/5 20V CORDLESS IMPACT DRILL



| | |
|---|---|
| Voltage: | DC 20V |
| Chuck Capacity: | Ø1.5-13mm(1/2") |
| No-load Speed: | 0-450/0-1800r/min |
| Impact Rate: | 0-6750/0-27000ipm |
| Max. Torque: | 100N.m(885in-lbf) |
| Torque Setting: | 20+3 |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101400401010 | / | / | 33.5x33x39cm | 8pcs/CTN | 15.5/16kg |
| 101400402110 | PH20401x1pc | 1pc | 33.5x33x39cm | 8pcs/CTN | 15.5/16kg |
| 101400406210 | PH20401x2pc | 1pc | 51.5x28x42.5cm | 2pcs/CTN | 11/12kg |
| 101400407210 | PH20401x2pc | 1pc | 33.5x33x39cm | 8pcs/CTN | 15.5/16kg |

## PSB20H-13D/5 20V CORDLESS IMPACT DRILL



| | |
|---|---|
| Voltage: | DC 20V |
| Chuck Capacity: | Ø1.5-13mm(1/2") |
| No-load Speed: | 0-350/2000r/min |
| Impact Rate: | 0-4500/0-30000ipm |
| Max. Torque: | 80N.m(708in-lbf) |
| Torque Setting: | 20+1+1 |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101401601010 | / | / | 42x31.5x23.5cm | 8pcs/CTN | 13.5/14.5kg |
| 101401604110 | PH20401x1pc | 1pc | 50.3x42.5x31.7cm | 4pcs/CTN | 17.5/18.5kg |
| 101401605210 | PH20401x2pc | 1pc | 42x37x32cm | 3pcs/CTN | 15/16kg |
| | | | | | |

## PIW20H-350A 20V CORDLESS IMPACT WRENCH



| | |
|---|---|
| Voltage: | DC 20V |
| No-load Speed: | 0-1500/2000/2400r/min |
| Max. Torque: | 350N·m (3098 in-lbf) |
| Impact Rate: | 3600ipm |
| Holder(Square/Hex): | 1/2" |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101601101010 | / | / | 36.8x32x23.5cm | 8pcs/CTN | 14.5/15kg |
| 101601105210 | PH20201x1pc | 1pc | 51.5x37.7x33.1cm | 4pcs/CTN | 17/18kg |
| | | | | | |
| | | | | | |

## PIW20H-600A 20V CORDLESS IMPACT WRENCH



| | |
|---|---|
| Voltage: | DC 20V |
| No-load Speed: | 0-1380/1850/2200r/min |
| Max. Torque: | 600N.m(5310in-lbf) |
| Impact Rate: | 1850/2100/2800ipm |
| Holder(Square/Hex): | 12.7mm/(1/2") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101600301010 | / | / | 38.3x33.5x25.2cm | 8pcs/CTN | 15.5/16.5kg |
| 101600303210 | PH20401x2pc | 1pc | 38.7x37.7x33.1cm | 3pcs/CTN | 14.5/15.5kg |
| | | | | | |
| | | | | | |

## PSD20H-170A 20V CORDLESS IMPACT DRIVER



| | |
|---|---|
| Voltage: | DC 20V |
| Chuck Capacity: | Ø6.35mm(1/4") |
| No-load Speed: | 0-1300/2200/3300r/min |
| Max. Torque: | 170N.m(1505in-lbf) |
| Max Impact Rate: | 3500ipm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101800201010 | / | / | 39.5x33x23.8cm | 10pcs/CTN | 13.5/14.5kg |
| 101800203210 | PH20201x2pc | 1pc | 36.5x36x32.5cm | 3pcs/CTN | 10.5/11.5kg |
| | | | | | |
| | | | | | |

## PSD20H-230A 20V CORDLESS IMPACT DRIVER



| | |
|---|---|
| Voltage: | DC 20V |
| Chuck Capacity: | Ø6.35mm(1/4") |
| No-load Speed: | 0-1300/2200/3300r/min |
| Max. Torque: | 230N.m(2035in-lbf) |
| Max Impact Rate: | 3500ipm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101800301010 | / | / | 39.5x33x23.8cm | 10pcs/CTN | 13.5/14kg |
| 101800303210 | PH20201x2pc | 1pc | 37x36.7x34cm | 3pcs/CTN | 14/15kg |
| | | | | | |
| | | | | | |

## PWS20H-125E 20V 125MM ANGLE GRINDER



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 4000/6000/8000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle Thread: | M14 |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100304401010 | / | / | 52x34.5x24cm | 8pcs/CTN | 15.5/16.5kg |
| 100304402210 | PH20401x2pc | 1pc | 56x41x33.5cm | 3pcs/CTN | 15.5/17.5kg |
| | | | | | |
| | | | | | |

## PWS20H-125D/5 20V 125MM ANGLE GRINDER



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 4000/6000/8000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle thread: | M14 |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100304001010 | / | / | 51.5x28x42.5cm | 8pcs/CTN | 16.5/17kg |
| 100304002210 | PH20401x2pc | 1pc | 41.5x40.5x33cm | 3pcs/CTN | 15.5/16.5kg |
| 100304004210 | PH20401x2pc | 1pc | 41.5x40.5x33cm | 2pcs/CTN | 12/13kg |
| | | | | | |

## PPO20H-125A 20V BRUSHLESS POLISHER MACHINE



| | |
|---|---|
| Voltage: | DC 20V |
| No-Load Speed: | 2300-3800r/min |
| Max. disc diameter: | Ø125mm(4-15/16") |
| Eccentricity: | 15 mm |


| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100400101010 | / | / | 49x47.5x33.5cm | 6pcs/CTN | 16/17.5kg |
| | | | | | |
| | | | | | |
| | | | | | |

## PPO20H-250A 20V POLISHER MACHINE



| | |
|---|---|
| Voltage: | DC 20V |
| No-Load Speed: | 2500r/min |
| Max. disc diameter: | Ø254mm(10") |
| Eccentricity: | 5 mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100400201010 | / | / | 55x28x50.5cm | 4pcs/CTN | 11.5/12.5kg |
| | | | | | |
| | | | | | |
| | | | | | |

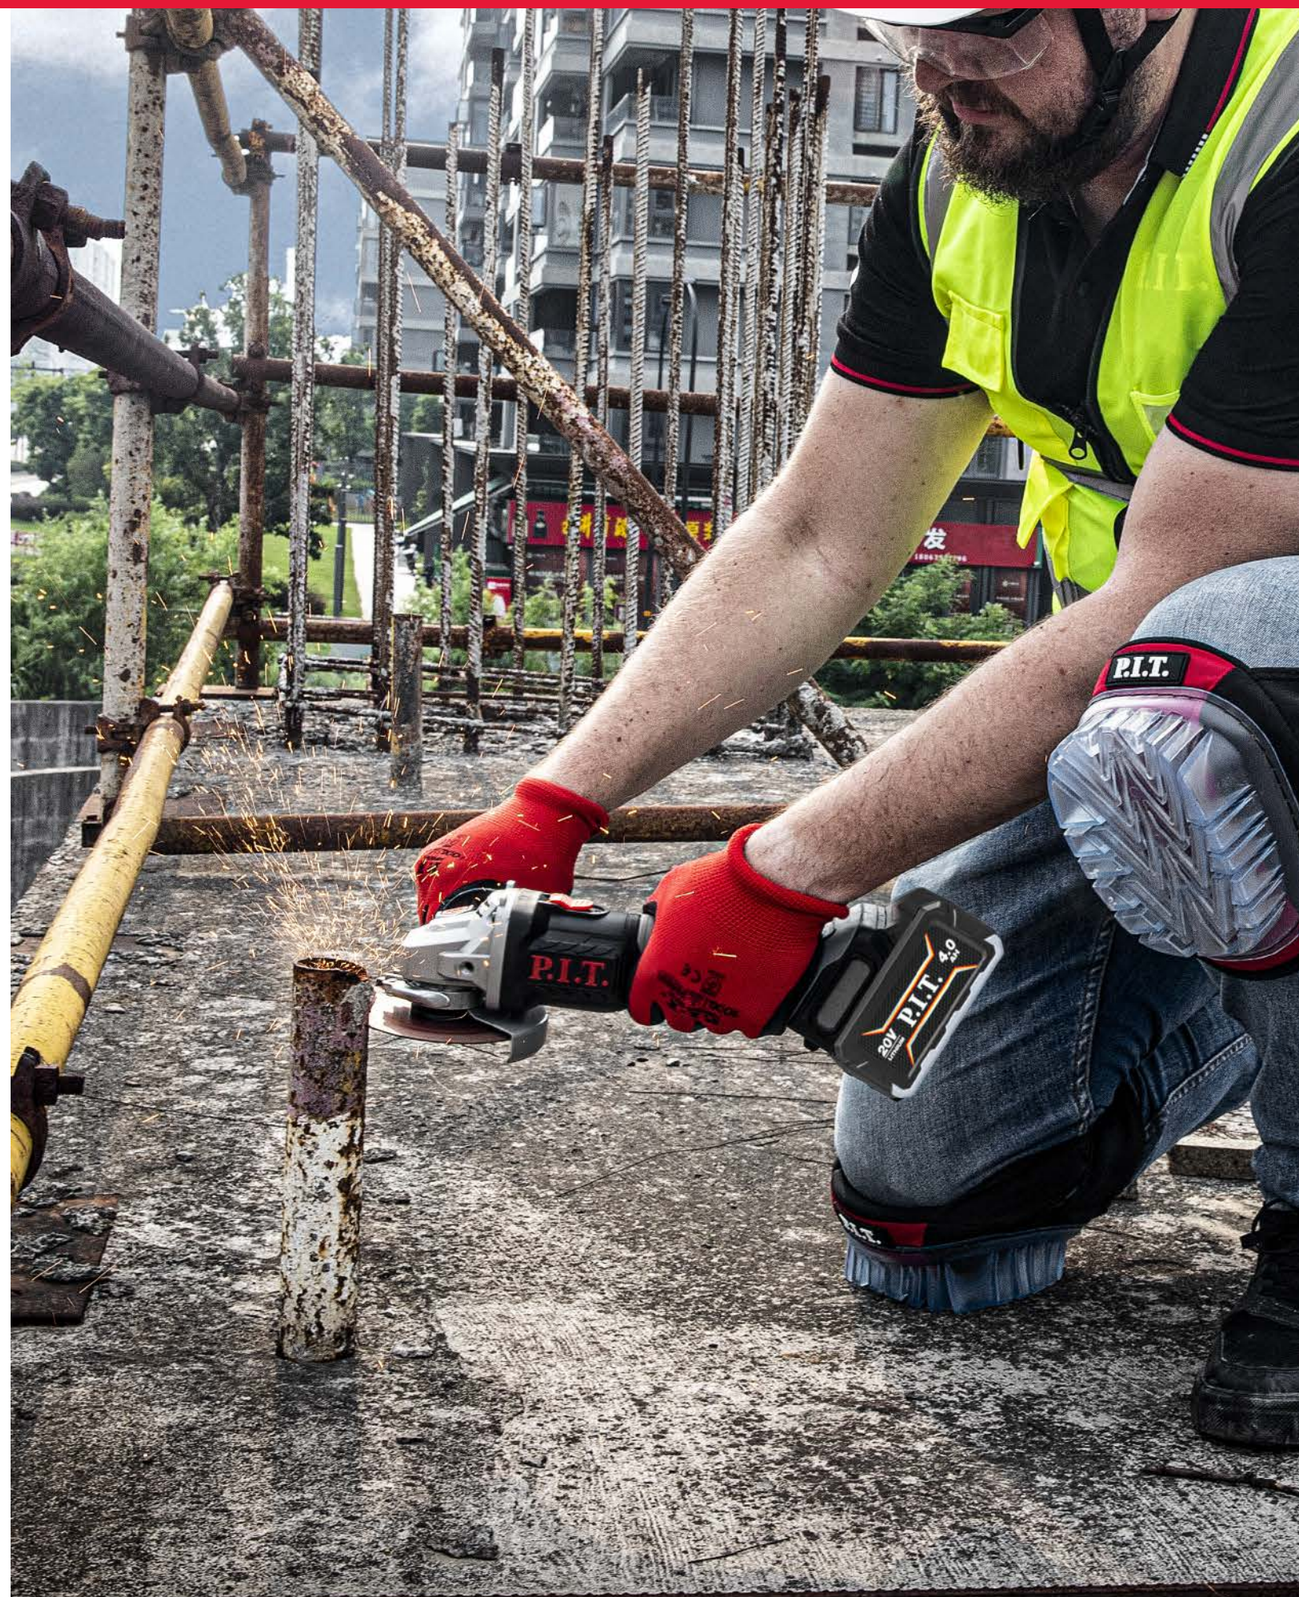

## PBH20H-22C 20V CORDLESS BRUSHLESS ROTARY HAMMER



| | |
|---|---|
| Voltage: | DC 20V |
| Speed: | 0-1350r/min |
| Impact Rate: | 0-4700ipm |
| Impact Energy: | 1.8J |
| Specification: | Ø22mm (7/8") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100103402010 | / | / | / | / | / |
| 100103401210 | PH20401x1pc | 1pc | / | / | / |
| | | | | | |

## PBH20H-26A 20V CORDLESS BRUSHLESS ROTARY HAMMER



| | |
|---|---|
| Voltage: | DC 20V |
| Speed: | 0-800r/min |
| Impact Rate: | 0-3800ipm |
| Impact Energy: | 5J |
| Specification: | Ø26mm (1") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100100401010 | / | / | 40.8x29.5x27.8cm | 3pcs/CTN | 14.7/15.7kg |
| 100100403210 | PH20401x2pc | 1pc | 51.3x29.5x37.5cm | 2pcs/CTN | 18/19kg |
| | | | | | |

## PBH20H-26B 20V CORDLESS BRUSHLESS ROTARY HAMMER



| | |
|---|---|
| Voltage: | DC 20V |
| Speed: | 0-1030r/min |
| Impact Rate: | 0-4500ipm |
| Impact Energy: | 3.2J |
| Specification: | Ø26mm(1") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100103801010 | / | / | 40.8x29.5x27.8cm | 3pcs/CTN | 14.7/15.7kg |
| 100103802110 | PH20401x1pc | 1pc | 51.3x29.5x37.5cm | 2pcs/CTN | 17/18kg |
| 100103803210 | PH20401x2pc | 1pc | 51.3x29.5x37.5cm | 2pcs/CTN | 18/19kg |

## PVC20H-0.5B 20V VACUUM CLEANER



| | |
|---|---|
| Voltage: | DC 20V |
| No Load Speed: | 0-36000r/min |
| Capacity: | 270mL |
| Max Sealed Suction: | ≥2.5Kpa |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 105801001010 | / | / | 69.5x37.5x32cm | 6pcs/CTN | / |
| | | | | | |
| | | | | | |

## PBH20H-32A 20V CORDLESS BRUSHLESS ROTARY HAMMER



| | |
|---|---|
| Voltage: | DC 20V |
| Speed: | 0-760r/min |
| Impact Rate: | 0-3800ipm |
| Impact Energy: | 4.5J |
| Specification: | Ø32mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100103901010 | / | / | 43x26x31cm | 2pcs/CTN | / |
| 100103902110 | PH20401x1pc | 1pc | 51.3x29.5x37.5cm | 2pcs/CTN | / |
| 100103903210 | PH20401x2pc | 1pc | 51.3x29.5x37.5cm | 2pcs/CTN | / |
| | | | | | |






## PST20H-65A 20V CORDLESS JIG SAW



| | |
|---|---|
| Voltage: | DC 20V |
| No Load Stroke Rate: | 0-3000 spm |
| Stroke Length: | 20mm |
| Max. Cutting Capacity(Wood): | 65mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102401501010 | / | / | 48x25.5x23cm | 6pcs/CTN | 10/11kg |
| 102401502110 | PH20201x1pc | 1pc | 48x25.5x23cm | 4pcs/CTN | 15/16kg |
| | | | | | |

## PST20H-110A 20V CORDLESS JIG SAW



| | |
|---|---|
| Voltage: | DC 20V |
| No Load Stroke Rate: | 800-3500 spm |
| Stroke Length: | 23mm |
| Max. Cutting Capacity(Wood): | 105 mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102401601010 | / | / | 51x26x24cm | 6pcs/CTN | 12/13.5kg |
| 102401602110 | PH20201x1pc | 1pc | 51x43x32.7cm | 4pcs/CTN | 16.5/17.5kg |
| | | | | | |

## PKS20H-150A 20V CORDLESS CIRCULAR SAW



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 0-6500r/min |
| Blade Diameter: | Ø150mm |
| Max. Cutting Depth(90°/45°): | 56mm/41mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102500101010 | / | / | 54x42x36.5cm | 6pcs/CTN | 11.7/12.3kg |
| | | | | | |
| | | | | | |

## PKS20H-165D 20V CORDLESS CIRCULAR SAW



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 5200r/min |
| Max.Cutting depth (0°/45°): | 57/38mm(2-1/4")/(1-1/2") |
| Disc Diameter: | Ø165mm (6-1/2"") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102501801010 | / | / | 41x34.2x41.5cm | 4pcs/CTN | 12/13kg |
| 102501802110 | PH20401x1pc | 1pc | 41x34.2x41.5cm | 4pcs/CTN | / |
| | | | | | |

## PKS20H-165B 20V CORDLESS CIRCULAR SAW



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 5500r/min |
| Max.Cutting depth (0°/45°): | 57/38mm(2-1/4")/(1-1/2") |
| Disc Diameter: | Ø165mm (6-1/2") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102501701010 | / | / | 41x34.2x41.5cm | 4pcs/CTN | 12/13kg |
| 102501702110 | PH20401x1pc | 1pc | 41x34.2x41.5cm | 4pcs/CTN | / |
| | | | | | |



## PSA20H-115B 20V CORDLESS RECIPROCATING SAW



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 0-3000spm |
| Max. Cutting Capacity(Wood): | 115mm |
| Stroke Length: | 22mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102600601010 | / | / | / | / | / |

## PBS20H-75A 20V CORDLESS BELT SANDER



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 120-380m/min |
| Belt Size: | 76*457mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100700101010 | / | / | 34x29x40cm | 4pcs/CTN | 11.5/12.5kg |

## PSP20H-140A 20V CORDLESS DETAIL SANDER



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 12000r/min |
| Specifications: | 140x140x80mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100900601010 | / | / | 50x22.5x34cm | 8pcs/CTN | 8/8.5kg |

## PER20H-6A 20V CORDLESS TRIMMER



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 12000-28000r/min |
| Max.Collet Capacity: | Ø6mm(1/4") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102800101010 | / | / | 44.5x40.5x25cm | 8pcs/CTN | 16.5/17kg |

## PEP20H-82A 20V CORDLESS PLANER



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 16000r/min |
| Planing width: | 82mm(3-1/4") |
| Max.Planing depth: | 2mm(5/64") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102700101010 | / | / | 37x32x39cm | 4pcs/CTN | 11.5/12.5kg |

## PDS20H-125A 20V CORDLESS ORBITAL SANDER



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 6000-10000r/min |
| Sanding Pad Diameter: | Ø125mm(5") |
| Eccentricity: | 2mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100800101010 | / | / | 52x21x31cm | 8pcs/CTN | 9.6/10.6kg |

## PSP20H-187A 20V CORDLESS MULTI-PURPOSE SANDER



| | |
|---|---|
| Voltage: | DC 20V |
| Vibration frequency: | 6000-12000 r/min |
| Circular Sanding Specifications: | 125mm(5") |
| Flat sand specifications: | 187x90mm(7-3/8"x3-9/16") |
| Mouse sand specifications: | 140x140x80mm (5-1/2" x5-1/2"x3-1/8") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 100900101010 | / | / | 41x28.5x36cm | 6pcs/CTN | 11/11.5kg |


## PRPS01-6A PLUNGE BASE FOR ROUTER

Use with PER20H-6A



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 12000-28000r/min |
| Max.Collet Capacity: | Ø6mm(1/4") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 204800101000 | / | / | 50.5x38x38cm | 8pcs/CTN | 14.9/15.9kg |

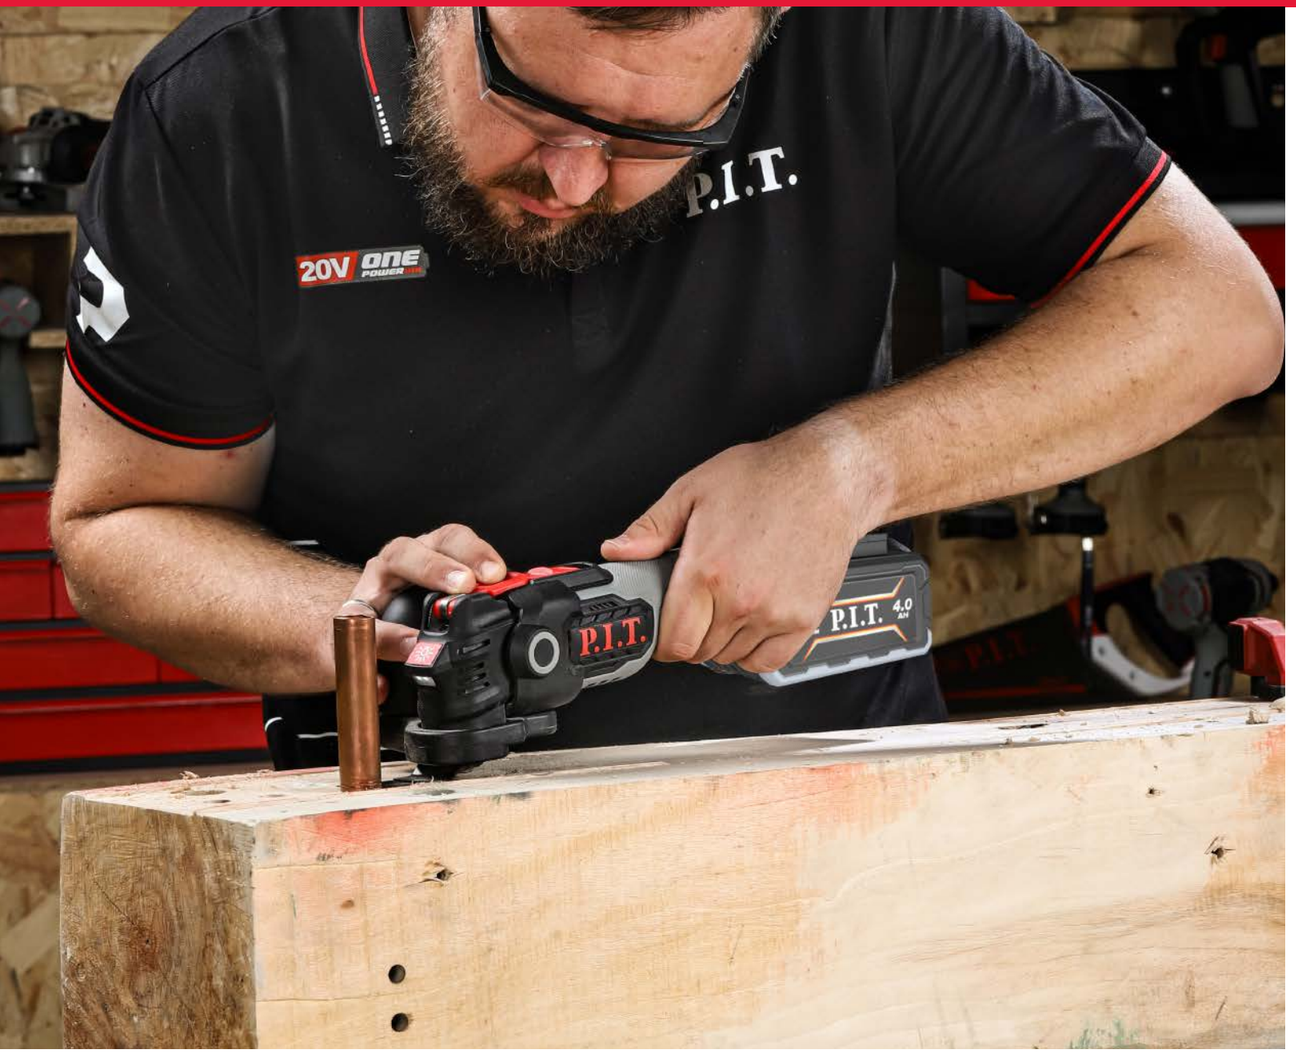


## PMT20H-035B — 20V CORDLESS BRUSHLESS MULTI-TOOL




| | |
|---|---|
| Voltage: | DC 20V |
| Oscillation Rate: | 5000-19000opm |
| Oscillation Angle: | 3.6° |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102100201010 | / | / | 55.5x37x25cm | 10pcs/CTN | 14/14.5kg |
| 102100202110 | PH20201x1pc | 1pc | 64.5x41.2x32.2cm | 5pcs/CTN | 16/17kg |
| 102100203210 | PH20201x2pc | 1pc | 52x41.2x32.2cm | 4pcs/CTN | 16/17kg |

## PMS20H-210A — 20V CORDLESS MITER SAW



| | |
|---|---|
| Voltage: | DC 20V |
| Rated speed: | 0-4500r/min |
| Saw blade diameter: | Ø210mm(8-1/4") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 103200101010 | / | / | 77.5x46x35.5cm | 1pc/CTN | 9/11.5kg |

## PMS20H-210B — 20V CORDLESS MITER SAW



| | |
|---|---|
| Voltage: | DC 20V |
| Rated speed: | 4200r/min |
| Saw blade diameter: | Ø210mm(8-1/4") |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 103200201010 | / | / | 53x34x30.5cm | 1pc/CTN | 5.7/7.1kg |

## PHS20H-127A — 20V CORDLESS BAND SAW



| | |
|---|---|
| Voltage: | DC 20V |
| Line speed: | 0-2m/s |
| Maximum cutting capacity: | 127mmx115mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102200101010 | / | / | 62.5x37x47.5cm | 2pcs/CTN | 14.5/16kg |

## ABSB-4514C — SAW BLADE

Use with PHS20H-127A



| | |
|---|---|
| Voltage: | DC 20V |
| Line speed: | 0-2m/s |
| Maximum cutting capacity: | 127mm x 115mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 203305301000 | / | / | / | / | / |

## PST20H-15/1013A — 20V CORDLESS BRAD NAILER



| | |
|---|---|
| Voltage: | DC 20V |
| Magazine Capacity: | 100pcs |
| Nail Type: | 15mm/8-14mm |
| Cycle Rate: | 20pcs/min |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 103800101010 | / | / | 40x29.5x26.5cm | 5pcs/CTN | 9/9.5kg |

## PST20H-30/625A — 20V CORDLESS BRAD NAILER



| | |
|---|---|
| Voltage: | DC 20V |
| Magazine Capacity: | 100pcs |
| Nail Type: | 15mm-32mm/15-25mm |
| Cycle Rate: | 20pcs/min |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 103800201010 | / | / | 42.5×30.5×26.5cm | 4pcs/CTN | 10.5/11.5kg |

## PRG20H-5A — 20V CORDLESS BRUSHLESS RIVET GUN



| | |
|---|---|
| Voltage: | DC 20V |
| Max pulling force: | 20000 N |
| Work stroke: | 25 mm |
| Rivet diameter: | 2.4-4.8mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 104300101010 | / | / | 38.5x32x46.5cm | 5pcs/CTN | 12/13kg |

## PEC20H-11A — 20V CORDLESS GLUE GUN



| | |
|---|---|
| Voltage: | DC 20V |
| Capacity: | Ø11mm (7/16") |
| Productivity: | 450g/h |
| Max.temperature: | 200℃ |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 104100101010 | / | / | 46x44.5x20.6cm | 10pcs/CTN | 6/7kg |

## PEC20H-300A 20V CORDLESS CAULKING GUN



| | |
|---|---|
| Voltage:DC 20V | DC 20V |
| Extrusion force: | 3000N |
| Balloon volume: | 300ml |
| | |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 104100201010 | / | / | 41.5×32×31cm | 8pcs/CTN | 9.8/10.8kg |
| 104100301010 | / | / | 61.5x33.5x36.8cm | 8pcs/CTN | 16/17kg |

## PEI20H-60A 20V CORDLESS TOOL KIT



| | |
|---|---|
| Voltage: | DC 20V |
| Speed: | 9000-25000r/min |
| Rated output power: | 60W |
| Temperature range: | 200-450℃ |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 104800101010 | / | / | 28x19.5x26.5cm | 4pcs/CTN | 4.2/4.3kg |
| | | | | | |

## PAC20H-4A 20V CORDLESS AIR COMPRESSOR



| | |
|---|---|
| Voltage: | DC 20V |
| Rated Power: | 350W |
| Tank Capacity: | 4L |
| No Load Speed: | 4500r/min |
| Capacity: | 1.2m³/h |
| Pressure: | 8Bar |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107000101010 | / | / | 36.5x32x37cm | 1pc/CTN | 8/9kg |

## PGG20H-400A 20V RECHARGEABLE GREASE GUN



| | |
|---|---|
| Voltage: | DC 20V |
| Maximum pressure: | 10000 PSI / 5000 PSI |
| Maximum flow: | 100 g/min / 300 g/min |
| Oil pipe length: | 1.2 m |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 104600101010 | / | / | 53.6x32.7x37.6cm | 2pcs/CTN | 13.5/14.5kg |

## PSG20H-800A 20V CORDLESS SPRAY GUN



| | |
|---|---|
| Voltage: | DC 20V |
| Flow Rate: | 800mL |
| Maximum Flow Rate: | 700mL/min |
| Viscosity: | 60DIN-s |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 103900901010 | / | / | / | / | / |

## PSG20H-1500A 20V CORDLESS SPRAY GUN



| | |
|---|---|
| Voltage: | DC 20V |
| Flow Rate: | 1500mL |
| Maximum Flow Rate: | 600mL/min |
| Viscosity: | 70DIN-s |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 103901001010 | / | / | / | / | / |

## PJF20H-250A 20V CORDLESS FAN



| | |
|---|---|
| Voltage: | DC 20V |
| Speed : | 1200/1500/1800r/min |
| Impeller Diameter: | 250mm(10") |
| | |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107900101010 | / | / | 47.4x40.4x30.6cm | 1pcs/CTN | 3.5/4.5kg |

## PAD20H-3A 20V CORDLESS POWER ADAPTER



| | |
|---|---|
| Voltage: | DC 20V |
| Max. charging current: | 2.4A |
| Output Voltage: | 5V±0.1V |
| | |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 108200101010 | / | / | 34x28.5x44.5cm | 100pcs/CTN | 15/15.5kg |

## PSG20H-1200A SPRAY GUN



| | |
|---|---|
| Voltage: | AC/DC |
| Voltage/frequency: | AC 220-240V~50/60Hz |
| | DC20V |
| Flow Rate: | 1200mL |
| Maximum Flow Rate: | AC:1100mL/min DC1000mL/min |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 103901101010 | / | / | / | / | / |

## PHG20H-550A 20V CORDLESS HEAT GUN



| | |
|---|---|
| Voltage: | DC 20V |
| Operational temperature: | 550℃ |
| Air stream: | 200l/min |
| | |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 103700101010 | / | / | 34.5x25x38cm | 8pcs/CTN | 7/7.5kg |

## PMV20H-25A 20V CORDLESS CONCRETE VIBRATOR



| | |
|---|---|
| Voltage: | DC 20V |
| No Load Speed: | 0-3100 r/min |
| Vibration frequency: | 12500vpm |
| | |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 103500101010 | / | / | 42x30.5x38.5cm | 10pcs/CTN | 12.5/13.5kg |

## AMAS16-01525 VIBRATION ROD

Use with PMV20H-25A



| | |
|---|---|
| Voltage: | DC 20V |
| Size: | 25mm ×1.5M (1"×4'11"ft) |
| | |
| | |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 206200301000 | / | / | / | / | / |



## PWL20H-3A 20V CORDLESS WORK LIGHT



| | |
|---|---|
| Voltage: | DC 20V |
| Luminous Flux: | 300lm |
| Power: | 3W |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107800201010 | / | / | 49×32×29cm | 18pcs/CTN | 7/8kg |

## PWL20H-5A 20V CORDLESS WORK LIGHT



| | |
|---|---|
| Voltage: | DC 20V |
| Luminous flux: | 400/200lm |
| Power: | 5W/2.5W |
| USB output current: | 2A |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107800301010 | / | / | 36x29.5x27cm | 40pcs/CTN | 6.5/9kg |

## PWL20H-20A 20V CORDLESS WORK LIGHT



| | |
|---|---|
| Voltage: | DC 20V |
| Luminous Flux: | 900/1900lm |
| Power: | 10W/20W |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107800401010 | / | / | 45×31×29cm | 5pcs/CTN | 9.5/10kg |

## PWL20H-80A 20V CORDLESS TRIPOD WORK LIGHT



| | |
|---|---|
| Voltage: | DC 20V |
| Luminous Flux: | 8000/4000/2000lm |
| Power: | 80/40/20W |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107800501010 | / | / | 89x17x32cm | 2pcs/CTN | 8.5/9.5kg |




## PJS20H-10A 20V CORDLESS BLUETOOTH JOBSITE SPEAKER



| | |
|---|---|
| Voltage: | DC 20V |
| Speaker: | 2x10W |
| USB Output: | DC 5V/2.1A |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 108000101010 | / | / | 54×28×20cm | 4pcs/CTN | 5.6/6kg |

## PAIP20H-11A 20V CORDLESS COMPRESSOR



| | |
|---|---|
| Voltage: | DC20V |
| Electric current: | 0-1100/2100/3300 r/min |
| Max. Pressure: | 0-11Bar(0-160PSI /0-1100Kpa) |
| Temperature: | -20°C-60°C |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 108300101010 | / | / | 35x32.5x43cm | 4pcs/CTN | 7.2/8kg |

## PVC20H-0.5A 20V CORDLESS VACUUM CLEANER



| | |
|---|---|
| Voltage: | DC 20V |
| Dust Cup Capacity: | 500ml |
| Vacuum : | 3.8KPa |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 105800101010 | / | / | 49x30x38cm | 4pcs/CTN | 6/7kg |

## PVC20H-10A 20V CORDLESS VACUUM CLEANER



| | |
|---|---|
| Voltage: | DC20V |
| Capacity: | 10L |
| Max Sealed Suction: | 16Kpa |
| Max.Flow: | 1.0m³/min |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 105800201010 | / | / | 40x27.5x30.5cm | 1pc/CTN | 3.2/4.2kg |

## PBO20H-300A 20V CORDLESS WORKSHOP BLOWER



| | |
|---|---|
| Voltage: | DC 20V |
| Max.Flow: | 0-2.8m³/min |
| No-load Speed: | 0-18000r/min |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106000101010 | / | / | 50x34.5x40cm | 6pcs/CTN | 9/10kg |

## PBO20H-450A 20V CORDLESS BLOWER



| | |
|---|---|
| Voltage: | DC 20V |
| Max.Flow: | 110/180m³/h |
| No-load Speed: | 12000/18000r/min |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106000201010 | / | / | 42x34x52.5cm | 6pcs/CTN | 9/10kg |

## PBO20H-350A 20V CORDLESS BLOWER



| | |
|---|---|
| Voltage: | DC 20V |
| No Load Speed: | 75000rpm |
| Max.Flow : | 66m³/h |
| Wind speed: | 209m/s |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106000401010 | / | / | 60x43.5x28.5cm | 6pcs/CTN | 9.2/10.2kg |

## PBO20H-500A 20V CORDLESS BLOWER



| | |
|---|---|
| Voltage: | DC 20V |
| Max.Flow: | 110/180m³/h |
| No-load Speed: | 12000/18000r/min |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106000901010 | / | / | 51x26.8x38.6cm | 10pcs/CTN | 4.5/7.5kg |



## PTR20H-300B 20V CORDLESS TRIMMER



| | |
|---|---|
| Voltage: | DC 20V |
| No-load Speed: | 8500r/min |
| Cutting Width: | 305mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106102301010 | / | / | 62x44x32.5cm | 4pcs/CTN | 10.5/11kg |
| 106102302110 | PH20201x1pc | 1pc | 62x44x32.5cm | 4pcs/CTN | 10.5/11kg |
| | | | | | |
| | | | | | |

## PTR20H-330A 20V CORDLESS TRIMMER



| | |
|---|---|
| Voltage: | DC 20V |
| No-load Speed: | 5500r/min |
| Cutting Width: | 330mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106100205010 | / | / | 102x13.5x23cm | 1pcs/CTN | 3.5/4.5kg |
| 106100206110 | PH20401x1pc | 1pc | 102x13.5x23cm | 1pcs/CTN | 4.5/5.5kg |
| | | | | | |
| | | | | | |

## PLM20H-330C 20V CORDLESS LAWN MOWER



| | |
|---|---|
| Voltage: | DC 20V |
| No-load Speed: | 3800r/min |
| Width Of Cut: | 330mm |
| Height Of Cut: | 25-65mm |
| Grass Collection Capacity: | 35L |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106201301010 | / | / | / | / | / |
| 106201302110 | PH20401x1pc | 1pc | / | / | / |
| | | | | | |
| | | | | | |

## PLM20H-330C1 20V CORDLESS LAWN MOWER



| | |
|---|---|
| Voltage: | DC 20V+20V |
| No-load Speed: | 3700r/min |
| Width Of Cut: | 330mm |
| Height Of Cut: | 25-65mm |
| Grass Collection Capacity: | 35L |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106201401010 | / | / | / | / | / |
| 106201402210 | PH20401x2pc | 1pc | / | / | / |
| | | | | | |
| | | | | | |

## PLM20H-380C 20V CORDLESS LAWN MOWER



| | |
|---|---|
| Voltage: | DC 20V+20V |
| No-load Speed: | 3300r/min |
| Width Of Cut: | 380mm |
| Height Of Cut: | 25-75mm |
| Grass Collection Capacity: | 40L |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106201901010 | / | / | / | / | / |
| 106201902210 | PH20401x2pc | 1pc | / | / | / |
| | | | | | |
| | | | | | |

## PLM20H-430C 20V CORDLESS LAWN MOWER



| | |
|---|---|
| Voltage: | DC 20V+20V |
| No-load Speed: | 3600r/min |
| Width Of Cut: | 430mm |
| Height Of Cut: | 25-75mm |
| Grass Collection Capacity: | 50L |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106201501010 | / | / | / | / | / |
| 106201502210 | PH20401x2pc | 1pc | / | / | / |
| | | | | | |
| | | | | | |

## PLM20H-430C1 20V CORDLESS LAWN MOWER



| | |
|---|---|
| Voltage: | DC 20V+20V |
| No-load speed: | 2900/3300r/min |
| Mowing width: | 430mm |
| Height of cut: | 25-75mm |
| Collection bag volume: | 45L |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106201601010 | / | / | / | / | / |
| 106201602210 | PH20401x2pc | 1pc | / | / | / |
| | | | | | |
| | | | | | |

## PLM20H-510A 20V CORDLESS LAWN MOWER



| | |
|---|---|
| Voltage: | DC 20V+20V |
| No-load Speed: | 2700/3200 r/min |
| Width Of Cut: | 510mm |
| Height Of Cut: | 30-100mm |
| Grass Collection Capacity: | 60L |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106201701010 | / | / | / | / | / |
| 106201702210 | PH20401x2pc | 1pc | / | / | / |
| | | | | | |
| | | | | | |



## PDJ20H-300A 20V CORDLESS PRUNING SHEARS



| | |
|---|---|
| Voltage: | DC 20V |
| No-load Speed: | 60spm |
| Collet chuck size: | Ø0-25mm(0-1") |
| | |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 102000101010 | / | / | 60x32.5x18.5cm | 10pcs/CTN | 12/13kg |
| | | | | | |
| | | | | | |
| | | | | | |

## PKE20H-100A 20V MINI CHAINSAW CORDLESS



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 3500r/min |
| Chain speed: | 4.8m/s |
| Bar length: | 100mm(4") |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106300101010 | / | / | 66.5x37.5x26cm | 10pcs/CTN | 10/11kg |
| | | | | | |
| | | | | | |
| | | | | | |

## PKE20H-405A 20V CORDLESS CHAIN SAW



| | |
|---|---|
| Voltage: | DC 20V+20V |
| No-load Speed : | 11000r/min |
| Bar Length: | 405mm(16") |
| Oil Tank Capacity: | 260ml |
| Chain Speed: | 20m/s |
| Chain Pitch: | 3/8" |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106300401010 | / | / | 49.5×25×48cm | 2pcs/CTN | 9/10kg |
| | | | | | |
| | | | | | |
| | | | | | |

## PKE20H-150B MINI CHAINSAW CORDLESS



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 5400r/min |
| Chain speed: | 8m/s |
| Bar length: | 150mm(6") |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106301601010 | / | / | 44x36x36.5cm | 8pcs/CTN | 10.4/12kg |
| 106301602110 | | | 44x36x36.5cm | 8pcs/CTN | 10.4/12kg |
| | | | | | |
| | | | | | |

## PKE20H-300B 20V CORDLESS BRUSHLESS CHAIN SAW



| | |
|---|---|
| Voltage: | DC 20V |
| No-load speed: | 2600r/min |
| Chain speed: | 8m/s |
| Bar length: | 300mm(12") |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106301601010 | / | / | / | / | / |
| | | | | | |
| | | | | | |
| | | | | | |

## PHE20H-20A 2 IN1 GRASS SHEAR & SHRUB TRIMMER



| | |
|---|---|
| Voltage: | DC 20V |
| Trimming Blade Length: | 200mm |
| Shearing Blade Length: | 120mm |
| Speed: | 1200spm |
| Cutting Capacity: | 8mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106700501010 | / | / | 52x36x30.5cm | 8pcs/CTN | 11/15kg |
| 106700502110 | PH20201x1pc | 1pc | 59x36x30.5cm | 6pcs/CTN | 13/17kg |
| | | | | | |
| | | | | | |

## PHE20H-450A 20V CORDLESS HEDGE TRIMMER



| | |
|---|---|
| Voltage: | DC 20V |
| Blade Length: | 450mm(18") |
| No Load Stroke Rate: | 1100spm |
| | |
| | |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106700101010 | / | / | 93×42×23cm | 4pcs/CTN | 11.5/12.5kg |
| | | | | | |
| | | | | | |
| | | | | | |





12V ONE POWER

# BATTERY

## Driven to Deliver Innovative Cordless Solutions

A battery is used for all tools of P.I.T. 12V platform. From drilling to cutting, from metal processing to carpentry, from gardening to cleaning, and from professional to DIY, you can enjoy wireless freedom outdoors, in the studio, in the workshop or at home.

## PORTABLE & AFFORDABLE

The battery is compatible with the entire 12V platform series of products. At the time of purchase, you can choose to buy tools without batteries. You can buy more products at a lower cost without having to pay for unnecessary batteries and chargers.
Based on existing platform, we never intend to stop moving forward. We will continue to add a variety of innovative and practical tools to our platform product line, because our target is to help you complete your work faster and easier.

**P0009-02** — **12V TOOL KIT**



| | |
|---|---|
| Voltage: | DC 12V |
| Chuck Capacity: | 0-450/0-1500r/min |
| No-load Speed: | 35N-m |
| Max. Torque: | Ø10mm (3/8") |
| Torque Setting: | 20+1 |
| Bar Length: | 100mm (4") |
| Chain Speed: | 5.0m/s |
| No-load Speed: | 3100r/min |
| Chain Pitch: | 1/4" |

12V ONE POWER

| Product No. | Battery Pack | Data Cable | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 108700801210 | PK12-2.0x2pcs | 1pc | 45x36.5x32.5cm | 3pcs/CTN | 13/14Kg |
| | | | | | |
| | | | | | |

**PBM12K-10C** — **12V CORDLESS DRILL**



| | |
|---|---|
| Voltage: | DC 12V |
| No-load Speed: | 0-450/0-1500r/min |
| Max. Torque: | 50N-m |
| Chuck Capacity: | Ø10mm (3/8") |
| Torque Setting: | 20+1 |

BL MOTOR 12V ONE POWER

| Product No. | Battery Pack | Data Cable | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101301203010 | / | / | / | / | / |
| 101301204010 | | | / | / | / |
| | | | | | |

## PSD12K-120A 12V CORDLESS IMPACT DRIVER



| | |
|---|---|
| Voltage: | DC 12V |
| No-load speed: | 0-1100/2200/3300 r/min |
| Torque,max.: | 120N·m (1062 in-lbf) |
| Impact Rate: | 0-4300ipm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101800101010 | / | / | 35.2x33x20cm | 10pcs/CTN | 9/9.5kg |
| 101800102110 | PK12-2.0x1pc | 1pc | 54x27.2x24.5cm | 8pcs/CTN | 11.5/12kg |
| 101800103210 | PK12-2.0x2pcs | 1pc | 54.2x32x26.5cm | 5pcs/CTN | 11/12kg |

## PRW12K-45A 12V CORDLESS RATCHET WRENCH



| | |
|---|---|
| Voltage: | DC 12V |
| No-load Speed: | 0-250r/min |
| Max Torque: | 45N·m |
| Output Shaft Size: | 3/8"(9.52mm) |

| Product No. | Battery Pack | Data Cable | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101700103010 | / | / | 36x29x17cm | 12pcs/CTN | 12/13kg |
| 101700102210 | PH12202x2pcs | 1pc | 49.5x31x26.5cm | 6pcs/CTN | 6/7kg |

## PMG12K-024A 12V CORDLESS ROTARY TOOL



| | |
|---|---|
| Voltage: | DC 12V |
| Specification: | Ø3.2mm(1/8") |
| Speed: | 5000-25000r/min |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101200101010 | / | / | 35.7x35x33cm | 15pcs/CTN | 9.5/10kg |
| 101200103210 | PK12-2.0x2pcs | 1pc | 64.5x41.2x32.2cm | 5pcs/CTN | 16/17kg |

## PWS12K-76A 12V CORDLESS ANGLE GRINDER



| | |
|---|---|
| Voltage: | DC 12V |
| Speed: | 17500r/min |
| Wheel Diameter: | Ø76mm |
| Thread Size: | M5 |
| Cutting Depth: | 15mm |

| Product No. | Battery Pack | Data Cable | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 1000300102110 | PH12202x1pc | 1pc | 44.5x26.6x35cm | 10pcs/CTN | 14/15kg |
| 1000300103210 | PH12202x2pcs | 1pc | 44.5x26.6x35cm | 10pcs/CTN | 16/17kg |

## PWL12K-5A 12V RECHARGEABLE WORK LIGHT



| | |
|---|---|
| Voltage: | DC 12V |
| Power: | 5/2.5W |
| Luminous Flux: | 350/175lm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 107800101010 | / | / | 34x32x29cm | 40pcs/CTN | 8.4/9.3kg |

## PKE12K-100A MINI CHAINSAW CORDLESS



| | |
|---|---|
| Voltage: | DC 12V |
| Bar Length: | 100mm (4") |
| Chain Speed: | 5.0m/s |
| No-load Speed: | 3100r/min |
| Chain Pitch: | 1/4" |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106301401010 | / | / | 39x34.5x42.5cm | 8pcs/CTN | 13/14kg |
| 106301403210 | PK12-2.0x2pcs | 1pc | 39x33x27cm | 4pcs/CTN | 8.5/10kg |

## PHE12K-20A 2 IN 1 GRASS SHEAR & SHRUB TRIMMER



| | |
|---|---|
| Voltage: | DC 12V |
| Trimming Blade Length: | 180 mm |
| Shearing Blade Length: | 100 mm |
| Speed: | 1200 spm |
| Cutting Capacity: | 8 mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 106700401010 | / | / | 52x33.5x27cm | 8pcs/CTN | 9/13kg |
| 106700402110 | PK12-2.0x1pcs | / | 52x33.5x27cm | 8pcs/CTN | 11/15kg |

## PHE12K-20A/1 EXTENSION POLE



| | |
|---|---|
| Voltage: | DC 12V |
| Adjustable Length: | 1200mm-1850mm |

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 206400101000 | / | / | 123.5x24.2x22cm | 12pcs/CTN | 11/11.5kg |






## PEC3.6P-7A CORDLESS GLUE GUN




| | |
|---|---|
| Voltage: | DC 3.6V |
| Capacity: | Ø7mm |
| Productivity, | 120-150g/min |
| Max.temperature: | 170℃ |

Li-Ion powered by technology

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 104100401010 | 47.5x34.5x36.6cm | 40pcs/CTN | 13/14kg |

## PBM10-C ELECTRIC DRILL




| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 550W |
| Chuck Capacity: | Ø10mm(3/8") |
| No-load Speed: | 0-3300r/min |

550W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101300401010 | 51.5x37x26cm | 10pcs/CTN | 15.5/16.5kg |

## PBM10-C3 ELECTRIC DRILL




| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 400W |
| No-load Speed: | 0-550/0-1850r/min |
| Max. Torque: | 35N·m(309 in-lbf) |
| Torque Setting: | 18+1 |

400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101300901010 | 52x38.5x26cm | 10pcs/CTN | 18/18.5kg |

## PBM10-C4 ELECTRIC DRILL SCREWDRIVER




| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Power : | 400W |
| Chuck diameter : | Ø10mm(3/8") |
| Max.Torque : | 25N·m(195in-lbf) |
| No-load speed : | 0-1000r/min |

400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101301001010 | 52x38.5x30cm | 10pcs/CTN | 18.5/19.5kg |

## PSB13-C2 ELECTRIC IMPACT DRILL




| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 780W |
| Chuck Capacity: | Ø13mm(1/2") |
| No-load Speed: | 0-3000r/min |
| Impact Rate: | 0-48000ipm |

780W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101400501010 | 38.5x31.5x29.5cm | 5pcs/CTN | 10.5/11.5kg |

## PSB13-C6 ELECTRIC IMPACT DRILL




| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 650W |
| Chuck Capacity: | Ø13mm(1/2") |
| No-load Speed: | 0-3000r/min |
| Impact Rate: | 0-48000ipm |

650W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101400601010 | 39x30.5x26.5cm | 5pcs/CTN | 9.5/10.5kg |

## PD03P3.6-006 3.6V CORDLESS SCREWDRIVER




| | |
|---|---|
| Voltage: | DC 3.6V |
| Battery Capacity: | 1300mAh |
| No-load Speed: | 180r/min |
| Torque: | 3.5N·m(31 in-lbf) |

Li-Ion powered by technology

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101800401010 | / | / | 40x31x40.5cm | 20pcs/CTN | 12.5/13.5kg |

## PES3.6P-24A 3.6V CORDLESS SCREWDRIVER




| | |
|---|---|
| Voltage: | DC 3.6V |
| Battery Capacity: | 1300mAh |
| No-load Speed: | 180r/min |
| Torque: | 2N·m(18 in-lbf) |

Li-Ion powered by technology

| Product No. | Battery Pack | Charger | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|---|---|
| 101800501010 | / | / | 46.5x25x22cm | 20pcs/CTN | 9/10kg |

## PSB13-C8 ELECTRIC IMPACT DRILL




| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 950W |
| Chuck Capacity: | Ø13mm(1/2") |
| No-load Speed: | 0-3000r/min |
| Impact Rate: | 0-48000ipm |

950W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101400801010 | 42x33.5x28.5cm | 5pcs/CTN | 12.5/13.5kg |

## PIW1100-C ELECTRIC IMPACT WRENCH




| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1100W |
| No-load Speed: | 2200r/min |
| Torque: | 450N·m |
| Accessory Connection Type: | 1/2" |

1100W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101600501010 | 60x38.5x29cm | 5pcs/CTN | 25/26kg |




## PWS115-C1 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 800W |
| No-load Speed: | 11000r/min |
| Wheel Diameter: | Ø115mm(4-1/2") |
| Spindle Thread: | M14 |

800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100300601010 | 34.5x34x24cm | 6pcs/CTN | 12/13kg |

## PWS125-C ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1400W |
| No-load Speed: | 4500-11000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle Thread: | M14 |

1400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100304201010 | 34.5x34x25cm | 6pcs/CTN | 13/14kg |

## PWS125-C8 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 800W |
| No-load Speed: | 11000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle Thread: | M14 |

800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100301101010 | 34.5x34x24cm | 6pcs/CTN | 12/13kg |

## PWS125-C9 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 850W |
| No-load Speed: | 11000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle Thread: | M14 |

850W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100301201010 | 36.5x34x24cm | 6pcs/CTN | 12.5/13.5kg |

## PWS125-C10 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 950W |
| No-load Speed: | 11000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle Thread: | M14 |

950W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100301301010 | 36.5x32.5x25.5cm | 6pcs/CTN | 12.5/13.5kg |

## PWS125-C11 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 950W |
| No-load Speed: | 3500-11000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle Thread: | M14 |

950W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100301401010 | 36.5x32.5x25.5cm | 6pcs/CTN | 12.5/13.5kg |

## PWS125-C12 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1000W |
| No-load Speed: | 3500-11000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle Thread: | M14 |

1000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100301601010 | 36.5x32.5x25.5cm | 6pcs/CTN | 13/14kg |

## PWS125-C13 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1200W |
| No-load Speed: | 11000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle Thread: | M14 |

1200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100301501010 | 35.5x26x25cm | 4pcs/CTN | 11/11.5kg |

## PWS125-C14 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1400W |
| No-load Speed: | 3000-11000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle Thread: | M14 |

1400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100303801010 | 35.5x26x27cm | 4pcs/CTN | 11.2/11.7kg |

## PWS125-C7 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220V~50Hz |
| Input Power: | 1200W |
| No-load Speed: | 11000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Spindle Thread: | M14 |

1200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100301001010 | 45x20x27cm | 4pcs/CTN | 10/11kg |



## PWS150-C1 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| Input Power: | 1260W |
| No-load Speed: | 3000-9000r/min |
| Wheel Diameter: | Ø150mm(6") |
| Spindle Thread: | M14 |

1260W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100301701010 | 45x20x27cm | 4pcs/CTN | 10.5/11.5kg |

## PWS180-C1 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| Input Power: | 1700W |
| No-load Speed: | 8500r/min |
| Wheel Diameter: | Ø180mm(7") |
| Spindle Thread: | M14 |

1700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100301801010 | 49x23.5x31cm | 4pcs/CTN | 16/17kg |

## PWC135-C ELECTRIC WALL CHASER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| No-load Speed: | 6500r/min |
| Disc Diameter: | Ø135mm |
| Cutting Depth: | 0-38mm |
| Cutting Width: | 5-30mm |

2400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101900401010 | 53x25.5x35.5cm | 2pc/CTN | 16/17kg |

## PWC150-C ELECTRIC WALL CHASER



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| No-load Speed: | 8000r/min |
| Wheel Diameter: | Ø150mm(6") |
| Cutting Width: | 0-35mm |
| Cutting Depth: | 3-35mm |

1700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101900301010 | 49.5x34x18.5cm | 2pcs/CTN | 10.5/11.5kg |

## PWS230-C3 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| Input Power: | 2400W |
| No-load Speed: | 6500r/min |
| Wheel Diameter: | Ø230mm(9") |
| Spindle Thread: | M14 |

2400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100302001010 | 55x26.5x19cm | 2pcs/CTN | 10/11kg |

## PWS230-C4 ANGLE GRINDER



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| Input Power: | 2500W |
| No-load Speed: | 6500r/min |
| Wheel Diameter: | Ø230mm(9") |
| Spindle Thread: | M14 |

2500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100302101010 | 55x26x17.5cm | 2pcs/CTN | 10.5/11.5kg |

## PWG180-C DRYWALL SANDER



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| Input Power: | 810W |
| No-load Speed: | 900-2100r/min |
| Wheel Diameter: | Ø180mm(7") |

810W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100500201010 | 49.5x34x55cm | 4pcs/CTN | 16.5/17.5kg |

## PWG230-C DRYWALL SANDER



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| Input Power: | 900W |
| No-load Speed: | 900-2100r/min |
| Wheel Diameter: | Ø225mm(8-7/8") |

900W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100500301010 | 78x31x44cm | 2pcs/CTN | 14.5/15.5kg |

## PPO180-C1 POLISHER



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| Input Power: | 1400W |
| No-load Speed: | 600-3500r/min |
| Wheel Diameter: | Ø180mm(7") |
| Spindle Thread: | M14 |

1400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100400401010 | 47x29x34cm | 4pcs/CTN | 14.5/15.5kg |

## PWC125-C ELECTRIC WALL CHASER



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| No-load Speed: | 9000r/min |
| Wheel Diameter: | Ø125mm(5") |
| Cutting Width: | 0-30mm |
| Cutting Depth: | 3-30mm |

1400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101900201010 | 48x32x17.5cm | 2pcs/CTN | 8.5/9.5kg |

## PWP120-C BURNISHING POLISHER



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| Input Power: | 1400W |
| No-load Speed: | 700-4200r/min |
| Specifications: | Ø120x100mm(4-3/4"x4") |

1400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100600101010 | 48x41x15cm | 2pcs/CTN | 8.5/9.5kg |



## PBH24-C3 SDS-PLUS HAMMER DRILL



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| No-load Speed: | 0-900r/min |
| MAX.Drilling Diameter: | Ø24mm(15/16") |
| Impact Rate: | 0-4850ipm |
| Impact Energy: | 2.8J |

620W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100100801010 | 41x39x27cm | 4pcs/CTN | 14/15kg |
| 100100802010 | 45x36x29.5cm | 3pcs/CTN | 14.5/15.5kg |

## PBH26-C8 SDS-PLUS HAMMER DRILL



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| No Load Speed: | 0-1300r/min |
| Impact Frequency: | 0-4800ipm |
| Max. Drilling Diameter: | Ø26mm(1") |
| Impact force: | 3.2J |

PROFESSIONAL 800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100101201010 | 44.5x36.5x29.5cm | 3pcs/CTN | 14/15kg |

## PBH26-C7 SDS-PLUS ROTARY HAMMER DRILL



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Impact Rate: | 4250ipm |
| Impact Energy: | 4J |
| Speed: | 865r/min |
| Specification: | Ø26mm (1") |

PROFESSIONAL 1010W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100101701010 | 52.5x41.5x31.5cm | 4pcs/CTN | 26.3/27.3kg |

## PBH28-C6 SDS-PLUS ROTARY HAMMER DRILL



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Impact Rate: | 4200ipm |
| Impact Energy: | 4.8J |
| Speed: | 850r/min |
| Specification: | Ø28mm (1-1/8") |

PROFESSIONAL 1300W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100101901010 | 51.5x29.5x37.8cm | 2pcs/CTN | 16/17kg |

## PBH32-C6 SDS-PLUS HAMMER DRILL



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Impact Rate: | 4250ipm |
| Impact Energy: | 6J |
| Speed: | 920r/min |
| Specification: | Ø32mm (1-1/4") |

PROFESSIONAL 1500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100102201010 | 44.5x29.5x34.7cm | 2pcs/CTN | 16/17kg |

## PBH40-C3 SDS-MAX ROTARY HAMMER DRILL



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Impact Rate: | 3800ipm |
| Impact Energy: | 10J |
| Speed: | 630r/min |
| Specification: | Ø42mm (1-5/8") |

PROFESSIONAL 1600W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100102401010 | 54x32.5x37.3cm | 2pcs/CTN | 21.8/22.8kg |

## GSH25-C2 ELECTRIC DEMOLITION HAMMER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Input Power: | 1300W |
| Impact Rate: | 4100ipm |
| Impact Energy: | 15J |
| Chuck Type: | SDS-MAX |

PROFESSIONAL 1300W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100200301010 | 51.5x29.5x37.8cm | 2pcs/CTN | 17.4/18.4kg |

## GSH65-C4 HEX SHANK DEMOLITION BREAKER HAMMER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1700W |
| Impact Rate: | 1850ipm |
| Impact Energy: | 42J |
| Chuck Type: | HEX-GAN(30) |

PROFESSIONAL 1700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100200601010 | 71x17x29cm | 1pcs/CTN | 19.5/20.5kg |

## GSH65-C5 HEX SHANK DEMOLITION BREAKER HAMMER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1800W |
| Impact Rate: | 1850ipm |
| Impact Energy: | 50J |
| Chuck Type: | HEX-GAN(30) |

1800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100200701010 | 71x17x29cm | 1pcs/CTN | 15.5/22.5kg |

## GSH65-C7 HEX SHANK DEMOLITION BREAKER HAMMER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Power: | 1700W |
| Impact frequency: | 2100ipm |
| Impact energy: | 45J |
| Chuck Type: | SDS-MAX |

1700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100200901010 | 69.3x17.9x38.2cm | 1pc/CTN | 12/17.4kg |

## GSH65-C8 HEX SHANK DEMOLITION BREAKER HAMMER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1700W |
| Impact Rate: | 2000ipm |
| Impact Energy: | 60J |
| Chuck Type: | HEX-GAN(30) |

1700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100201001010 | 79.2x20.5x37.3cm | 1pc/CTN | 14.6/22.6kg |

## GSH65-C9 HEX SHANK DEMOLITION BREAKER HAMMER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1700W |
| Impact Rate: | 2000ipm |
| Impact Energy: | 65J |
| Chuck Type: | HEX-GAN(30) |

1700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100201101010 | 79.2x20.5x37.3cm | 1pc/CTN | 16.2/24.7kg |

## GSH90-C3 HEX SHANK DEMOLITION BREAKER HAMMER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 1700W |
| Impact Rate: | 2000ipm |
| Impact Energy: | 75J |
| Chuck Type: | HEX-GAN(30) |

1700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100201301010 | 79.2x20.5x37.3cm | 1pc/CTN | 16.2/24.2kg |

## P31035 HAND HELD CONCRETE VIBRATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 5000r/min |
| Specification: | Ø35mmx1.5m |

1100W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103500401010 | 47x34x18.5cm | 5pcs/CTN | 12.5/13.5kg |

## AMAS16-01535 CONCRETE VIBRATOR ROD



| | |
|---|---|
| Vibration Rod Size: | Ø35mm×1.5m(1-3/8"×4.92ft) |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 206200201000 | 10x10x150cm | 10pcs/CTN | 37/38.5kg |

## AMAS16-06035 VIBRATOR FLEX SHAFT



| | |
|---|---|
| Vibration Rod Size: | Ø35mm×6m(1-3/8"×19.68ft) |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 206200401000 | 50x50x20cm | 2pcs/CTN | 22.5/23kg |

## PMV50-C CONCRETE VIBRATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 2800r/min |
| Specification: | Ø35mmx4m |

1500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103500201010 | 37.5x19x28cm | 1pc/CTN | 9/10kg |

## AMAS16-0435 VIBRATOR FLEX SHAFT



| | |
|---|---|
| Vibration Rod Size: | Ø35mm×4m(1-3/8"×13.12ft) |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 206200101000 | 72x65x10.5cm | 2pcs/CTN | 15.5/16.5kg |

## PCP91-G CEMENT PUSHING MACHINE



| | |
|---|---|
| Power: | 4000W |
| Engine Displacement: | 163CC |
| Diameter of the turntable: | Ø91cm |
| Rotational speed: | 60-165r/min |

4000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107500101010 | 100x100x76cm | 1pc/CTN | 90/110kg |

## PKS115-C MARBLE CUTTING MACHINE



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| Power: | 1400W |
| Rotating speed: | 13000r/min |
| Saw blade diameter: | 115mm(4-1/2") |
| Cutting depth: | 0-33mm |

1400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102300101010 | 46x24.5x38cm | 4pcs/CTN | 14/15kg |

## PDP16-C BENCH DRILL



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Power: | 550W |
| Max. diameter: | Ø16mm(5/8") |
| Rated speed: | 300-2550r/min |
| Speed: | 12 |

550W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 108800101010 | 66.5x41x26cm | 1pc/CTN | 24.5/26.5kg |






## PKS185-C3 CIRCULAR SAW



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| No-load Stroke: | 5500r/min |
| Blade Diameter: | Ø185mm(7-1/4") |
| Cutting Depth (90°/45°): | 64mm /44mm |

1400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102500401010 | 52×34×41cm | 4pcs/CTN | 19/20kg |

## PKS185-C4 CIRCULAR SAW



| | |
|---|---|
| Voltage/Frequency: | 220V~/50Hz |
| No-load Stroke: | 5500r/min |
| Blade Diameter: | Ø185mm(7-1/4") |
| Cutting Depth (90°/45°): | 61mm /47mm |

1200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102500501010 | 45x34.5x41cm | 4pcs/CTN | 16.5/17.5kg |

## PKS210-C CIRCULAR SAW



| | |
|---|---|
| Voltage/frequency: | 220V~/50Hz |
| Specification: | Ø210mm(8-1/4") |
| Speed: | 5100r/min |

2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102500701010 | 66.5x43x22cm | 2pcs/CTN | 16/17kg |

## PKS235-C CIRCULAR SAW



| | |
|---|---|
| Voltage/frequency: | 220V~/50Hz |
| Specification: | Ø235mm(9-1/4") |
| Speed: | 4500r/min |

2200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102500801010 | 63.5x43x21cm | 2pcs/CTN | 18.5/19kg |

## PST70-C2 JIGSAW ELECTRIC



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Rated power: | 700W |
| Stroke per minute: | 1000-3000spm |
| Cutting depth(Wood): | 70mm(2-3/4") |
| Stroke length: | 18mm |

700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102400401010 | 44.5x29.8x23.5cm | 5pcs/CTN | 11.6/12.6kg |

## PST90-C2 JIGSAW ELECTRIC



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Rated power: | 900W |
| Stroke per minute: | 1000-3200spm |
| Cutting depth(Wood): | 100mm(4") |
| Stroke length: | 20mm |

900W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102400601010 | 44.5x30.5x23.5cm | 5pcs/CTN | 13.5/14kg |

## PSA115-C1 RECIPROCATING SAW



| | |
|---|---|
| Voltage/frequency: | 220V~/50Hz |
| Speed: | 0-2800spm |
| Saw Blade Stroke: | 20mm(1-1/8") |

1000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102600201010 | 50x36x20.5cm | 4pcs/CTN | 10.5/11.5kg |

## PSA1200-C1 RECIPROCATING SAW



| | |
|---|---|
| Voltage/frequency: | 220V~/50Hz |
| Speed: | 0-2900spm |
| Saw Blade Stroke: | 29mm(1-1/8") |

1200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102600301010 | 53x40x20cm | 4pcs/CTN | 13.5/14.5kg |

## PST110-C JIGSAW ELECTRIC



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Input Power: | 750W |
| No-load Stroke: | 1000-3100spm |
| Cutting depth(Wood): | 110mm(4-5/16") |
| Stroke length: | 26mm |

750W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102400701010 | 45.5×38.5×24cm | 5pcs/CTN | 17/18.5kg |

## PST135-C JIGSAW ELECTRIC



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Rated power: | 750W |
| Stroke per minute: | 1000-3000spm |
| Cutting depth(Wood): | 135mm(5-5/16") |
| Stroke length: | 26mm |

750W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102400801010 | 36.5x31.2x24cm | 4pcs/CTN | 12.5/13kg |

## PTC180-C TABLE SAW



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| No-load Speed: | 2950r/min |
| Blade Diameter: | Ø180mm(7") |
| Table Size: | 360mm(14-3/16")×330mm(13") |

650W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102900101010 | 37x34x19cm | 1pc/CTN | 7.5/8.5kg |

## PTS200-C TABLE SAW



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| No-load Speed: | 2950r/min |
| Blade Diameter: | Ø200mm(8") |
| Table Size: | 500mm(19-11/16")×335mm(13-3/16") |

850W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103000101010 | 51.5x34.5x26cm | 1pc/CTN | 10/11kg |




## PBS75-C1 BELT SANDER



| | |
|---|---|
| Voltage/frequency: | 220V~,50Hz |
| Specification: | 533x76mm(21"x3") |
| Speed: | 200~380m/min |

900W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100700301010 | 38x36x38.5cm | 4pcs/CTN | 14/15kg |

## PDS125-C RANDOM ORBITAL SANDER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| No-load speed: | 6000-12000r/min |
| Sanding Pad Diameter: | Ø125mm(5") |
| Eccentricity: | 2mm |

500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100800201010 | 51.5x31.5x40cm | 8pcs/CTN | 17.5/18.5kg |

## PDS150-C RANDOM ORBITAL SANDER



| | |
|---|---|
| Voltage/frequency: | 220V~,50Hz |
| No-load speed: | 6000-12000r/min |
| Sanding Pad Diameter: | Ø150mm(6") |
| Eccentricity: | 2mm |

500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100800401010 | 62x31x41cm | 8pcs/CTN | 17.5/18.5kg |

## PSP300-C SHEET SANDER



| | |
|---|---|
| Voltage/frequency: | 220V~,50Hz |
| Specification: | 187×90mm (3-5/8" x 7-3/8") |
| Speed: | 6000~11000r/min |
| Eccentricity: | 1.6mm |

300W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100900401010 | 46x34x38.5cm | 8pcs/CTN | 16/17kg |

## PEP82-C ELECTRIC PLANER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| No-load speed: | 16800r/min |
| Max. Cutting Width: | 82mm(3-1/4") |
| Max. Cutting Depth: | 2mm(5/64") |

650W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102700201010 | 50.5x32.5x37.5cm | 6pcs/CTN | 18/19kg |

## PEP82-C1 ELECTRIC PLANER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| No-load speed: | 16000r/min |
| Max. Cutting Width: | 82mm(3-1/4") |
| Max. Cutting Depth: | 3mm(1/8") |

PROFESSIONAL 900W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102700301010 | 35.5x35x45.5cm | 4pcs/CTN | 15.5/16kg |

## PEP110-C ELECTRIC PLANER



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| No-load speed: | 15000r/min |
| Planing width: | 110mm(4-5/16") |
| Max.Planing depth: | 3.5mm(1/8") |

PROFESSIONAL 1500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102700401010 | 39.5x38.8x42cm | 4pcs/CTN | 21/22kg |

## PEP110-C1 ELECTRIC PLANER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| No-load speed: | 15000r/min |
| Planing width: | 110mm(4-5/16") |
| Max.Planing depth: | 3.5mm(1/8") |

PROFESSIONAL 1500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102700501010 | 43.5x39.5x26.2cm | 2pcs/CTN | 13.5/14.5kg |

## PSP400-C1 SHEET SANDER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Specification: | 115x230mm(4-1/2"x9") |
| Speed: | 6000~11000r/min |
| Eccentricity: | 2.5mm |

400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100900501010 | 41x36.5x41cm | 6pcs/CTN | 16/17kg |

## PER8-C1 ELECTRIC ROUTER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Specification: | Ø8mm (5/16") |
| Speed: | 16000~30000r/min |

1200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102800701010 | 56x29.5x28cm | 4pcs/CTN | 16.2/16.8kg |

## PER12-C1 ELECTRIC ROUTER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Specification: | 12mm(1/2") |
| Speed: | 6000~22000r/min |

PROFESSIONAL 2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102800801010 | 33.7x30.5x33cm | 2pcs/CTN | 10.2/10.8kg |

## PDJ250-C SCISSOR FOR METAL



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 2600/min |
| Collet Chuck Size: | Ø2.5mm(1/8") |

500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102000201010 | 33.5×33.5×37cm | 8pcs/CTN | 20.5/21.5kg |




## PCM255-C3 MITER SAW



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Speed: | 3200/4500r/min |
| Specification: | Ø255mm(10") |

PROFESSIONAL 2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103200701010 | 81.5x48x40.5cm | 1pc/CTN | 16/17.5kg |

## PCM355-C ABRASIVE CUT-OFF SAW



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Specification: | Ø355mm(14") |
| Speed: | 3800r/min |

2400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103300101010 | 53.5x29x39.5cm | 1pc/CTN | 12/13.5kg |

## PCM355-C1 ABRASIVE CUT-OFF SAW



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Specification: | Ø355mm(14") |
| Speed: | 3800r/min |

PROFESSIONAL 2500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103300201010 | 57x31x42cm | 1pc/CTN | 16/17.5kg |

## PCM355-C3 CUT-OFF MACHINE



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Specification: | Ø355mm(14") |
| No-Load Speed: | 1300r/min |
| Blade Diameter: | Ø355mm(14") |

PROFESSIONAL 2400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103300401010 | 58x36x44.5cm | 1pc/CTN | 20/21.5kg |

## PDJ300-C WOOL SHEARS



| | |
|---|---|
| Voltage/frequency: | 220V~,50Hz |
| No Load Speed: | 0-2600r/min |
| Blade width: | 78mm |

500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102000301010 | 54×44.5×22cm | 5pcs/CTN | 14/15kg |

## PDJ300-C1 WOOL SHEARS



| | |
|---|---|
| Voltage/frequency: | 220V~,50Hz |
| No Load Speed: | 0-2600r/min |
| Blade width: | 78mm |

800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102000401010 | 54×46×22.5cm | 5pcs/CTN | 14/15kg |

## PMS210-C MITER SAW



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Speed: | 0~4900r/min |
| Specification: | Ø210mm(8-1/4") |

1400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103200301010 | 53x34x30.5cm | 1pc/CTN | 7/8.5kg |

## PCM210-C MITER SAW



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Speed: | 3500/4900r/min |
| Specification: | Ø210mm(8-1/4") |

PROFESSIONAL 1700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103200401010 | 83x48.5x29cm | 1pc/CTN | 10/12.5kg |

## PMT350-C1 OSCILLATING MULTI TOOL



| | |
|---|---|
| Voltage/frequency: | 220V~,50Hz |
| Speed: | 15000~22000opm |
| Oscillation Angle: | 3.5° |

300W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 102100301010 | 35×34×20.5cm | 6pcs/CTN | 9.5/10kg |

## PHG2000-D HEAT GUN



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Temperature: | 350°C~600°C |
| Air Flow: | 300/500L/min |

2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103700201010 | 40x25x48cm | 10pcs/CTN | 9/10kg |

## PHG2000-C HEAT GUN



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Temperature: | 50°C~600°C |
| Air Flow: | 300～500L/min |

PROFESSIONAL 2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103700301010 | 58.5x37x30cm | 5pcs/CTN | 10.5/11.5kg |

## PHG2001-C HEAT GUN



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Temperature: | 50°C~650°C |
| Air Flow: | 250~500L/min |

PROFESSIONAL 2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103700401010 | 58.5x37x30cm | 5pcs/CTN | 10.5/11.5kg |

## PEC20-D HOT MELT GLUE GUN



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Specification: | 7mm (1/4") |

20W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 104100501010 | 44x31.6x77.7cm | 96pcs/CTN | 15/16.5kg |

## PEC100-C HOT MELT GLUE GUN



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Specification: | 11mm (7/16") |

100W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 104100601010 | 59x46x40cm | 48pcs/CTN | 13.2/15kg |

## PST6001-CV ELECTRIC BRAD NAILER



| | |
|---|---|
| Current: | 9A |
| Number Of Staples: | 100 |
| Staple Size : | S:15-32mm，W:2.0mm |
| | U:15-25mm，W:5.7mm |

PROFESSIONAL 9A Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103800301010 | 44x35x34.5cm | 5pcs/CTN | 14/15kg |

## PMG6-C DIE GRINDER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Specification: | Ø6mm |
| Speed: | 10000-30000r/min |

710W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101200401010 | / | / | / |

## PMG350-C ENGRAVER



| | |
|---|---|
| No-load Speed: | 6000–17000 r/min |
| Maximum Disc Diameter: | Ø50 mm (1-31/32") |
| Maximum Size of Chuck | 3.2 mm |

PROFESSIONAL 350W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 100500401010 | 44.5x44x39.5cm | 6pcs/CTN | 15.5/16kg |




## PMG200-C1 ENGRAVER TOOL KIT



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Specification: | 3.2mm(1/8") |
| Speed: | 10000~33000 r/min |

150W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101200301010 | 60x40.5x38cm | 5pcs/CTN | 17.5/18.5kg |

## PMG150-C ENGRAVER TOOL KIT



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Specification: | 3.2mm(1/8") |
| Speed: | 10000~33000r/min |

150W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101200201010 | 35x35x30.5cm | 5pcs/CTN | 9.5/10.5kg |

## PBG125-C2 BENCH GRINDER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Specification: | 125mm(5") |
| No-Load Speed: | 2950/3500r/min |

200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101000301010 | 60.5x39x23.5cm | 4pcs/CTN | 19.5/20.5kg |

## PBG125-C3 BENCH GRINDER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Specification: | 125mm(5") |
| No-Load Speed: | 2950/3500r/min |

200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101000401010 | 60x38x23cm | 4pcs/CTN | 18.5/19.5kg |

## PBG150-C2 BENCH GRINDER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Specification: | 150mm(6") |
| No-Load Speed: | 2950/3500r/min |

300W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101000601010 | 43x37x27cm | 2pcs/CTN | 14.5/15kg |

## PBG150-C3 BENCH GRINDER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Specification: | 150mm(6") |
| No-Load Speed: | 2950/3500r/min |

300W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101000701010 | 43x37x27cm | 2pcs/CTN | 13.5/14.5kg |

## PBG200-C2 BENCH GRINDER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Specification: | 200mm(8") |
| No-Load Speed: | 2950/3500r/min |

500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101000901010 | 55x39x30cm | 2pcs/CTN | 20/20.5kg |

## PBG200-C3 BENCH GRINDER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Specification: | 200mm(8") |
| No-Load Speed: | 2950/3500r/min |

500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101001001010 | 55x39x30cm | 2pcs/CTN | 18.5/19kg |

## PCSS1001-C SAW CHAIN SHARPENER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Specification: | Ø108x23.2x3.2mm |
| Speed: | 5500r/min |

85W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101100101010 | 53x46x19cm | 4pcs/CTN | 9.5/10.5kg |

## PCSS1002-C SAW CHAIN SHARPENER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Specification: | Ø100x10x3.2mm |
| Speed: | 7500r/min |

220W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101100201010 | 56.5x28x41.5cm | 6pcs/CTN | 12/13kg |

## PMTS1003-C ELECTRIC MULTIPURPOSE SHARPENER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Max.grinding For Drill: | Ø3-13 mm(1/8"-1/2") |
| Speed: | 6700r/min |
| | |
| | |

65W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101100301010 | 44x42x16.5cm | 4pcs/CTN | 6/7kg |

## PEC60-C ELECTRIC SOLDERING IRON



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Temperature: | 200-480℃ |
| | |
| | |
| | |

60W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 104800201010 | 51x27x43cm | 16pcs/CTN | 13/13.7kg |

## PSG800-C ELECTRIC PAINT SPRAYER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Flow Rate: | 1000ml/min |
| Kettle capacity: | 800ml |
| | |
| | |

400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103901201010 | / | / | / |

## PSG1500-C ELECTRIC PAINT SPRAYER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Flow Rate: | 1000ml/min |
| Kettle capacity: | 1500ml |
| | |
| | |

550W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103901301010 | / | / | / |

## PHM120-C ELECTRIC MIXER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| No-Load Speed: | 0-550r/min |
| Mixer Diameter: | Ø120mm(5") |
| Thread Size: | M14 |
| | |

1050W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103400201010 | 56x38x30cm | 4pcs/CTN | 21.5/22.5kg |

## PHM150-C ELECTRIC MIXER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| No-Load Speed: | Ⅰ:0-500 r/min |
| | Ⅱ:0-700 r/min |
| Mixer Diameter: | Ø150 mm (6") |
| | |

1500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103400301010 | 39x33x51cm | 2pcs/CTN | 11/12kg |

## PSG800-C1 ELECTRIC SPRAY GUN



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Flow Rate: | 1000ml/min |
| Kettle capacity: | 800ml |
| | |
| | |

650W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103901401010 | 62x53x30.5cm | 4pcs/CTN | 13/14kg |

## PWM32-D PLASTIC WELDING MACHINE



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Temperature: | 0~300°C |
| Specification: | Ø20-32mm(3/4"~1-1/4") |
| | |
| | |

800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 104700101010 | 46x35x36cm | 10pcs/CTN | 15/16kg |

## PHM250-C ELECTRIC MIXER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| No-Load Speed: | 0-600/0-800r/min |
| Mixer Diameter: | Ø250 mm (10") |
| Thread Size: | M14 |
| | |

PROFESSIONAL 1600W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103400401010 | 59x32.5x25cm | 1pc/CTN | 8/8.5kg |

## PSG3020-C ELECTRIC PAINT SPRAYER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Flow Rate: | 700ml/min |
| Specification: | Ø2.5mm |
| Kettle capacity: | 800ml |
| | |

550W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103900201010 | 47.5x28.5x25.2cm | 4pcs/CTN | 6.5/7.5kg |

## PWM43-C1 PLASTIC WELDING MACHINE



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Temperature: | 0-300°C |
| Specification: | Ø20~40mm(3/4"~1-1/2") |
| | |
| | |

1200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 104700201010 | 41.5x20.5x45.5cm | 5pcs/CTN | 10.5/11kg |

## PWM63-C PLASTIC WELDING MACHINE



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Temperature: | 0-300°C |
| Specification: | Ø20~63mm(3/4"~2-1/2") |
| | |
| | |

2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 104700301010 | 46x31.5x30cm | 3pcs/CTN | 14/15kg |

## PSG3021-C ELECTRIC PAINT SPRAYER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Flow Rate: | 800ml/min |
| Specification: | Ø2.0/2.5/3.0mm |
| Kettle capacity: | 900ml |
| | |

500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103900301010 | 57x28.5x28cm | 4pcs/CTN | 7.5/8kg |

## PSG3022-C ELECTRIC PAINT SPRAYER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Flow Rate: | 1000ml/min |
| Specification: | Ø2.0/2.5/3.0mm |
| Kettle capacity: | 900ml |
| | |

600W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103900401010 | 62x53x30.5cm | 4pcs/CTN | 13/14kg |

## PHA2.0-C HEATER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Flow Rate: | 210m³/h |
| Heatable Area: | 15~20m² |
| | |
| | |

2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 108100101010 | 56x39x30.5cm | 4pcs/CTN | 8.5/10.5kg |

## PHA3.0-C HEATER



| | |
|---|---|
| Voltage/frequency: | 220V-240V～50Hz/60Hz |
| Flow Rate: | 240m³/h |
| Heatable Area: | 20~30m² |
| | |
| | |

3000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 108100201010 | 59.5x44x32.5cm | 4pcs/CTN | 10.5/13kg |






## PMI140-C2 — MANUAL WELDER



| | |
|---|---|
| Voltage/frequency: | 230V±15~/50~60 Hz |
| Output Current (A): | 10–140A |
| No-load Voltage (V): | 62 |
| Duty Cycle (%): | 25℃/60% |
| Electrode Diameter (mm): | 1.6–3.2mm |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| / | / | / | / |

## PMI160-C — MANUAL WELDER



| | |
|---|---|
| Voltage/frequency: | 230V±15~/50~60 Hz |
| Output Current (A): | 10-160A |
| No-load Voltage (V): | 67 |
| Duty Cycle (%): | 25℃/60% |
| Electrode Diameter (mm): | 1.6–4.0mm |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| / | / | / | / |

## PMIG120-C — GASLESS MIG WELDER



| | |
|---|---|
| Voltage/frequency: | 230V±15~/50~60 Hz |
| Output Current (A): | 10–120A |
| No-load Voltage (V): | 67 |
| Duty Cycle (%): | 25℃/60% |
| Electrode Diameter (mm): | 0.8-1.0(1kg) |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| / | / | / | / |

## PMI160-C — GAS-SHIELDED FLUX-CORED WELDER



| | |
|---|---|
| Voltage/frequency: | 230V±15~/50~60 Hz |
| Output Current (A): | 20-160A |
| No-load Voltage (V): | 67 |
| Duty Cycle (%): | 25℃/60% |
| Electrode Diameter (mm): | 0.8-1.0(1kg/5kg) |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| / | / | / | / |

## PGE2800-G — GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 15L |
| Speed: | 3000r/min |
| Displacement: | 212cc |

**2800W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107100101010 | 60x44x45cm | 1pc/CTN | 37.7/39.2kg |

## PGE3500-G — GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 15L |
| Speed: | 3500r/min |
| Displacement: | 223cc |

**3500W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107100201010 | 60x44x45cm | 1pc/CTN | 39.8/41.3kg |

## PGE5000-G — GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 25L |
| Speed: | 3000r/min |
| Displacement: | 420cc |

**5000W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107100301010 | 71x54x57cm | 1pc/CTN | 70/71kg |

## PGE5500-G — GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 26L |
| Speed: | 3600r/min |
| Displacement: | 420cc |

**5500W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107100401010 | 71x54x59cm | 1pc/CTN | 84/86kg |

## PGE2000-G GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 5.6L |
| Speed: | 5100r/min |
| Displacement: | 79.8cc |

PROFESSIONAL **2000W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107100501010 | 55.5x35.5x53cm | 1pc/CTN | 20/22.5kg |

## PGE5500-G2 GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 7L |
| Speed: | 4300r/min |
| Displacement: | 236cc |

PROFESSIONAL **5500W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107100601010 | 45.5x38.5x49cm | 1pc/CTN | 30/32kg |

## PGE3700-G1 GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 7L |
| Speed: | 3600r/min |
| Displacement: | 223cc |

**3700W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107100701010 | 45.5x38.5x49cm | 1pc/CTN | 27/29kg |

## PGE5500-G1 GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 15L |
| Speed: | 4300r/min |
| Displacement: | 236cc |

**5500W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107100801010 | 69.5x58x75.5cm | 1pc/CTN | 39.5/41.5kg |

## PGE1100-G GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 5L |
| Speed: | 3600r/min |
| Displacement: | 223cc |

**1100W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107100901010 | 39x36.5x46.5cm | 1pc/CTN | 25/27kg |

## PGE1000-G GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 12L |
| Speed: | 3600r/min |
| Displacement: | 212cc |

**1000W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107101001010 | 52x44x53.5cm | 1pc/CTN | 33/35kg |

## PGE2200-G GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 25L |
| Speed: | 3600r/min |
| Displacement: | 460cc |

**2200W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107101101010 | 65x57x65cm | 1pc/CTN | 66/70kg |

## PGE1100-G1 GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 7L |
| Speed: | 3600r/min |
| Displacement: | 236cc |

**1100W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107101201010 | 45.5x38.5x48.5cm | 1pc/CTN | 31/32.5kg |




## PGE3300-G GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 6L |
| Speed: | 4600r/min |
| Displacement: | 149cc |

**3300W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107101301010 | 53.5x36.5x52cm | 1pc/CTN | 25/27kg |

## PGE4500-G GASOLINE GENERATOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Fuel Tank Capacity: | 10L |
| Speed: | 3600r/min |
| Displacement: | 236cc |

**4500W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107101401010 | 62.5x48.5x57cm | 1pc/CTN | 44/46kg |




## PAC9-C1 AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 9L |
| Air Flow: | 200L/min |
| Speed: | 2800r/min |
| Pressure: | 8bar |

1100W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107001401010 | / | 1pc/CTN | / |

## PAC24-C2 AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 24L |
| Air Flow: | 240L/min |
| Speed: | 2800r/min |
| Pressure: | 8bar |

1600W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107001003010 | / | 1pc/CTN | / |

## PAC24-C3 AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 24L |
| Air Flow: | 220L/min |
| Speed: | 2800r/min |
| Pressure: | 8bar |

PROFESSIONAL 1400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107001501010 | / | 1pc/CTN | / |

## PAC50-C1 AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 50L |
| Air Flow: | 240L/min |
| Speed: | 2800r/min |
| Pressure: | 8bar |

PROFESSIONAL 1600W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107001103010 | / | 1pc/CTN | / |



## PAC50-C3 AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 50L |
| Air Flow: | 200L/min |
| Speed: | 2800r/min |
| Pressure: | 8bar |

1400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107001601010 | / | 1pc/CTN | / |

## PAC50-C4 AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 50L |
| Air Flow: | 400L/min |
| Speed: | 2800r/min |
| Pressure: | 8bar |

PROFESSIONAL 2200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107001701010 | / | 1pc/CTN | / |

## PAC100-C3 AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 100L |
| Air Flow: | 720L/min |
| Speed: | 2800r/min |
| Pressure: | 8bar |

PROFESSIONAL 4800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107001801010 | / | 1pc/CTN | / |

## PAC100-C4 AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 100L |
| Air Flow: | 600L/min |
| Speed: | 2800r/min |
| Pressure: | 8bar |

PROFESSIONAL 3300W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107001901010 | / | 1pc/CTN | / |

## PAC24-C AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 24L |
| Air Flow: | 250 L/min |
| Speed: | 2850r/min |
| Pressure: | 8bar |

1500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107000201010 | 58x28.5x59cm | 1pc/CTN | 18/20kg |

## PAC100-C AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 100L |
| Air Flow: | 450L/min |
| Speed: | 950r/min |
| Pressure: | 8bar |

2200W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107000501010 | 107.3x43.8x78.9cm | 1pc/CTN | 58/67kg |

## PAC50-C AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 50L |
| Air Flow: | 300 L/min |
| Speed: | 2850r/min |
| Pressure: | 8bar |

1800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107000301010 | 66x32.5x64cm | 1pc/CTN | 25/28kg |

## PAC100-C1 AIR COMPRESSOR



| | |
|---|---|
| Voltage/Frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 100L |
| Pump-Up Time: | 370L/min |
| Maximum Pressure: | 8Bar |
| No-load Speed: | 2950r/min |

PROFESSIONAL 2500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107001201010 | 107x41.5x73.5cm | 1pc/CTN | 48/56kg |

## PAC100-C2 AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Tank Capacity: | 100L |
| Air Flow: | 370L/min |
| Speed: | 950r/min |
| Pressure: | 8bar |

PROFESSIONAL 3300W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107000601010 | 107.3x43.8x83.5cm | 1pc/CTN | 62.5/71.5kg |

## PAC200-C AIR COMPRESSOR



| | |
|---|---|
| Voltage/frequency: | 380V~50Hz |
| Tank Capacity: | 200L |
| Air Flow: | 1030L/min |
| Speed: | 900r/min |
| Pressure: | 8bar |

PROFESSIONAL 5500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107000701010 | 148x54x91.5cm | 1pc/CTN | 150/170kg |



## PNA16-A PNEUMATIC STAPLER



| | |
|---|---|
| Pressure: | 90Psi |
| Magazine Capacity: | 33.9L/min |
| Staple Length: | 6-16mm |
| Air Flow: | 140pcs |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103800401010 | 53.5x30x17.5cm | 10pcs/CTN | 11.2/11.7kg |

## PNA50-A PNEUMATIC STAPLER



| | |
|---|---|
| Pressure: | 90Psi |
| Magazine Capacity: | 67.9L/min |
| Brad Nails: | 15-50mm |
| Staples: | 16-40mm |
| Air Flow: | 100pcs |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103800501010 | 56x33.5x28.5cm | 10pcs/CTN | 15.4/16kg |

## PAW700-A PNEUMATIC IMPACT WRENCH



| | |
|---|---|
| Pressure: | 90PSI |
| Speed: | 0-7000r/min |
| Torque: | 680N-m |
| Air Consumption: | 120L/min |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101600601010 | 40x23.5x22.5cm | 5pcs/CTN | 13/17kg |

## PAW1300-A PNEUMATIC IMPACT WRENCH



| | |
|---|---|
| Pressure: | 90PSI |
| Speed: | 0-5000r/min |
| Torque: | 1300N-m |
| Air Consumption: | 220l/min |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 101600701010 | 30x24.5x29.2cm | 3pcs/CTN | 14/16kg |

## PSG600-A HVLP PNEUMATIC SPRAY GUN



| | |
|---|---|
| Pressure: | 43Psi |
| Specification: | Ø1.4mm |
| Spray Width: | 200±20%mm |
| Air Consumption: | 240±15%L/Min |
| Air Flow: | 600ml |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103900501010 | 68x47x26cm | 20pcs/CTN | 17.5/18.5kg |

## PSG600-A1 HVLP PNEUMATIC SPRAY GUN



| | |
|---|---|
| Pressure: | 50Psi |
| Specification: | Ø1.5mm |
| Spray Width: | 190±15%L/Min |
| Air Consumption: | 190±15%L/Min |
| Air Flow: | 600ml |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103900601010 | 57x37x40cm | 20pcs/CTN | 12/13kg |

## PGG45-A AIR GREASE INJECTOR



| | |
|---|---|
| Gas Consumption: | 250L/min |
| Oil Volume: | 0.85L/min |
| Operating Pressure: | 6-8bar |
| Air Flow: | 45L |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 104600201010 | 40x40x83cm | 1pc/CTN | 17/18kg |

## PPG4-A AIR TIRE INFLATING GUN



| | |
|---|---|
| Range and precision: | 3-250psi |
| Rubber tube: | 360mm PVC pipe |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 104200101010 | 68x38x33cm | 40pcs/CTN | 15/16kg |

## PSG1000-A HVLP PNEUMATIC SPRAY GUN



| | |
|---|---|
| Pressure: | 43Psi |
| Specification: | Ø1.4mm |
| Spray Width: | 200±20%mm |
| Air Consumption: | 280±15%L/Min |
| Air Flow: | 1000ml |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103900701010 | 75x24x27cm | 10pcs/CTN | 11.5/12.5kg |

## PSG1000-A1 PNEUMATIC SPRAY GUN



| | |
|---|---|
| Pressure: | 50Psi |
| Specification: | Ø1.5mm |
| Spray Width: | 210±20%mm |
| Air Consumption: | 190±15%L/Min |
| Air Flow: | 1000ml |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 103900801010 | 57x35x29.5cm | 10pcs/CTN | 8/9kg |

## PTS10-D 5 PIECES AIR TOOL KIT



| | |
|---|---|
| Spray Gun: | 1pc |
| Air Blow Gun: | 1pc |
| Air Tyre Inflator: | 1pc |
| Air Engine Cleaning Gun: | 1pc |
| Spiral Hose: | 1pc |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 107700101010 | 56x41.5x48cm | 10set/CTN | 16.5/17.5kg |




## POG370-P — SELF-PRIMING PUMP




| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 1.8m³/h |
| Max.head: | 30m |

370W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105601501010 | 32x30.5x3cm | 4pcs/CTN | 17.5/19kg |

## POG370-P1 — SELF-PRIMING PUMP




| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 2m³/h |
| Max.head: | 30m |

370W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105601601010 | 30.5x23.5x30cm | 1pc/CTN | 6.5/7.5kg |

## POG750-P — SELF-PRIMING PUMP




| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 2.8m³/h |
| Max.head: | 45m |

750W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105601701010 | 52x33x56cm | 1pc/CTN | 17/18kg |

## POG25-S1 — CIRCULATING PUMP




| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 93/67/46W |
| Max.head: | 6m |
| Max.Flow: | 3.8m³/h |

93/67/46W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105600201010 | 46.5x21.5x27.5cm | 6pcs/CTN | 16.5/17.5kg |

## POG32-S1 — CIRCULATING PUMP




| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 93/67/46W |
| Flow Rate: | 4.5m³/h |
| Max.head: | 6m |

93/67/46W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105600401010 | 46.5x21.5x27.5cm | 6pcs/CTN | 19/20kg |

## PSW30-C — CLEAN WATER PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Max.flow: | 8L/min |
| Max.head: | 10m |

30W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105701801010 | 54.5x28x53cm | 100pcs/CTN | 24.5/25.5kg |

## PSW370-T — SCREW PUMP




| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 1.2m³/h |
| Max.head: | 70m |

370W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105700101010 | 56x10x16cm | 1pc/CTN | 7.5/8kg |

## PSW550-T — SCREW PUMP




| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 1.4m³/h |
| Max.head: | 80m |

550W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105700201010 | 58x10x16cm | 1pc/CTN | 8/9kg |

## PSW750-T — SCREW PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 1.8m³/h |
| Max.head: | 100m |

750W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105700301010 | 60x10.5x17cm | 1pc/CTN | 12/12.5kg |

## PSW750-T1 — SCREW PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 2m³/h |
| Max.head: | 130m |

900W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105700401010 | 63x10.5x17cm | 1pc/CTN | 12.5/13kg |

## POG550-P1 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 3m³/h |
| Max.head: | 48m |

Copper motor winding | Brass impeller

550W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105600501010 | 39.5x36x23cm | 2pcs/CTN | 16.5/17.5kg |

## POG550-P2 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 3.5m³/h |
| Max.head: | 40m |

Copper motor winding | Brass impeller

550W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105600601010 | 32.6x25.8x34cm | 1pc/CTN | 12.5/13.5kg |

## PSW750-W — SEWAGE PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 10m³/h |
| Max.head: | 16m |

750W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105702101010 | 43x28x24cm | 1pc/CTN | 13.5/14kg |

## PSW900-W3 — SEWAGE PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 12m³/h |
| Max.head: | 18m |

900W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105702501010 | 43x28x24cm | 1pc/CTN | 14/15kg |

## POG550-P3 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 5.8m³/h |
| Max.head: | 28m |

Copper motor winding | Brass impeller

550W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105600701010 | 34x21x26.5cm | 1pc/CTN | 10.5/11.5kg |

## POG750-P1 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 3.5m³/h |
| Max.head: | 58m |

Copper motor winding | Brass impeller

750W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105600801010 | 39.5x36.5x23cm | 2pcs/CTN | 22/23kg |

## PSW1100-W2 — CUTTING SEWAGE PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 15m³/h |
| Max.head: | 20m |

1100W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105702801010 | 45x28x24cm | 1pc/CTN | 16/17kg |

## POG370-P2 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Max.flow: | 2m³/h |
| Max.head: | 35m |

Copper motor winding | Brass impeller

370W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105602601010 | 30.3x29x35.1cm | 4pcs/CTN | 20/20.5kg |

## POG750-P2 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 3.8m³/h |
| Max.head: | 50m |

Copper motor winding | Brass impeller

50W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105600901010 | 32.6x25.8x34cm | 1pc/CTN | 13/14kg |

## POG750-P3 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Max.flow: | 6.2m³/h |
| Max.head: | 35m |

Copper motor winding | Brass impeller

750W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105601001010 | 34×21×26.5cm | 1pc/CTN | 11.5/12.5kg |

## POG370-P3 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 2.5m³/h |
| Max.head: | 35m |

Copper motor winding | Brass impeller

370W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105602701010 | 30.5x24.2x32.5cm | 1pc/CTN | 8.5/9.5kg |

## POG370-P4 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 5.5m³/h |
| Max.head: | 23m |

Copper motor winding | Brass impeller

370W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105602801010 | 28.5x18x23cm | 1pc/CTN | 11/12kg |

## POG750-P4 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 4.1m³/h |
| Max.head: | 37m |

Copper motor winding | Brass impeller

750W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105601101010 | 47.5x19x24cm | 1pc/CTN | 14.5/15kg |

## POG1100-P3 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 8m³/h |
| Max.head: | 40m |

Copper motor winding | Brass impeller

1100W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105601201010 | 38x24.5x29.5cm | 1pc/CTN | 13/14kg |

## POG1100-P4 — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 4.6m³/h |
| Max.head: | 42m |

Copper motor winding | Brass impeller

**1100W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105601301010 | 47.5x19x24cm | 1pc/CTN | 15/15.5kg |

## POG1500-P — SELF-PRIMING PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 4.6m³/h |
| Max.head: | 47.5m |

Copper motor winding | Brass impeller

**1500W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105601401010 | 47.5x19x24cm | 1pc/CTN | 15.5/16.5kg |

## PSW1100-C — CLEAN WATER PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 55m³/h |
| Max.head: | 15m |

Copper motor winding | Brass impeller

**1100W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105701601010 | 51.5x30.5x24.2cm | 1pc/CTN | 16.5/17.5kg |

## PSW1500-C — CLEAN WATER PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 80m³/h |
| Max.head: | 12m |

Copper motor winding | Brass impeller

**1500W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105701701010 | 51.5x33x26.5cm | 1pc/CTN | 22/23kg |

## PSW370-C — CLEAN WATER PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 5.5m³/h |
| Max.head: | 20m |

Copper motor winding | Brass impeller

**370W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105701001010 | 39.5x19x20.5cm | 1pc/CTN | 8/8.5kg |

## PSW550-C2 — CLEAN WATER PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 18m³/h |
| Max.head: | 15m |

Copper motor winding | Brass impeller

**550W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105701101010 | 43.7x25x21cm | 1pc/CTN | 11/12kg |

## PSW750-C — CLEAN WATER PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 10m³/h |
| Max.head: | 35m |

Copper motor winding | Brass impeller

**750W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105701201010 | 43.7x25x23.2cm | 1pc/CTN | 13/14kg |

## PSW750-C1 — CLEAN WATER PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Max.flow: | 28m³/h |
| Max.head: | 20m |

Copper motor winding | Brass impeller

**750W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105701301010 | 43.7x25x21cm | 1pc/CTN | 12.5/13.5kg |

## PSW750-C2 — CLEAN WATER PUMP



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 28m³/h |
| Max.head: | 20m |

Copper motor winding | Brass impeller

**750W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105701401010 | 43.7x25x21cm | 1pc/CTN | 12.5/13.5kg |

## PSW750-C3 — CLEAN WATER PUMP




| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Flow Rate: | 55m³/h |
| Max.head: | 12m |

Copper motor winding | Brass impeller

**750W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105701501010 | 47.5x29x25.7cm | 1pc/CTN | 14.5/15.5kg |



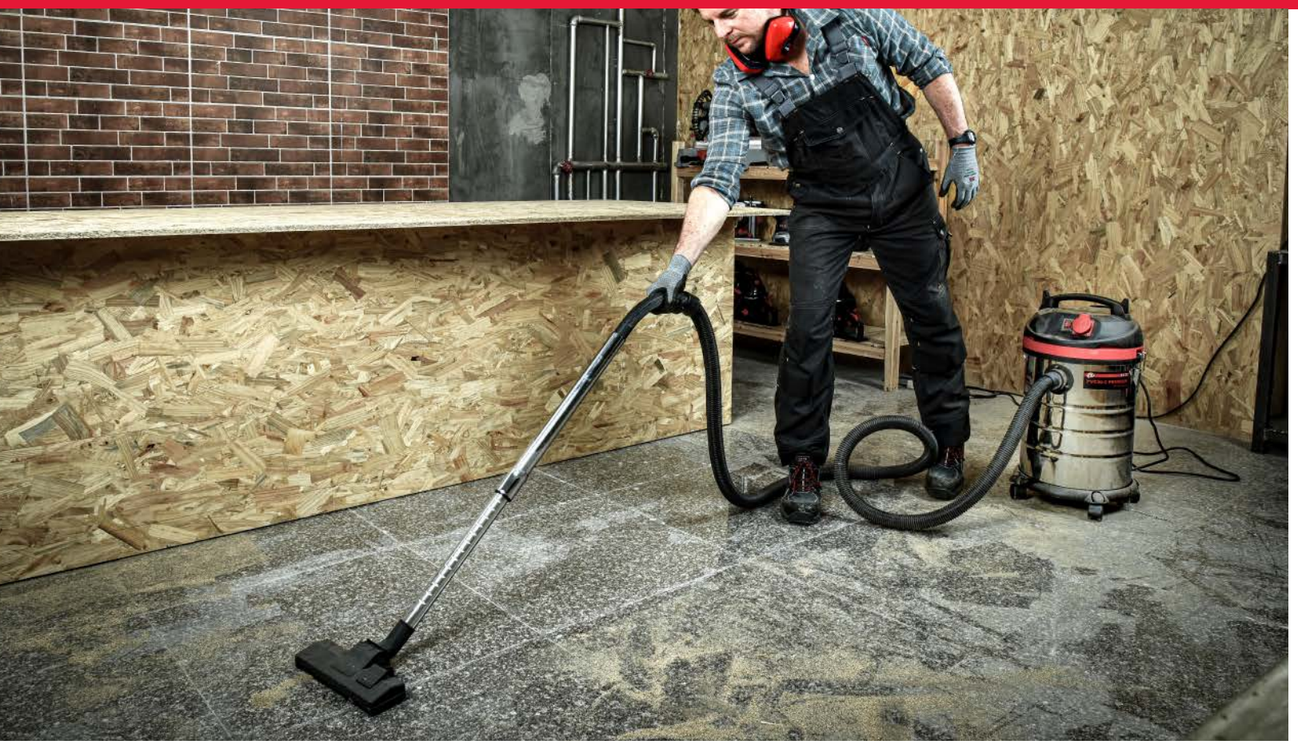

## PVC60-C VACUUM CLEANER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Capacity: | 60L |
| Vacuum: | 18kpa |

PROFESSIONAL **2400W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105800803010 | / | 1pc/CTN | / |

## PVC80-C VACUUM CLEANER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Capacity: | 60L |
| Suction: | 18Kpa |

PROFESSIONAL **2400W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105801301010 | / | 1pc/CTN | / |

## PBO750-C WORKSHOP BLOWER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 0-19300r/min |
| Max.Flow: | 2.8m³/h |

**750W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106000301010 | 54.5x26.5x40cm | 6pcs/CTN | 10.5/11.5kg |

## PHP120-C1 HIGH PRESSURE CLEANERS



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Max. Pressure: | 130bar |
| Max. Delivery Rate: | 390L/h |
| High Pressure Pipe: | 5m |

**1700W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105900103010 | 26x25x42cm | 1pc/CTN | 5/5.5kg |

## PVC15-C VACUUM CLEANER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| capacity: | 15L |
| Max.sealed Suction: | 17kpa |

**1200W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105801201010 | 32x32x43cm | 1pc/CTN | 5/5.5kg |

## PVC20-C VACUUM CLEANER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| capacity: | 20L |
| Max.sealed Suction: | 16kpa |

**1500W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105800403010 | 35.5x35.5x50cm | 1pc/CTN | 6.5/7.5kg |

## PVC30-C VACUUM CLEANER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Capacity: | 30L |
| Vacuum: | 16kpa |

PROFESSIONAL **1500W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105800503010 | / | 1pc/CTN | / |

## PVC30-C1 VACUUM CLEANER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Capacity: 30L | 30L |
| Suction: | >20Kpa |

PROFESSIONAL **1600W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105800601010 | 46.5x37.5x60cm | 1pc/CTN | 14/16.4kg |

## PHP140-C2 HIGH PRESSURE CLEANERS



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Max. Pressure: | 140bar |
| Max. Delivery Rate: | 420L/h |
| High Pressure Pipe: | 5m |

**1800W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105900601010 | 32x32x40cm | 1pc/CTN | 6.5/7kg |

## PHP170-C2 HIGH PRESSURE CLEANERS



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Max. Pressure: | 170bar |
| Max. Delivery Rate: | 450L/h |
| High Pressure Pipe: | 8m |

PROFESSIONAL **2200W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105900701010 | 45x33x51cm | 1pc/CTN | 8.5/10kg |

## PHP170-C3 HIGH PRESSURE CLEANER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Max. Pressure: | 170bar |
| Max. Delivery Rate: | 450L/h |
| High Pressure Pipe: | 8m |

PROFESSIONAL **2200W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105900801010 | 45x33x51cm | 1pc/CTN | 8.5/10kg |

## PHP180-C1 HIGH PRESSURE CLEANERS



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Max. Pressure: | 180bar |
| Max. Delivery Rate: | 480L/h |
| High Pressure Pipe: | 10m |

PROFESSIONAL **2800W** Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 105900901010 | 37x36.5x76cm | 1pc/CTN | 12/13.5kg |




## PKE405-D1 ELECTRIC CHAIN SAW



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| No-load Speed: | 5000r/min |
| Guide Bar Length: | 405mm(16") |
| Fuel Tank Capacity: | 125ml |
| Chain Speed: | 11m/s |

1600W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106300501010 | 47x46x37cm | 4pcs/CTN | 19.5/21kg |

## PKE405-C4 ELECTRIC CHAIN SAW



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 4500r/min |
| Specification: | 405mm(16") |
| Fuel Tank Capacity: | 100ml |
| Chain Speed: | 10m/s |

1800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106300601010 | 53.5x45x37.5cm | 4pcs/CTN | 22.5/24.5kg |

## PKE405-C5 ELECTRIC CHAIN SAW



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 6000r/min |
| Specification: | 405mm(16") |
| Chain Speed: | 13.5m/s |

PROFESSIONAL 2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106300701010 | 54.5x47x24.5cm | 2pcs/CTN | 13.5/14.5kg |

## PKE405-C7 ELECTRIC CHAIN SAW



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 8500r/min |
| Specification: | 405mm(16") |
| Chain Speed: | 14.5m/s |

PROFESSIONAL 2400W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106300701010 | 54.5x47x24.5cm | 2pcs/CTN | 13.5/14.5kg |

## GCS45-C6 GASOLINE CHAIN SAW



| | |
|---|---|
| Displacement: | 52cc |
| No-load Speed: | 11000r/min |
| Guide Bar Length: | 400mm(16") |
| Fuel Tank Capacity: | 550ml |
| Oil Tank Capacity: | 260ml |

2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106301102010 | 54x44x28.5cm | 2pcs/CTN | / |

## PHE450-C HEDGE TRIMMER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 1700spm |
| Specification: | 450mm(18") |

500W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106700201010 | 93x29.5x25cm | 4pcs/CTN | 11.5/12.7kg |

## PHE550-C HEDGE TRIMMER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 1500spm |
| Specification: | 550mm(22") |

600W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106700301010 | 105x42x25cm | 4pcs/CTN | 14/15kg |



## PTR1000-EL ELECTRIC TRIMMER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 10000r/min |
| Specification: | 300mm(12") |

750W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106100701010 | 98x25x24cm | 2pcs/CTN | 5.8/6.5kg |

## PTR1250-EL ELECTRIC BRUSH TRIMMER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 6800r/min |
| Specification: | 255/420mm(10"/16-9/16") |

1600W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106100801010 | 92x24.5x24.5cm | 2pcs/CTN | 12.5/13kg |

## PTR1750-EL ELECTRIC BRUSH TRIMMER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 6800r/min |
| Specification: | 255/420mm(10"/16-9/16") |

1700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106100901010 | 92x24.5x26.5cm | 2pcs/CTN | 13/13.5kg |

## PTR2000-EL ELECTRIC BRUSH TRIMMER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| Speed: | 7500r/min |
| Specification: | 255/400mm(10"/16") |

2000W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106101001010 | 101x24.5x26cm | 2pcs/CTN | 14.5/15.5kg |

## P38-C GASOLINE BRUSH TRIMMER



| | |
|---|---|
| Displacement: | 38cc |
| Speed: | 9000r/min |
| Kettle capacity: | 0.95L |
| Specification: | 255/440mm(10"/17") |

1.7HP Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106101201010 | 36x30x24.2cm | 1pc/CTN | 6.5/7kg |

## PTR440-C GASOLINE BRUSH TRIMMER



| | |
|---|---|
| Displacement: | 56cc |
| Speed: | 8500r/min |
| Kettle capacity: | 1.2L |
| Specification: | 255/440mm(10"/17") |

1700W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106102201010 | / | / | / |

## PLE-2B LASER LEVEL




| | |
|---|---|
| Color Of Beam: | Green |
| Number Of Lines: | 2 |
| Auto-compensation Range : | 4°±1° |
| Leveling Accuracy: | ±3mm/10m |
| Working Distance: | 30m |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 309000501000 | 34.3x29x40cm | 24pcs/CTN | 12/12.06kg |

## PLE-5B LASER LEVEL




| | |
|---|---|
| Voltage: | DC 4.2V |
| Laser Beam: | 1V/3601H |
| Color Of Beam: | Green |
| Number Of Lines: | 5 |
| Auto-compensation Range : | 4°±1° |

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 309000301000 | 48x36.5x38.5cm | 20pcs/CTN | 15/16kg |



## PLM32-C1 ELECTRIC LAWN MOWER



| | |
|---|---|
| Voltage/frequency: | 220-240V ~ 50/60Hz |
| No-load Speed: | 3500r/min |
| Cutting Diameter: | 320mm(13") |
| Cutting Height: | 20-60mm |
| Grass Bag Capacity: | 30L |

1300W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106201901010 | / | 1pc/CTN | / |

## PLM40-C1 ELECTRIC LAWN MOWER



| | |
|---|---|
| Voltage/frequency: | 220-240V~50/60Hz |
| No-load Speed: | 3300r/min |
| Cutting Diameter: | 400mm(16") |
| Cutting Height: | 25-75mm |
| Grass Bag Capacity: | 40L |

1800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106202001010 | / | 1pc/CTN | / |

## PLM51-C2 GASOLINE LAWN MOWER

| | |
|---|---|
| Power: | 3.5HP |
| Engine Capacity: | 139CC |
| No-load speed: | 3000r/min |
| Mowing width: | 510mm(20") |
| Mowing height: | 25-75mm |



3.5HP Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106200601010 | 83x58x48cm | 1pc/CTN | 34/37kg |

## P51210 GASOLINE EARTH AUGER

| | |
|---|---|
| Displacement: | 52cc |
| Speed: | 7200-8000r/min |
| Fuel Tank Capacity: | 1200ml |
| Specification: | 200mm(8") |
| | |



1800W Powerful Efficient

| Product No. | Outer Carton Size | Qty | N.W / G.W |
|---|---|---|---|
| 106500101010 | 39.7x29.2x29cm | 1pc/CTN | 9.49/10.19kg |






# ACCESSORIES

## PRECISION THAT PERFORMS

**Cut. Drill. Grind.**

**DRUAPOWER** tools can provide high-precision solutions and maintain prolonged continuous operation with high accuracy and long working life.The user are mostly professional factories or engineering construction teams.

ULTIMATE QUALITY

**ADVANCEPOWER** products are suited to rugged conditions, the working condition focuses on stability. Mainly used in construction, plumbing, building roads, decoration, woodworking, metalworking and other industries that demand heavy-duty performance.

PLATINUM QUALITY

**CONTROL POWER** High cost-performance ratio, good portability and versatility.They are mainly used in scenarios where high precision and prolonged operation time are not required. Suitable for occasional repair jobs and simple DIY tasks.

PREMIUM QUALITY






# ACCESSORIES DRILLING Metal























## DIN338 HSS TWIST DRILL BIT

2X LONG LIFE · HSS 4241 · FULLY GROUND · DIN 338 · 60-63 HRC · STEEL · PVC PIPE · FE PIPE

High-performance ground standard twist drill made from heavy-duty high speed steel.
The fully ground twist drill has a precise concentricity. Thanks to the split point, this drill has good centring properties and requires little pressure.
DIN 338, right hand cut, type N, precision ground, self colour.
Tip angle 135°. Cylindrical, industrial quality, ideal for drilling steel and alloyed steel,cast steel,die castings, sintered steel, non-ferrous metals and hard plastics.




| Model | Diameter (mm) | Overall Length (mm) | Work Length (mm) | Point Angle |
|---|---|---|---|---|
| AMED01-0001 | 1 | 34 | 12 | 118° |
| AMED01-0105 | 1.5 | 40 | 18 | 118° |
| AMED01-0002 | 2 | 49 | 24 | 118° |
| AMED01-0205 | 2.5 | 57 | 30 | 118° |
| AMED01-0003 | 3 | 61 | 33 | 135° |
| AMED01-0302 | 3.2 | 65 | 36 | 135° |
| AMED01-0305 | 3.5 | 70 | 39 | 135° |
| AMED01-0004 | 4 | 75 | 43 | 135° |
| AMED01-0402 | 4.2 | 75 | 43 | 135° |
| AMED01-0405 | 4.5 | 80 | 47 | 135° |
| AMED01-0408 | 4.8 | 86 | 52 | 135° |
| AMED01-0005 | 5 | 86 | 52 | 135° |
| AMED01-0505 | 5.5 | 93 | 57 | 135° |
| AMED01-0006 | 6 | 93 | 57 | 135° |
| AMED01-0605 | 6.5 | 101 | 63 | 135° |
| AMED01-0007 | 7 | 109 | 69 | 135° |
| AMED01-0705 | 7.5 | 109 | 69 | 135° |
| AMED01-0008 | 8 | 117 | 75 | 135 |
| AMED01-0805 | 8.5 | 117 | 75 | 135° |
| AMED01-0009 | 9 | 125 | 81 | 135° |
| AMED01-0905 | 9.5 | 125 | 81 | 135° |
| AMED01-0010 | 10 | 133 | 87 | 135° |
| AMED01-0011 | 11 | 142 | 94 | 135° |
| AMED01-0012 | 12 | 151 | 101 | 135° |
| AMED01-0013 | 13 | 151 | 101 | 135 |
| AMED01-0014 | 14 | 160 | 108 | 135° |
| AMED01-0015 | 15 | 169 | 114 | 135° |
| AMED01-0016 | 16 | 178 | 120 | 135° |

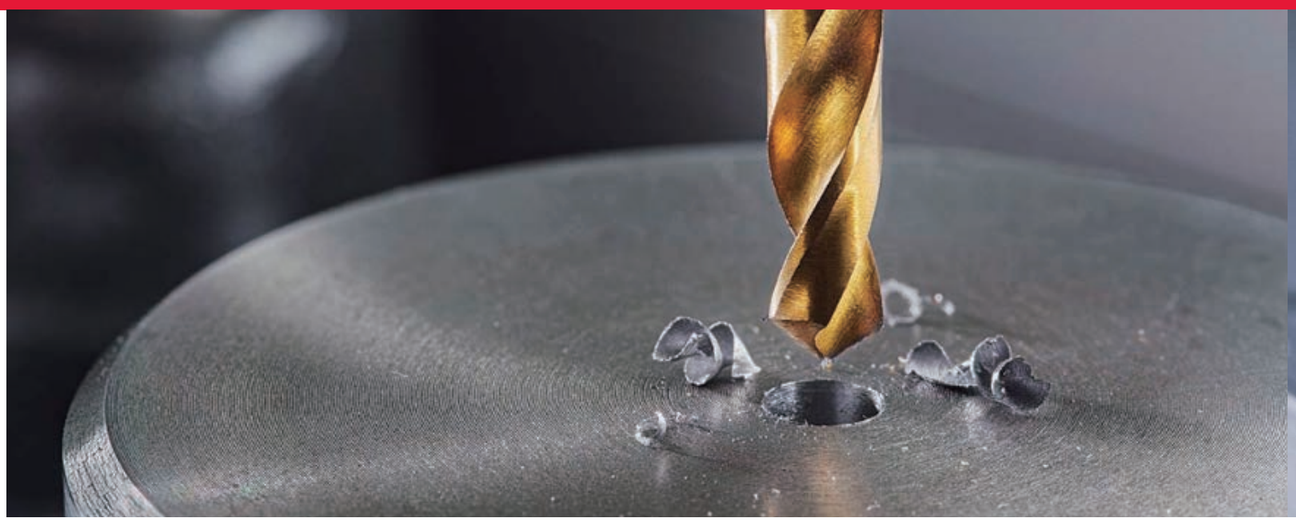



DRUAPOWER

## DIN338 HSS TWIST DRILL BIT

2X LONG LIFE | HSS Co | FULLY GROUND | DIN 338 | 65-67 HRC | STEEL | PVC PIPE | FE PIPE | STAINLESS STEEL







High-performance ground standard twist drill made from heavy-duty high speed steel.
The fully ground twist drill has a precise concentricity. Thanks to the split point, this drill has good centring properties and requires little pressure.
DIN 338, right hand cut, type N, precision ground, self colour.
Tip angle 135°. Cylindrical, industrial quality, ideal for drilling steel and alloyed steel,cast steel,die castings, sintered steel, non-ferrous metals and hard plastics.

| Model | Diameter (mm) | Overall Length (mm) | Work Length (mm) | Point Angle |
|---|---|---|---|---|
| AMED02-0001 | 1 | 34 | 12 | 118° |
| AMED02-0105 | 1.5 | 40 | 18 | 118° |
| AMED02-0002 | 2 | 49 | 24 | 118° |
| AMED02-0205 | 2.5 | 57 | 30 | 118° |
| AMED02-0003 | 3 | 61 | 33 | 135° |
| AMED02-0302 | 3.2 | 65 | 36 | 135° |
| AMED02-0305 | 3.5 | 70 | 39 | 135° |
| AMED02-0004 | 4 | 75 | 43 | 135° |
| AMED02-0402 | 4.2 | 75 | 43 | 135° |
| AMED02-0405 | 4.5 | 80 | 47 | 135° |
| AMED02-0408 | 4.8 | 86 | 52 | 135° |
| AMED02-0005 | 5 | 86 | 52 | 135° |
| AMED02-0505 | 5.5 | 93 | 57 | 135° |
| AMED02-0006 | 6 | 93 | 57 | 135° |
| AMED02-0605 | 6.5 | 101 | 63 | 135° |
| AMED02-0007 | 7 | 109 | 69 | 135° |
| AMED02-0705 | 7.5 | 109 | 69 | 135° |
| AMED02-0008 | 8 | 117 | 75 | 135° |
| AMED02-0805 | 8.5 | 117 | 75 | 135° |
| AMED02-0009 | 9 | 125 | 81 | 135° |
| AMED02-0905 | 9.5 | 125 | 81 | 135° |
| AMED02-0010 | 10 | 133 | 87 | 135° |
| AMED02-0011 | 11 | 142 | 94 | 135° |
| AMED02-0012 | 12 | 151 | 101 | 135° |
| AMED02-0013 | 13 | 151 | 101 | 135° |

DRUAPOWER

## DIN338 BLACK & GOLD TWIST DRILL BIT

2X LONG LIFE | HSS M2 | FULLY GROUND | DIN 338 | 64-66 HRC | STEEL | PVC PIPE | ALLOY STEEL







High-performance ground standard twist drill made from heavy-duty high speed steel.
The fully ground twist drill has a precise concentricity. Thanks to the split point, this drill has good centring properties and requires little pressure.
DIN 338, right hand cut, type n, precision ground, self colour.
Tip angle 135 deg. Cylindrical, industrial quality, idealfor drilling steel and alloyed steel,cast steel,die castings, sintered steel, non-ferrous metals and hard plastics.

| Model | Diameter (mm) | Overall Length (mm) | Work Length (mm) | Point Angle |
|---|---|---|---|---|
| AMED15-0001 | 1 | 34 | 12 | 118° |
| AMED15-0105 | 1.5 | 40 | 18 | 118° |
| AMED15-0002 | 2 | 49 | 24 | 118° |
| AMED15-0205 | 2.5 | 57 | 30 | 118° |
| AMED15-0003 | 3 | 61 | 33 | 135° |
| AMED15-0302 | 3.2 | 65 | 36 | 135° |
| AMED15-0305 | 3.5 | 70 | 39 | 135° |
| AMED15-0004 | 4 | 75 | 43 | 135° |
| AMED15-0402 | 4.2 | 75 | 43 | 135° |
| AMED15-0405 | 4.5 | 80 | 47 | 135° |
| AMED15-0408 | 4.8 | 86 | 52 | 135° |
| AMED15-0005 | 5 | 86 | 52 | 135° |
| AMED15-0505 | 5.5 | 93 | 57 | 135° |
| AMED15-0006 | 6 | 93 | 57 | 135° |
| AMED15-0605 | 6.5 | 101 | 63 | 135° |
| AMED15-0007 | 7 | 109 | 69 | 135° |
| AMED15-0705 | 7.5 | 109 | 69 | 135° |
| AMED15-0008 | 8 | 117 | 75 | 135° |
| AMED15-0805 | 8.5 | 117 | 75 | 135° |
| AMED15-0009 | 9 | 125 | 81 | 135° |
| AMED15-0905 | 9.5 | 125 | 81 | 135° |
| AMED15-0010 | 10 | 133 | 87 | 135° |
| AMED15-0011 | 11 | 142 | 94 | 135° |
| AMED15-0012 | 12 | 151 | 101 | 135° |
| AMED15-0013 | 13 | 151 | 101 | 135° |






DRUAPOWER

## HSS SMART STEP TWIST DRILL BIT

HSS · MORE HOLES 3X · FULLY GROUND · 2X FASTER SPEED · PERFECT CENTERING · STEEL · PVC PIPE · FE PIPE · STAINLESS STEEL

High-performance drill bits with unique shark-step technology provide high-precision circular holes in steel, aluminum, plastic, non-ferrous metals, and more. The unique step-tip geometry creates precise circular holes, enables faster cutting than conventional ground twist drill bits, and significantly extends service life. It eliminates the need for pre-drilling and enables precise spot drilling without running off-center. Angled drilling is also possible.







| Model | Diameter (mm) | Overall Length (mm) | Work Length (mm) | Shank Type |
|---|---|---|---|---|
| AMED16-0001 | 1 | 34 | 12 | Round Shank |
| AMED16-0001A | 1.5 | 34 | 12 | Round Shank |
| AMED16-0002 | 2 | 49 | 24 | Round Shank |
| AMED16-0002A | 2.5 | 57 | 30 | Round Shank |
| AMED16-0003 | 3 | 61 | 33 | Round Shank |
| AMED16-0003B | 3.2 | 65 | 36 | Round Shank |
| AMED16-0003A | 3.5 | 70 | 39 | Round Shank |
| AMED16-0004 | 4 | 75 | 43 | Round Shank |
| AMED16-0004B | 4.2 | 75 | 43 | Round Shank |
| AMED16-0004A | 4.5 | 80 | 57 | Round Shank |
| AMED16-0004C | 4.8 | 86 | 52 | Round Shank |
| AMED16-0005 | 5 | 86 | 52 | Triangular Shank |
| AMED16-0005A | 5.5 | 93 | 57 | Triangular Shank |
| AMED16-0006 | 6 | 93 | 57 | Triangular Shank |
| AMED16-0006A | 6.5 | 101 | 63 | Triangular Shank |
| AMED16-0007 | 7 | 109 | 69 | Triangular Shank |
| AMED16-0007A | 7.5 | 109 | 69 | Triangular Shank |
| AMED16-0008 | 8 | 117 | 75 | Triangular Shank |
| AMED16-0008A | 8.5 | 117 | 75 | Triangular Shank |
| AMED16-0009 | 9 | 125 | 81 | Triangular Shank |
| AMED16-0010 | 10 | 133 | 87 | Triangular Shank |
| AMED16-0011 | 11 | 142 | 94 | Triangular Shank |
| AMED16-0012 | 12 | 151 | 101 | Triangular Shank |
| AMED16-0013 | 13 | 151 | 101 | Triangular Shank |

ADVANCEPOWER

## HEX SHANK M2 HSS TWIST DRILL BIT

HSS M2 · FULLY GROUND · 64-65 HRC · 1/4" QUICK CHANGE · STEEL · PVC PIPE · STAINLESS STEEL

HSS twist drills with 1/4" hexagon shank to ISO 1173, E 6.3, right hand cut type n, precision ground, for all cordless drivers and drills, titanium, tip angle 135 deg., for mild steel, cast steel, cast iron, sintered steel, non-ferrous metals and hard plastics.




| Model | Diameter (mm) | Overall Length (mm) | Work Length (mm) |
|---|---|---|---|
| AMED12-0002 | 2 | 69 | 24 |
| AMED12-0205 | 2.5 | 77 | 30 |
| AMED12-0003 | 3 | 81 | 33 |
| AMED12-0302 | 3.2 | 90 | 36 |
| AMED12-0305 | 3.5 | 90 | 39 |
| AMED12-0004 | 4 | 95 | 43 |
| AMED12-0402 | 4.2 | 100 | 43 |
| AMED12-0405 | 4.5 | 100 | 47 |
| AMED12-0005 | 5 | 106 | 52 |
| AMED12-0006 | 6 | 113 | 57 |
| AMED12-0008 | 8 | 117 | 75 |

CONTROLPOWER

## M2 HSS SAW DRILL BIT

HSS 4241 · 60-63 HRC · 1/4" QUICK CHANGE · PVC PIPE · STAINLESS STEEL · ALUMINUM · WOOD

For drilling and milling contours in wood, sheet metal, plastics and other thin-walled materials.
Twist drill at tip with milling cutter design and chip breaker.




| Model | Diameter (mm) | Overall Length (mm) | Work Length (mm) |
|---|---|---|---|
| AMED11-0605 | 6.5 | 85 | 54 |
| AMED11-0008 | 8 | 95 | 60 |

DRUAPOWER







## M42 BI-METAL HOLE SAW

2X LONG LIFE · HSS M42 · SHARP AND DURABLE · ALLOY STEEL

HSS bi-metal hole saws with progressive variable tooth pitch for efficient chip removal. M42 HSS teeth with 8% cobalt provide smooth cutting and long service life. Suitable for steel, castings, RSJs, stainless steel sheet, aluminum, bronze, copper, plastics, acrylic, plasterboard, and wood.

| Model | Diameter (mm) | inches | Cutting Depth (mm) | Overall Height( (mm) |
|---|---|---|---|---|
| AMED05-0020 | 20 | 25/32" | 38 | 51 |
| AMED05-0022 | 22 | 7/8" | 38 | 51 |
| AMED05-0025 | 25 | 1" | 38 | 51 |
| AMED05-0029 | 29 | 1-1/8" | 38 | 50 |
| AMED05-0030 | 30 | 1-3/16" | 38 | 50 |
| AMED05-0032 | 32 | 1-1/4" | 38 | 51 |
| AMED05-0035 | 35 | 1-5/16 | 38 | 51 |
| AMED05-0038 | 38 | 1-1/2" | 38 | 44 |
| AMED05-0040 | 40 | 1-9/16" | 38 | 44 |
| AMED05-0044 | 44 | 1-3/4" | 38 | 44 |
| AMED05-0051 | 51 | 2" | 38 | 44 |
| AMED05-0054 | 54 | 2-1/8" | 38 | 44 |
| AMED05-0057 | 57 | 2-1/4" | 38 | 44 |
| AMED05-0060 | 60 | 2-3/8" | 38 | 44 |
| AMED05-0064 | 64 | 2-1/2" | 38 | 44 |
| AMED05-0068 | 68 | 2-11/16" | 38 | 44 |
| AMED05-0070 | 70 | 2-3/4" | 38 | 44 |
| AMED05-0076 | 76 | 3" | 38 | 44 |
| AMED05-0083 | 83 | 3-1/4" | 38 | 44 |
| AMED05-0089 | 89 | 3-1/2" | 38 | 44 |
| AMED05-0102 | 102 | 4" | 38 | 44 |
| AMED05-0105 | 105 | 4-1/8" | 38 | 44 |
| AMED05-0114 | 114 | 4-1/2" | 38 | 44 |
| AMED05-0121 | 121 | 4-3/4" | 38 | 44 |
| AMED05-0127 | 127 | 5" | 38 | 44 |
| AMED05-0140 | 140 | 5-1/2" | 38 | 44 |
| AMED05-0146 | 146 | 5-3/4" | 38 | 44 |

DRUAPOWER

HSS 9341

Arbor For Use With Bimetal Holesaws. Complete With 6mm (1/4") Hss Pilot Drill.

## HOLE SAW MANDREL



AMED05-308A



AMED05-716A



AMED05-717B



AMED05-308C



AMED05-716C

| Model | Product Name | Arbor Holders | For Holesaws (mm) | Pilot Drill Size (mm) | Shank Type |
|---|---|---|---|---|---|
| AMED05-308A | Hex Shank Hole Saw Mandrel | 3/8" Thread | 14-30 | 6.35×75 | Hex Shank |
| AMED05-716A | Hex Shank Hole Saw Mandrel | 7/16" Thread | 32-152 | 6.35×75 | Hex Shank |
| AMED05-717B | Quik Change Hex Shank Hole Saw Mandrel | 7/16" Thread | 32-152 | 6.35×75 | Quick Change Hex Shank |
| AMED05-308C | SDS Shank Hole Saw Mandrel | 3/8" Thread | 14-30 | 6.35×75 | SDS-Plus |
| AMED05-716C | SDS Shank Hole Saw Mandrel | 7/16" Thread | 32-152 | 6.35×75 | SDS-Plus |



## RECOMMENDED CUTTING SPEEDS FOR BI-METAL HOLE SAWS

| Hole saw (mm) | Mild Steel (r.p.m.) | Stainless Steel (r.p.m.) | Cast Iron (r.p.m.) | Brass (r.p.m.) | Aluminum (r.p.m.) | Wood (r.p.m.) |
|---|---|---|---|---|---|---|
| 14 | 580 | 300 | 400 | 790 | 900 | 3000 |
| 16 | 550 | 275 | 365 | 730 | 825 | 3000 |
| 17 | 500 | 250 | 330 | 665 | 750 | 3000 |
| 19 | 460 | 240 | 300 | 600 | 690 | 3000 |
| 20 | 435 | 230 | 290 | 580 | 660 | 3000 |
| 21 | 425 | 210 | 280 | 560 | 635 | 3000 |
| 22 | 390 | 195 | 260 | 520 | 585 | 3000 |
| 24 | 370 | 185 | 245 | 495 | 555 | 3000 |
| 25 | 350 | 175 | 235 | 470 | 525 | 2700 |
| 27 | 325 | 160 | 215 | 435 | 480 | 2700 |
| 29 | 300 | 150 | 200 | 400 | 450 | 2700 |
| 30 | 285 | 145 | 190 | 380 | 425 | 2400 |
| 32 | 275 | 140 | 180 | 360 | 410 | 2400 |
| 33 | 260 | 135 | 175 | 345 | 390 | 2400 |
| 35 | 250 | 125 | 165 | 330 | 375 | 2400 |
| 37 | 240 | 120 | 160 | 315 | 360 | 2400 |
| 38 | 230 | 115 | 150 | 300 | 345 | 2400 |
| 40 | 220 | 110 | 145 | 290 | 330 | 2100 |
| 41 | 210 | 105 | 140 | 280 | 315 | 2100 |
| 43 | 205 | 100 | 135 | 270 | 305 | 2100 |
| 44 | 195 | 95 | 130 | 260 | 295 | 2100 |
| 46 | 190 | 95 | 125 | 250 | 285 | 2100 |
| 48 | 180 | 90 | 120 | 240 | 270 | 2100 |
| 51 | 170 | 85 | 115 | 230 | 255 | 2000 |
| 52 | 165 | 80 | 110 | 220 | 245 | 2000 |
| 54 | 160 | 80 | 105 | 210 | 240 | 2000 |
| 57 | 150 | 75 | 100 | 200 | 225 | 2000 |

| Hole saw (mm) | Mild Steel (r.p.m.) | Stainless Steel (r.p.m.) | Cast Iron (r.p.m.) | Brass (r.p.m.) | Aluminum (r.p.m.) | Wood (r.p.m.) |
|---|---|---|---|---|---|---|
| 59 | 580 | 300 | 400 | 790 | 900 | 3000 |
| 60 | 550 | 275 | 365 | 730 | 825 | 3000 |
| 64 | 500 | 250 | 330 | 665 | 750 | 3000 |
| 65 | 460 | 240 | 300 | 600 | 690 | 3000 |
| 67 | 435 | 230 | 290 | 580 | 660 | 3000 |
| 68 | 425 | 210 | 280 | 560 | 635 | 3000 |
| 70 | 390 | 195 | 260 | 520 | 585 | 3000 |
| 73 | 370 | 185 | 245 | 495 | 555 | 3000 |
| 76 | 350 | 175 | 235 | 470 | 525 | 2700 |
| 79 | 325 | 160 | 215 | 435 | 480 | 2700 |
| 83 | 300 | 150 | 200 | 400 | 450 | 2700 |
| 86 | 285 | 145 | 190 | 380 | 425 | 2400 |
| 89 | 275 | 140 | 180 | 360 | 410 | 2400 |
| 92 | 260 | 135 | 175 | 345 | 390 | 2400 |
| 95 | 250 | 125 | 165 | 330 | 375 | 2400 |
| 98 | 240 | 120 | 160 | 315 | 360 | 2400 |
| 102 | 230 | 115 | 150 | 300 | 345 | 2400 |
| 105 | 220 | 110 | 145 | 290 | 330 | 2100 |
| 108 | 210 | 105 | 140 | 280 | 315 | 2100 |
| 111 | 205 | 100 | 135 | 270 | 305 | 2100 |
| 114 | 195 | 95 | 130 | 260 | 295 | 2100 |
| 121 | 190 | 95 | 125 | 250 | 285 | 2100 |
| 127 | 180 | 90 | 120 | 240 | 270 | 2100 |
| 133 | 170 | 85 | 115 | 230 | 255 | 2000 |
| 140 | 165 | 80 | 110 | 220 | 245 | 2000 |
| 146 | 160 | 80 | 105 | 210 | 240 | 2000 |
| 152 | 150 | 75 | 100 | 200 | 225 | 2000 |

ADVANCEPOWER




## HSS COUNTERSINK DRILL BIT

2X LONG LIFE · HSS M2 · 64-66 HRC · STAINLESS STEEL · 90°

Because of the CBN deep-ground flutes the cutting edges are extremely sharp.Ideal for burr- and chatter-free deburring and countersinking.Best results at low cutting speeds.



| Model | Diameter (mm) | Overall Length (mm) | Shank Diameter (mm) | Shank Type |
|---|---|---|---|---|
| AMED10-0063 | 6.3 | 45 | 5 | Round Shank |
| AMED10-0083 | 8.3 | 50 | 6 | Round Shank |
| AMED10-0104 | 10.4 | 50 | 6 | Round Shank |
| AMED10-0124 | 12.4 | 55 | 8 | Round Shank |
| AMED10-0165 | 16.5 | 60 | 10 | Round Shank |
| AMED10-0205 | 20.5 | 63 | 10 | Round Shank |
| AMED10-0025 | 25 | 67 | 10 | Round Shank |
| AMED10-0030 | 30 | 71 | 12 | Round Shank |

CONTROLPOWER




## HSS STRAIGHT GROOVE STEP DRILL

HSS 4241 · 60-63 HRC · PERFECT CENTERING · SPLIT 118° POINT · STAINLESS STEEL

Step drill, HSS, with starter point, for drilling from small to large diameters without pre-drilling in thin sheet material, burr-free thanks to chip breaker, no work-hardening, graduated in the most popular drill sizes, for steel sheet, non-ferrous metals and plastics.



| Model | Diameter (mm) | Step Quantity | Max Drilling Thickness (mm) | Shank Type |
|---|---|---|---|---|
| AMED08-0412 | 4-12 | 5 | 4 | Triangular Shank |
| AMED08-0420 | 4-20 | 9 | 5 | Triangular Shank |
| AMED08-0430 | 4-30 | 15 | 5 | Triangular Shank |
| AMED08-0936 | 9-36 | 10 | 5.5 | Triangular Shank |

ADVANCEPOWER




## HSS CBN SPIRAL GROOVE STEP DRILL

2X LONG LIFE · HSS M2 · 63-66 HRC · PERFECT CENTERING · SPLIT 118° POINT · STAINLESS STEEL

The CBN ground and spiral flutes guarantee quiet running and high cutting performance.
Especially, the chip flow is optimized, so even long, non-breaking chips will be removed easily.
The optimized chip flow protects the cutting edges and reduces built-up edges and cold weld marks. for stainless steel grades A2 and A4, steel sheet, non-ferrous metals and plastics.



| Model | Diameter (mm) | Step Quantity | Max Drilling Thickness (mm) | Shank Type |
|---|---|---|---|---|
| AMED09-0412 | 4-12 | 5 | 4 | Triangular Shank |
| AMED09-0420 | 4-20 | 5 | 5 | Triangular Shank |
| AMED09-0430 | 4-30 | 15 | 5 | Triangular Shank |
| AMED09-0936 | 9-36 | 10 | 5.5 | Triangular Shank |


ADVANCEPOWER




## HSS UMBRELLA STEP DRILL

HSS M2 · 64-66 HRC · 135° SPLIT POINT · PERFECT CENTERING · STAINLESS STEEL

Continuous drill, HSS, with starter point, for making holes increasing continuously from small to large diameter without pre-drilling in thin sheet metal, burr-free thanks to chip-breaking action, no work hardening, for sheet steel, non-ferrous metals and plastics.

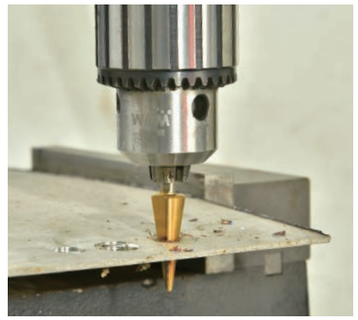

| Model | Diameter (mm) | Step Quantity | Max Drilling Thickness (mm) | Shank Type |
|---|---|---|---|---|
| AMED14-0314 | 3-14 | / | 3 | Triangular Shank |
| AMED14-0620 | 6-20 | / | 3 | Triangular Shank |

ADVANCEPOWER





## FOUR SPIRAL FLUTES STEP DRILL BIT

2X LONG LIFE · HSS · FOUR SPIRAL · STAINLESS STEEL · STEEL

Step drill, HSS, with starter point, for drilling from small to large diameters without pre-drilling in thin sheet material, burr-free thanks to chip breaker, no work-hardening, graduated in the most popular drill sizes, for steel sheet, non-ferrous metals and plastics.



| Model | Diameter (mm) | Step Quantity | Max Drilling Thickness (mm) | Shank Type |
|---|---|---|---|---|
| AMED17-0420 | 4-20 | 9 | 5 | Triangular Shank |
| AMED17-0432 | 4-32 | 15 | 5 | Triangular Shank |
| AMED17-0936 | 9-36 | 10 | 5.5 | Triangular Shank |

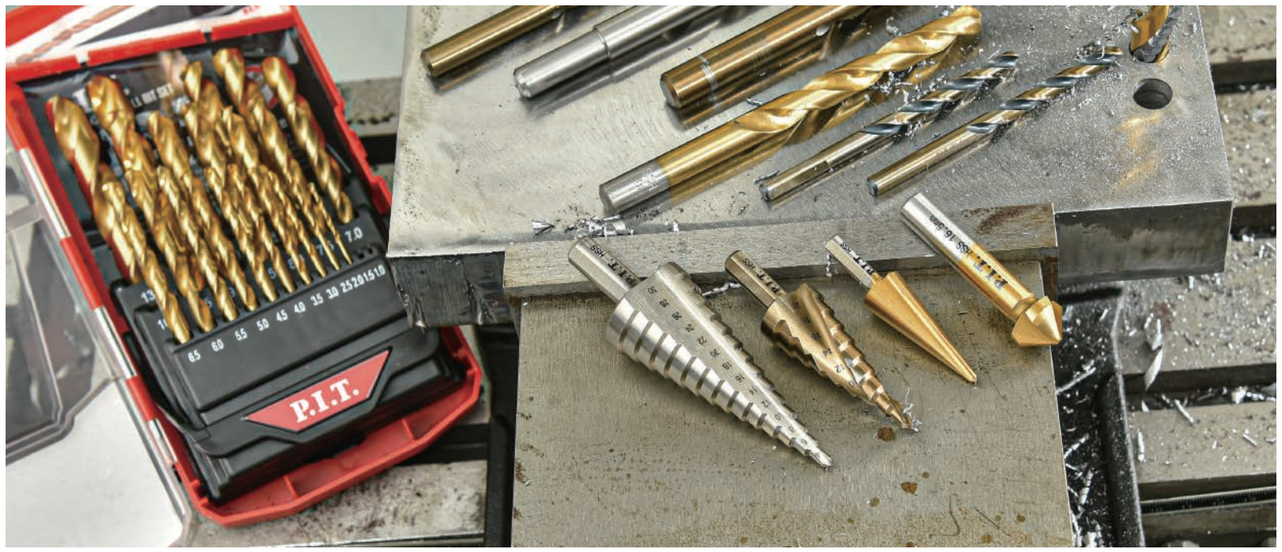



## M2 3IN1 DRILL TAP BIT

HSS M2 · 1/4" QUICK CHANGE · FULLY GROUND · 118° TOP ANGLE DRILLING · TAPPING SCREWS · CHAMFER

Because of the CBN deep-ground flutes the cutting edges are extremely sharp.Ideal for burr- and chatter-free deburring and countersinking.Best results at low cutting speeds.






| Model | Nominal Thread Size | Diamete (mm) | Pitch (mm) | Overall Length (mm) |
|---|---|---|---|---|
| AMED04-M3 | M3 | 2.5 | 0.5 | 68 |
| AMED04-M4 | M4 | 3.3 | 0.7 | 68 |
| AMED04-M5 | M5 | 4.2 | 0.8 | 68 |
| AMED04-M6 | M6 | 5.0 | 1 | 68 |
| AMED04-M8 | M8 | 6.9 | 1.25 | 68 |
| AMED04-M10 | M10 | 8.5 | 1.5 | 68 |

## 2PCS HAND TAP SET

SQUARE SHANK

Alloy steel taps offer high hardness and toughness for excellent wear resistance and are suitable for general-purpose applications. They can create new threads or repair damaged or jammed threads. Uncoated taps feature the base substrate without additional coatings and are suitable for a wide range of applications.




| Model | Nominal Thread Size (mm) | Overall Length (mm) |
|---|---|---|
| AMED06-M305 | M3 x 0.5 | 45 |
| AMED06-M407 | M4 x 0.7 | 51 |
| AMED06-M508 | M5 x 0.8 | 58 |
| AMED06-M610 | M6 x 1.0 | 61 |
| AMED06-M810 | M8 x 1.0 | 63 |
| AMED06-M8125 | M8 x 1.25 | 63 |
| AMED06-M1010 | M10 x 1.0 | 70 |
| AMED06-M10125 | M10 x 1.25 | 70 |
| AMED06-M1015 | M10 x 1.5 | 60 |
| AMED06-M12125 | M12 x 1.25 | 75 |
| AMED06-M1215 | M12 x 1.5 | 75 |
| AMED06-M12175 | M12 x 1.75 | 75 |
| AMED06-M1415 | M14 x 1.5 | 70 |
| AMED06-M1420 | M14 x 2.0 | 80 |
| AMED06-M1615 | M16 x 1.5 | 75 |
| AMED06-M1620 | M16 x 2.0 | 80 |

## METRIC DIE HAND THREAD

2.0mm TOOTH DISTANCE · 58-61 HRC

Round dies are suitable for general purpose threading. Perfect for re-threading existing threads in hard materials like metal and making new threads in soft material such as plastic.
Easy to use,The positioning groove of the die should be aligned with the fastening screw in the middle of the die wrench, and the screw should be inserted into the slot of the die and tightened.
Tips: It needs to be reversed every 1/4~1/2 turn to facilitate the chip discharge from the chip hole. Suitable lubricating oil should be added to the cutting edge of the die when tapping the thread.







| Model | Nominal Thread Size (mm) |
|---|---|
| AMED07-M305 | M3 x 0.5 |
| AMED07-M407 | M4 x 0.7 |
| AMED07-M508 | M5 x 0.8 |
| AMED07-M610 | M6 x 1.0 |
| AMED07-M810 | M8 x 1.0 |
| AMED07-M8125 | M8 x 1.25 |
| AMED07-M1010 | M10 x 1.0 |
| AMED07-M10125 | M10 x 1.25 |
| AMED07-M1015 | M10 x 1.5 |
| AMED07-M12125 | M12 x 1.25 |
| AMED07-M1215 | M12 x 1.5 |
| AMED07-M12175 | M12 x 1.75 |
| AMED07-M1415 | M14 x 1.5 |
| AMED07-M1420 | M14 x 2.0 |
| AMED07-M1615 | M16 x 1.5 |
| AMED07-M1620 | M16 x 2.0 |

## ADJUSTABLE TAP HANDLE





Ideal for thread-cutting in inaccessible places.
With two-jaw chuck for tensioning square shanks.
With steel handles one of which can be unscrewed.

| Model | For Hand Tape Size |
|---|---|
| AMED06-0312 | M3-M12 |
| AMED06-0620 | M6-M20 |
| AMED06-0625 | M6-M25 |

## DIE STOCK HANDLE

FIRMLY CLAMP

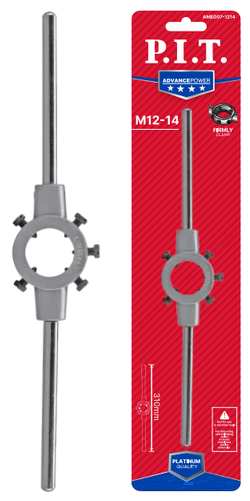


With steel handles one of which can be unscrewed and five screws for clamping the tap,die-cast zinc housing

| Model | For Hand Tap Size (mm) |
|---|---|
| AMED07-0306 | M3-M6(20x7) |
| AMED07-0008 | M8(25x9) |
| AMED07-1214 | M12-M14(38x14) |
| AMED07-1620 | M16-M20(45x18) |
| AMED07-1624 | M16-M24(55x22) |

## TAP&DIE SET



ASET09-015A



ASET09-0024



ASET09-0032



ASET09-016B

A complete set for professional craftsmen. The tap and die set is designed for thread cutting. All cutting teeth are precisely CNC-machined and properly heat-treated to achieve a Rockwell hardness of up to 60 HRC for reliable threading performance. Ideal for creating new threads or repairing damaged threads in carbon steel, cast iron, aluminum, brass, copper, and stainless steel. Taps are used for internal threads, while dies are used for external threads.

| Model | Product Name | Size(mm) | Material |
|---|---|---|---|
| ASET09-015A | 15pcs Tap Drill Set | TAPS 7PCS:<br>M3x0.5, M4x0.7, M5x0.8, M6x1.0, M8x1.25,<br>M10x1.5, M12x1.75.<br>HSS DRILLS 7PCS: 2.5, 3.3, 4.2, 5.0, 6.8, 8.5, 10.2.<br>1PC Tap wrench. | Twist drills :<br>HSS 4241<br>Hand tap:<br>Alloy Steel |
| ASET09-0024 | 24pcs Tap Die Set | DIES 11PCS IN FOLLOWING SIZES:<br>M5x0.8, M5x0.9, M6x1.0, M6x0.75, M8x1.25, M8x1.0, M10x1.5, M10x1.25,<br>M12x1.75, M12x1.5, M1/8NPT27.<br>TAPS 11PCS<br>M5x0.8, M5x0.9, M6x1.0, M6x0.75, M8x1.25, M8x1.0, M10x1.5, M10x1.25,<br>M12x1.75, M12x1.5, M1/8NPT27.<br>1PC die handle, 1PC Tap wrench | Alloy Steel |
| ASET09-0032 | 32pcs Tap Die Set | DIES 7PCS:<br>M3x0.5, M4x0.7, M5x0.8, M6x1.0, M8x1.25, M10x1.5, M12x1.75.<br>TAPER 7PCS:<br>M3x0.5, M4x0.7, M5x0.8, M6x1.0, M8x1.25, M10x1.5, M12x1.75.<br>PLUG 7PCS:<br>M3x0.5, M4x0.7, M5x0.8, M6x1.0, M8x1.25, M10x1.5, M12x1.75.<br>BOTTOMING 7PCS:<br>M3x0.5, M4x0.7, M5x0.8, M6x1.0, M8x1.25, M10x1.5, M12x1.75.<br>1PC die handle, 1PC tap wrench, 1PC screw pitch gauge, 1PC screw driver | Alloy Steel |
| ASET09-016B | 16pcs Tap Die Set | HEX DIES 7PCS IN FOLLOWING SIZES:<br>M3x0.5, M4x0.7, M5x0.8, M6x1.0, M8x1.25, M10x1.5, M12x1.75<br>TAPS 7PCS:<br>M3x0.5, M4x0.7, M5x0.8, M6x1.0, M8x1.25, M10x1.5, M12x1.75<br>1PC die handle, 1PC tap wrench | Alloy Steel |






## 15PCS PTA MIXED SET

The boxes and accessory sets also provide DIY enthusiasts with a proper place to store their accessories once their work is done.
A comprehensive range of standard-size metal and masonry drill bits.

| Model | ASET05-015A | | | |
|---|---|---|---|---|
| Sizes(mm) | 2x49mm M2 HSS Drill bit | 1pc | 6.0x100mm 40Cr Masonry drill bit | 1pc |
| | 3x61mm M2 HSS Drill bit | 1pc | 8.0x120mm 40Cr Masonry drill bit | 1pc |
| | 4x75mm M2 HSS Drill bit | 1pc | 60mm Inox Bit Holder | 1pc |
| | 6x93mm M2 HSS Drill bit | 1pc | PH1 25mm screwdriver bit | 1pc |
| | 8x117mm M2 HSS Drill bit | 1pc | PH2 25mm screwdriver bit | 1pc |
| | 5x85mm 40Cr Masonry drill bit | 1pc | PH3 25mm screwdriver bit | 1pc |
| | 6x100mm 40Cr Masonry drill bit | 1pc | | 1pc |
| Material | HSS / YG8 / 40CR / S2 | | | |
| Pack Quantity | 15pcs | | | |
| Packaging | Plastic Box | | | |

## 5PCS M35 HEX SHANK SMART STEP TWIST DRILL BITS



The boxes and accessory sets also provide DIY enthusiasts with a proper place to store their accessories once their work is done.
A comprehensive range of standard-size metal and masonry drill bits.

| Model | ASET01-005A |
|---|---|
| Sizes(mm) | smart step twist drill bits |
| | 4.0×70mm 5.0×73mm |
| | 6.0×80mm 8.0×101mm 10.0×101mm |
| Material | M35 |
| Surface Treatment | Titanium Plating + Color Ring |
| Pack Quantity | 5PCS |
| Packaging | Plastic Box + Label + Double Blister |









## WOOD DRILL BIT

HCS · CROWN · WOOD

Made of high-quality cemented carbide with special heat treatment for a sharp cutting edge, high hardness, and long service life. Suitable for precise drilling in wood, plastic, plywood, gypsum board, and similar materials. Ideal for hinge installation, woodworking, maintenance, model making, and furniture installation. Suitable for standard drills, bench drills, vertical drilling machines, and handheld electric drills.

| Model | Diameter (mm) | Overall Length (mm) | Work Length (mm) | Type | Shank Type |
|---|---|---|---|---|---|
| AWOD01-0003 | 3 | 61 | 33 | Double-flute | Round Shank |
| AWOD01-0004 | 4 | 75 | 43 | Double-flute | Round Shank |
| AWOD01-0005 | 5 | 86 | 53 | Double-flute | Round Shank |
| AWOD01-0006 | 6 | 93 | 57 | Double-flute | Round Shank |
| AWOD01-0007 | 7 | 109 | 69 | Double-flute | Round Shank |
| AWOD01-0008 | 8 | 117 | 75 | Double-flute | Round Shank |
| AWOD01-0009 | 9 | 120 | 80 | Double-flute | Round Shank |
| AWOD01-0010 | 10 | 133 | 87 | Double-flute | Round Shank |
| AWOD01-0011 | 11 | 142 | 94 | Double-flute | Round Shank |
| AWOD01-0012 | 12 | 151 | 101 | Double-flute | Round Shank |
| AWOD01-0013 | 13 | 151 | 101 | Double-flute | Round Shank |






## CARBIDE FORSTNER BIT

YG8 CARBIDE · WOOD

For Wood, plastic, plywood, gypsum board and other materials you need to exquisite perforation.

| Model | Diameter (mm) | Overall Length (mm) | Shank Diameter (mm) | Milddle Shank Diameter (mm) |
|---|---|---|---|---|
| AWOD02-0015 | 15 | 88 | 8 | 10 |
| AWOD02-0020 | 20 | 88 | 8 | 10 |
| AWOD02-0022 | 22 | 88 | 8 | 10 |
| AWOD02-0025 | 25 | 88 | 10 | 12 |
| AWOD02-0030 | 30 | 88 | 10 | 12 |
| AWOD02-0032 | 32 | 88 | 10 | 12 |
| AWOD02-0035 | 35 | 88 | 10 | 12 |
| AWOD02-0040 | 40 | 88 | 10 | 14 |
| AWOD02-0045 | 45 | 88 | 10 | 14 |
| AWOD02-0050 | 50 | 88 | 10 | 14 |




## FOUR-FLUTE AUGER BIT

HCS · WOOD

For accurate drilling in wooden beams and roof timbers, industrial quality for use in joinery, roofing and related trades.

| Model | Diameter (mm) | Work Length (mm) | Overall Length (mm) | Shank Type |
|---|---|---|---|---|
| AWOD03-1610A | 10 | 70 | 165 | 1/4 |
| AWOD03-1612A | 12 | 70 | 165 | 1/4 |
| AWOD03-1614A | 14 | 70 | 165 | 1/4 |
| AWOD03-1616A | 16 | 70 | 165 | 1/4 |
| AWOD03-1618A | 18 | 70 | 165 | 1/4 |
| AWOD03-1620A | 20 | 70 | 165 | 1/4 |
| AWOD03-1622A | 22 | 70 | 165 | 1/4 |
| AWOD03-1625A | 25 | 70 | 165 | 1/4 |
| AWOD03-1628A | 28 | 70 | 165 | 1/4 |
| AWOD03-1630A | 30 | 70 | 165 | 1/4 |
| AWOD03-1632A | 32 | 70 | 165 | 1/4 |
| AWOD03-1635A | 35 | 70 | 165 | 1/4 |




## 6PCS FLAT WOOD DRILL BIT

HCS · WOOD

| Model | Diameter (mm) | Overall Length (mm) | Shank Diameter (mm) |
|---|---|---|---|
| ASET15-0006 | 10 | 152 | 1/4 |
| | 12 | 152 | 1/4 |
| | 18 | 152 | 1/4 |
| | 16 | 152 | 1/4 |
| | 20 | 152 | 1/4 |
| | 25 | 152 | 1/4 |

ADVANCEPOWER




## FLAT WOOD DRILL BIT

HCS

Flat wood bit, for woodworking, 1/4" hexagon shank to ISO 1173, E 6.3, with centre point and two cutting wings, special cutting geometry, precision ground, for safe and accurate drilling, grey colour, sandblasted, precise holes with low effort, for soft- and hardwoods,lightweight building materials.

| Model | Diameter (mm) | Overall Length (mm) |
|---|---|---|
| AWOD04-0006 | 6 | 152 |
| AWOD04-0008 | 8 | 152 |
| AWOD04-0010 | 10 | 152 |
| AWOD04-0012 | 12 | 152 |
| AWOD04-0014 | 14 | 152 |
| AWOD04-0016 | 16 | 152 |
| AWOD04-0018 | 18 | 152 |
| AWOD04-0020 | 20 | 152 |
| AWOD04-0022 | 22 | 152 |
| AWOD04-0024 | 24 | 152 |
| AWOD04-0025 | 25 | 152 |
| AWOD04-0028 | 28 | 152 |
| AWOD04-0030 | 30 | 152 |
| AWOD04-0032 | 32 | 152 |
| AWOD04-0035 | 35 | 152 |
| AWOD04-0036 | 36 | 152 |
| AWOD04-0038 | 38 | 152 |
| AWOD04-0040 | 40 | 152 |

ADVANCEPOWER

## HOLE SAW KIT

HCS



AWOD05-0007 AWOD05-0008



AWOD05-0011 AWOD05-0015


Carbon Steel, Heat Treated. High strength and hardness, design for increased durability and outstanding cutting performance. High precision, smooth cutting edge. Super sharp saw teeth have been designed to cut faster, no material get stuck makes work faster and better finished.
Suitable for soft wood, plywood, oak, thin PVC board, plastic,drywall but not metal, great for tasks including cutting holes in desk surfaces, doors, furniture and cabinets. Serve for fitting handles and locks for furniture.

| Model | Product Name | Size (mm) |
|---|---|---|
| AWOD05-0007 | 7pcs Hole Saw Kit | 64-76-89-102-127 |
| AWOD05-0008 | 8pcs Hole Saw Kit | 51-57-67-76-89-102 |
| AWOD05-0011 | 11pcs Hole Saw Kit | 19-22-29-32-38-44-51-64 |
| AWOD05-0015 | 15pcs Hole Saw Kit | 19-22-28-32-38-44-51-64-76-89-102-127 |

ADVANCEPOWER




## 3PCS WOOD DOOR LOCK INSTALLATION HOLE SAW KIT



P.I.T. installation kit, includes: positioning template, drill guide, Hole Saw blade for fast cuts in hard woods, suitable for use with: wood doors.




| Model | Size (mm) |
|---|---|
| AWOD05-003A | Hole Saw: 48, Flat Wood Drill Bit: 22 |
| AWOD05-003B | Hole Saw: 54, Flat Wood Drill Bit: 22 |

CONTROLPOWER




## ADJUSTABLE CIRCLE HOLE SAW CUTTER SET

COMPOSITE BOARD BLOCK BOARD PLASTER BOARD

High quality alloy steel and HSS, sharp and durable to use. Can be used again after grinding.
The alloy steel body features marked graduations on the beam for fast measurement and application.The hole diameter can be adjusted by the distance from the drill bit tip to the center.
Hole diameter range: 40-120mm/ 40-200mm.
Ideal for drilling of woodworking work,laminates,plastic,acrylic,plywood,composite,plaster, rubber,and cardboard.
Please apply only to thin boards.

| Model | Size (mm) | Cutting Depth (mm) | Shank Diameter (mm) |
|---|---|---|---|
| AWOD06-0120 | 40-120 | 50-60 | 10 |

ADVANCEPOWER



## HOLE SAW SET

65Mn

30 mm 0.75 mm

Hole Saw Set, heavy zinc alloy arbor, hardened spring steel teeth, teeth induction hardened, for use in wood,laminated boards, hardwoods, blockboard, plasterboard, lightweight building materials and plastics.



| Model | Product Name | Size (mm) | Drilling Depth (mm) |
|---|---|---|---|
| AWOD07-007A | 7pcs Hole Saw Set | 26-32-38-45-50-56-63 | 18 |
| AWOD07-007B | 7pcs Hole Saw Set | 26-32-38- 45-50-56-63 | 42 |
| AWOD07-0005 | 5pcs Hole Saw Set | 60-67-74-81-95 | 30 |

ADVANCEPOWER




## COUNTERSINK WOOD DRILL BIT

C45

High Carbon Steel Material. High hardness, offer superior cutting power and durable.
Quickly and accurately drill a smooth hole.Better in CENTERING and NO SKID. chamfer design will fast discharge chips from the hole on both sides automatically.
Easy to use the combination of Hex Key to adjust or disassemble the countersink drill bit and the five-flutes chamfering.
Suitable for bench drill, hand drill and conventional electric drill. Perfect for wood, fiberboard, particleboard, plywood, plastic, PVC,

| Model | Size (mm) | Overall length (mm) |
|---|---|---|
| AWOD08-0550 | 5x50 | 75 |
| AWOD08-0750 | 7x50 | 86 |
| AWOD08-0770 | 7x70 | 120 |

DRUAPOWER




## 8PCS WOOD DRILL BIT SET

Wood drill bits, accurately formed, 2-phase spirals for concentric running, chemical black, ground spirals, with centre point and shoulder cutter, for accurate break-out free holes, round shank, industrial quality, for soft- and hardwoods.

| Model | ASET02-008A |
|---|---|
| Sizes(mm) | (3 /4 /5 /6 /7 /8 /9 /10)mm |
| Material | HCS |
| Pack Quantity | 8pcs |
| Packaging | Plastic Box |

## V TILE&GLASS DRILL BIT




DRY CUT

WET CUT

2X LONG LIFE

| Model | Diameter (mm) | Overall Length (mm) | Shank Type |
|---|---|---|---|
| AMAS11-003V | 3 | 70 | Round Shank |
| AMAS11-004V | 4 | 70 | Round Shank |
| AMAS11-005V | 5 | 70 | Round Shank |
| AMAS11-006V | 6 | 80 | Round Shank |
| AMAS11-008V | 8 | 80 | Round Shank |
| AMAS11-010V | 10 | 90 | Round Shank |
| AMAS11-012V | 12 | 90 | Round Shank |

## 4 POWER TILE&GLASS DRILL BIT




DRY CUT

WET CUT

2X LONG LIFE | 1/4" QUICK CHANGE | BLOCKBOARD

| Model | Diameter (mm) | Overall Length (mm) | Shank Type |
|---|---|---|---|
| AMAS11-003P | 3 | 65 | 1/4" Quick Change Shank |
| AMAS11-004P | 4 | 70 | 1/4" Quick Change Shank |
| AMAS11-005P | 5 | 75 | 1/4" Quick Change Shank |
| AMAS11-006P | 6 | 80 | 1/4" Quick Change Shank |
| AMAS11-008P | 8 | 85 | 1/4" Quick Change Shank |
| AMAS11-010P | 10 | 90 | 1/4" Quick Change Shank |
| AMAS11-012P | 12 | 95 | 1/4" Quick Change Shank |

## GLASS & TILE DRILL BIT




DRY CUT

WET CUT

2X LONG LIFE | 1/4" QUICK CHANGE | BLOCKBOARD

| Model | Diameter (mm) | Overall Length (mm) | Shank Type |
|---|---|---|---|
| AMAS13-004S | 4 | 73 | 1/4" Quick Change Shank |
| AMAS13-005S | 5 | 74 | 1/4" Quick Change Shank |
| AMAS13-006S | 6 | 77 | 1/4" Quick Change Shank |
| AMAS13-008S | 8 | 78 | 1/4" Quick Change Shank |
| AMAS13-010S | 10 | 82 | 1/4" Quick Change Shank |
| AMAS13-012S | 12 | 86 | 1/4" Quick Change Shank |

## ULTIMATE CUT HARD CERAMIC PORCELAIN TILE DRILL BIT




DRY CUT

WET CUT

2X LONG LIFE | CARBIDE TECHNOLOGY | 1/4" QUICK CHANGE | BLOCKBOARD

| Model | Diameter (mm) | Overall Length (mm) | Shank Type |
|---|---|---|---|
| AMAS13-004SA | 4 | 91 | 1/4" Quick Change Shank |
| AMAS13-005SA | 5 | 91 | 1/4" Quick Change Shank |
| AMAS13-006SA | 6 | 91 | 1/4" Quick Change Shank |
| AMAS13-008SA | 8 | 92 | 1/4" Quick Change Shank |
| AMAS13-010SA | 10 | 94 | 1/4" Quick Change Shank |
| AMAS13-012SA | 12 | 94 | 1/4" Quick Change Shank |

## HEX SHANK VACUUM BRAZED DIAMOND DRY DRILL BIT




2X LONG LIFE | VACUUM BRAZING TECHNOLOGY | DRY CUT | WET CUT

The Vacuum Brazed Diamond Hole Saws for drilling holes in hard materials such as Granite, Porcelain, Tile, Ceramic, Marble, Stone, Glass, Brick.
These Dry Diamond Core Drill Bits Built with 1/4" Hex Shank compatible with most hand-held drill, drill press and any other tools with chucks that accepts 1/4" Hex Shank bits.

| Model | Diameter (mm) | Overall Length (mm) |
|---|---|---|
| AMAS17-0006 | 6 | 80 |
| AMAS17-0008 | 8 | 80 |
| AMAS17-0010 | 10 | 80 |
| AMAS17-0012 | 12 | 80 |
| AMAS17-0014 | 14 | 80 |
| AMAS17-0016 | 16 | 80 |

## VACUUM BRAZED DIAMOND DRY DRILL BIT ,FOR ANGLE GRINDER







2X LONG LIFE | VACUUM BRAZING TECHNOLOGY | DRY CUT | WET CUT

Diamond core bits are worked great for dry drilling holes through porcelain tile, ceramics, bathroom tile,marble granite,stone,masonry, brick with ease,Using water could prolong the lifetime.
Using vacuum brazed technology ,which increases resistance to temperature and friction,to make the diamond particles better attach to the core steel,imporve the performance and lifetime.Constructed with high grade diamond grit for effortless cutting and improved durability in tough applications.
Special U-groove tooth shape and chip removal design of the tile hole cutter creates a high sharpness, you could drill smoothly with no broken edges Suitable for angle grinders.

| Model | Diameter (mm) | Overall Length (mm) |
|---|---|---|
| AMAS18-0006 | 6 | 60 |
| AMAS18-0008 | 8 | 60 |
| AMAS18-0010 | 10 | 60 |
| AMAS18-0012 | 12 | 60 |
| AMAS18-0014 | 14 | 60 |
| AMAS18-0016 | 16 | 60 |
| AMAS18-0018 | 18 | 60 |
| AMAS18-0020 | 20 | 60 |
| AMAS18-0022 | 22 | 60 |
| AMAS18-0025 | 25 | 60 |
| AMAS18-0028 | 28 | 60 |
| AMAS18-0030 | 30 | 60 |
| AMAS18-0032 | 32 | 60 |
| AMAS18-0035 | 35 | 60 |
| AMAS18-0038 | 38 | 60 |
| AMAS18-0040 | 40 | 60 |
| AMAS18-0045 | 45 | 60 |
| AMAS18-0050 | 50 | 60 |
| AMAS18-0055 | 55 | 60 |
| AMAS18-0060 | 60 | 60 |
| AMAS18-0065 | 65 | 60 |
| AMAS18-0068 | 68 | 60 |
| AMAS18-0070 | 70 | 60 |
| AMAS18-0075 | 75 | 60 |




DRUAPOWER

## DIAMOND TILE AND CERAMICS HOLE SAW

2X LONG LIFE · VACUUM BRAZING TECHNOLOGY · WET CUT · DRY CUT · BLOCKBOARD







Diamond particle coated holesaws, high-quality industrial diamond, for use even on the hardest tiles, unitary body construction, accurate, highly concentric, for porcelain, granite worktops, tiles, quarry tiles, ceramics, naturalstone slabs, marble.
Attention: Tubular Drill with a diameter of 6-12mm do not have a pilot drill, Bits with diameters 16-75mm have a solid carbide pilot Drill on tiles for Drilling soft ceramics and facing tiles without a conductor. When Drilling for porcelain stoneware, the guide drill must be removed using a conductor or Drilling at an angle. Working in impact mode without water cooling is forbidden.

| Model | Diameter (mm) | Overall Length (mm) | Shank Type | Type |
|---|---|---|---|---|
| AMAS12-0006 | 6 | 65 | Triangular Shank | No Pilot Drill |
| AMAS12-0008 | 8 | 65 | Triangular Shank | No Pilot Drill |
| AMAS12-0010 | 10 | 65 | Triangular Shank | No Pilot Drill |
| AMAS12-0012 | 12 | 65 | Triangular Shank | No Pilot Drill |
| AMAS12-0016 | 16 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0018 | 18 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0020 | 20 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0022 | 22 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0025 | 25 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0028 | 28 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0030 | 30 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0032 | 32 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0035 | 35 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0038 | 38 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0040 | 40 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0042 | 42 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0045 | 45 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0050 | 50 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0055 | 55 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0060 | 60 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0065 | 65 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0068 | 68 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0070 | 70 | 70 | Triangular Shank | With Pilot Drill |
| AMAS12-0075 | 75 | 70 | Triangular Shank | With Pilot Drill |

ADVANCEPOWER




## 4PCS TUNGSTEN CARBIDE GRIT HOLE SAW SET

2X LONG LIFE · SELF SHARPENING · MAX RPM 1500 · DRY CUT · WET CUT

| Model | Product Name | Diameter (mm) | Overall Length (mm) |
|---|---|---|---|
| AMAS07-04PC | 4pcs Tungsten Carbide Grit Hole Saw Setl | 33-53-67-73 | 58 |

ADVANCEPOWER




## TILE FILE

In addition to working on all types of tile, it also Smooths other substrates including fiberglass, laminate flooring, cement board and carbon fiber .High quality diamond bond strength maintains a tough grit surface for working with the hardest materials unique molded handle has been created for comfort and durability .high quality diamond grit coating is long-lasting and will not chip.



| Model | Diameter (mm) | Overall Length (mm) |
|---|---|---|
| AMAS07-F150 | 150 | 255 |

ADVANCEPOWER




## SEAM CLEANING KNIFE

YG8 CUTTER HEAD

This grout removal tool is specifically made to clean out and remove old dirty pitted grout so you can put new grout into for a cleaner look. Specially angled handle, and the specially designed blades make this otherwise difficult job much easier.
The blade attaches to the saw with two screws, and is easily replaceable. Blades have a gritty surface to help you scrub away the old grout thoroughly.
Measuring 200mm long, easy to grip for scrubbing action, specially angled handle helps get into the grout area.Affordable and portable, it delivers remarkable results.



| Model | Diameter (mm) | Overall Length (mm) |
|---|---|---|
| AMAS07-S200 | 50 | 200 |



## CONSTRUCTION BROKEN Chisel | Pickaxe | Drilling Masonry













## SDS PLUS MASONRY DRILL BIT






Longer service life in concrete and with reinforcement thanks to the stabilised head geometry and rounded cutting edges. Fields of application: for granite, concrete, concrete reinforcement, clinker, stone, brickwork and marble. In all hammer drills with SDS-Plus adaptor and two-groove adaptor .

| Model | Diameter (mm) | Overall Length (mm) |
|---|---|---|
| AMAS01-0511 | 5 | 110 |
| AMAS01-0516 | 5 | 160 |
| AMAS01-0611 | 6 | 110 |
| AMAS01-0616 | 6 | 160 |
| AMAS01-0621 | 6 | 210 |
| AMAS01-0631 | 6 | 310 |
| AMAS01-0816 | 8 | 160 |
| AMAS01-0821 | 8 | 210 |
| AMAS01-0826 | 8 | 260 |
| AMAS01-0831 | 8 | 310 |
| AMAS01-1016 | 10 | 160 |
| AMAS01-1021 | 10 | 210 |
| AMAS01-1031 | 10 | 310 |
| AMAS01-1045 | 10 | 450 |
| AMAS01-1216 | 12 | 160 |

| Model | Diameter (mm) | Overall Length (mm) |
|---|---|---|
| AMAS01-1221 | 12 | 210 |
| AMAS01-1231 | 12 | 310 |
| AMAS01-1245 | 12 | 450 |
| AMAS01-1416 | 14 | 160 |
| AMAS01-1421 | 14 | 210 |
| AMAS01-1431 | 14 | 310 |
| AMAS01-1445 | 14 | 450 |
| AMAS01-1616 | 16 | 160 |
| AMAS01-1621 | 16 | 210 |
| AMAS01-1631 | 16 | 310 |
| AMAS01-1645 | 16 | 450 |
| AMAS01-1831 | 18 | 310 |
| AMAS01-1845 | 18 | 450 |
| AMAS01-2045 | 20 | 450 |
| AMAS01-2245 | 22 | 450 |



| Model | Diameter (mm) | Overall Length (mm) |
|---|---|---|
| AMAS01-0511P | 5 | 110 |
| AMAS01-0516P | 5 | 160 |
| AMAS01-05516P | 5.5 | 160 |
| AMAS01-0611P | 6 | 110 |
| AMAS01-0616P | 6 | 160 |
| AMAS01-0621P | 6 | 210 |
| AMAS01-0626P | 6 | 260 |
| AMAS01-0631P | 6 | 310 |
| AMAS01-06516P | 6.5 | 160 |
| AMAS01-0811P | 8 | 110 |
| AMAS01-0816P | 8 | 160 |
| AMAS01-0821P | 8 | 210 |
| AMAS01-0826P | 8 | 260 |
| AMAS01-0831P | 8 | 310 |
| AMAS01-0835P | 8 | 350 |
| AMAS01-0841P | 8 | 410 |
| AMAS01-08516P | 8.5 | 160 |
| AMAS01-1011P | 10 | 110 |
| AMAS01-1016P | 10 | 160 |
| AMAS01-1021P | 10 | 210 |
| AMAS01-1026P | 10 | 260 |
| AMAS01-1031P | 10 | 310 |
| AMAS01-1035P | 10 | 350 |
| AMAS01-1041P | 10 | 410 |
| AMAS01-1216P | 12 | 160 |
| AMAS01-1221P | 12 | 210 |
| AMAS01-1226P | 12 | 260 |
| AMAS01-1231P | 12 | 310 |
| AMAS01-1235P | 12 | 350 |
| AMAS01-1241P | 12 | 410 |
| AMAS01-1416P | 14 | 160 |
| AMAS01-1421P | 14 | 210 |
| AMAS01-1426P | 14 | 260 |

| Model | Diameter (mm) | Overall Length (mm) |
|---|---|---|
| AMAS01-1431P | 14 | 310 |
| AMAS01-1435P | 14 | 350 |
| AMAS01-1441P | 14 | 410 |
| AMAS01-1480P | 14 | 800 |
| AMAS01-14100P | 14 | 1000 |
| AMAS01-1616P | 16 | 160 |
| AMAS01-1621P | 16 | 210 |
| AMAS01-1626P | 16 | 260 |
| AMAS01-1631P | 16 | 310 |
| AMAS01-16100P | 16 | 1000 |
| AMAS01-1846P | 18 | 460 |
| AMAS01-1880P | 18 | 800 |
| AMAS01-2080P | 20 | 800 |
| AMAS01-20100P | 22 | 1000 |
| AMAS01-2280P | 22 | 800 |
| AMAS01-22100P | 24 | 1000 |
| AMAS01-2446P | 24 | 460 |
| AMAS01-2460P | 24 | 600 |
| AMAS01-2480P | 24 | 800 |
| AMAS01-26100P | 26 | 1000 |
| AMAS01-2646P | 26 | 460 |
| AMAS01-2660P | 26 | 600 |
| AMAS01-2680P | 26 | 800 |
| AMAS01-2880P | 28 | 800 |
| AMAS01-28100P | 28 | 1000 |
| AMAS01-3046P | 30 | 460 |
| AMAS01-3060P | 30 | 600 |
| AMAS01-3080P | 30 | 800 |
| AMAS01-30100P | 30 | 1000 |
| AMAS01-3246P | 32 | 460 |
| AMAS01-3260P | 32 | 600 |
| AMAS01-3280P | 32 | 800 |
| AMAS01-32100P | 32 | 1000 |








## SDS - MAX MASONRY DRILL BIT

2X LONG LIFE · SDS MAX · 40Cr

3D cutting edge profile in "┼"-shape for exact positioning and ideal starting; long service life and low probability of breakage, even upon impact with reinforcements thanks to the highly effective technique of hardening by blasting; high drilling speed due to wide spirals; vibration-optimised drilling performance.

| Model | Diameter (mm) | Overall Length (mm) |
|---|---|---|
| AMAS02-1234 | 12 | 340 |
| AMAS02-1254 | 12 | 540 |
| AMAS02-1434 | 14 | 340 |
| AMAS02-1454 | 14 | 540 |
| AMAS02-1634 | 16 | 340 |
| AMAS02-1654 | 16 | 540 |
| AMAS02-1834 | 18 | 340 |
| AMAS02-1854 | 18 | 540 |
| AMAS02-2034 | 20 | 340 |
| AMAS02-2054 | 20 | 540 |
| AMAS02-2252 | 22 | 520 |
| AMAS02-2554 | 25 | 540 |
| AMAS02-2854 | 28 | 540 |
| AMAS02-3054 | 30 | 540 |
| AMAS02-3254 | 32 | 540 |
| AMAS02-3554 | 35 | 540 |
| AMAS02-3854 | 38 | 540 |




## MASONRY DRILL BITS

YG8 TUNGSTEN CARBIDE TIPPED

Concrete and masonry drills, to ISO 5468, tungsten carbide tipped, high temperature brazed, laterally and vertically secured TC plates, chip removing, asymmetrical profile spiral for optimal waste removal, hammer resistant high performance drill bits for all rotary and impact drills. for granite, concrete, masonry,natural and reconstituted stone, limestone.

| Model | Diameter (mm) | Work Length (mm) | Overall Length (mm) | Shank Type |
|---|---|---|---|---|
| AMAS05-0005 | 5 | 50 | 85 | Round Shank |
| AMAS05-0006 | 6 | 60 | 100 | Round Shank |
| AMAS05-0008 | 8 | 80 | 120 | Round Shank |
| AMAS05-0010 | 10 | 80 | 120 | Round Shank |
| AMAS05-0012 | 12 | 90 | 150 | Round Shank |




## EASY CUT MULTI-MATERIAL DRILL BITS

In accordance with ISO 5468, diamond-cut special carbide cutting edge with a high of wolfram carbide content and a homogenous, fine-grained structure, tip angle 120 deg., asymmetrically shaped drill spiral for optimal transport of dry drill cuttings, drill bit with high contact pressure and a recommended rotational speed of 800 - 1,000 rpm without impact, suitable for battery-powered and wired machines, colour red, specialist for the hardest stones such as granite, gneiss, slate, basalt, concrete, but can also be used for glass, ceramics, roof tiles, and other hard materials.

| Model | Diameter (mm) | Work Length (mm) | Overall Length (mm) | Shank Type |
|---|---|---|---|---|
| AMAS06-0006 | 6 | 60 | 102 | Triangular Shank |
| AMAS06-0008 | 8 | 68 | 113 | Triangular Shank |
| AMAS06-0010 | 10 | 75 | 122 | Triangular Shank |
| AMAS06-0012 | 12 | 78 | 124 | Triangular Shank |



ADVANCEPOWER

## HOLE CORE DRILL BIT

SDS PLUS




Tungsten carbide tipped hollow core drills, impact resistant, specially hardened, special brazed heat resistant carbide plates, for use in masonry, stone, reconstituted stone, concrete, marble, brick, for fitting electrical sockets and waste pipes.

| Model | Diameter (mm) | Work Length (mm) | Overall Length (mm) | Thread |
|---|---|---|---|---|
| AMAS03-0065 | 65 | 50.5 | 72 | M22x2.0 |
| AMAS03-0068 | 68 | 50.5 | 72 | M22x2.0 |
| AMAS03-0072 | 72 | 50.5 | 72 | M22x2.0 |
| AMAS03-0080 | 80 | 50.5 | 72 | M22x2.0 |

ADVANCEPOWER

## SDS PLUS ADAPTER

Tungsten carbide tipped hollow core drills, impact resistant, specially hardened, specially brazed heat resistant carbide plates, for use in masonry, stone, reconstituted stone, concrete, marble and brick, for fitting electrical sockets and waste pipes.




AMAS03-0300P




AMAS03-0300M

| Model | Product Name | Diameter (mm) | Work Length (mm) | Overall Length (mm) | Thread |
|---|---|---|---|---|---|
| AMAS03-0300P | SDS Plus Adapter | / | 50.5 | 300 | M22x2.0 |
| AMAS03-0300M | SDS Max Adapter | / | 50.5 | 300 | M22x2.0 |



DRUAPOWER







## MULTI-PURPOSES CARBIDE HOLE SAW

5X LONG LIFE SDS PLUS YG11X

Large carbides and aggressive tooth design cuts through material faster for rough-in applications
High performance carbides are brazed to the cutting edge for durability and to help prevent tooth loss when hitting nails or drilling through abrasive materials
Carbide teeth are optimized to cut through a variety of materials including Nail Embedded Wood, Concrete Block, Fiber Cement, and Brick. Deep body slots allow for easy plug removal

| Model | Diameter (mm) | Imperial (in) | Cutting Depth (mm) |
|---|---|---|---|
| AMED13-0022 | 22 | 7/8" | 60 |
| AMED13-0025 | 25 | 1" | 60 |
| AMED13-0030 | 30 | 1-3/16" | 60 |
| AMED13-0035 | 35 | 1-3/8" | 60 |
| AMED13-0040 | 40 | 1-9/16" | 60 |
| AMED13-0045 | 45 | 1-25/32" | 60 |
| AMED13-0050 | 50 | 1-31/32" | 60 |
| AMED13-0055 | 55 | 2-11/64" | 60 |
| AMED13-0057 | 57 | 2-1/4" | 60 |
| AMED13-0060 | 60 | 2-3/8" | 60 |
| AMED13-0065 | 65 | 2-9/16" | 60 |
| AMED13-0068 | 68 | 2-11/16" | 60 |
| AMED13-0070 | 70 | 2-3/4" | 60 |
| AMED13-0073 | 73 | 2-7/8" | 60 |
| AMED13-0076 | 76 | 3" | 60 |
| AMED13-0080 | 80 | 3-5/32" | 60 |
| AMED13-0085 | 85 | 3-11/32" | 60 |
| AMED13-0089 | 89 | 3-1/2" | 60 |
| AMED13-0105 | 105 | 4-1/8" | 60 |

DRUAPOWER

## SHANK HOLE SAW MANDREL

Hex and SDS plus shank arbor for use with Multi-purposes carbide hole saw.
Complete with HSS/CT pilot drill.




MED13-SDSH




AMED13-HEXH




AMED13-HEXC




AMED13-SDSC




AMED13-HDRL




AMED13-CDRL

| Model | Product Name | Thread | Overall Length (mm) | Shank Type |
|---|---|---|---|---|
| AMED13-SDSH | SDS Shank Hole Saw Mandrel | M16x2 | 142 | SDS-Plus |
| AMED13-HEXH | Hex Shank Hole Saw Mandrel | M16x2 | 142 | Hex Shank |
| AMED13-HEXC | Hex Shank Hole Saw Mandrel | M16x2 | 142 | Hex Shank |
| AMED13-SDSC | SDS Shank Hole Saw Mandrel | M16x2 | 142 | SDS-Plus |
| AMED13-HDRL | HSS Center Drill | M16x2 | 100 | Round Shank |
| AMED13-CDRL | CT Center Drill | M16x2 | 100 | Round Shank |




## SDS - PLUS CHISEL



AMAS08-0014P AMAS08-2025P AMAS08-4025P AMAS08-2225P

| Model | Size (mm) | Shank Diameter (mm) | Overall length (mm) |
|---|---|---|---|
| AMAS08-0014P | 250 | 14 | 250 |
| AMAS08-2025P | 250x20 | 14 | 250 |
| AMAS08-4025P | 250x40 | 14 | 250 |
| AMAS08-2225P | 250x22 | 14 | 250 |

## SDS - MAX POINTED CHISEL



AMAS08-0028M AMAS08-0040M AMAS08-0060M

| Model | Size (mm) | Shank Diameter (mm) | Overall length (mm) |
|---|---|---|---|
| AMAS08-0028M | 280 | 18 | 280 |
| AMAS08-0040M | 400 | 18 | 400 |
| AMAS08-0060M | 600 | 18 | 600 |

## SDS - MAX FLAT CHISEL



AMAS08-2528M AMAS08-2540M AMAS08-2560M

| Model | Size (mm) | Shank Diameter (mm) | Overall length (mm) |
|---|---|---|---|
| AMAS08-2528M | 25x280 | 18 | 280 |
| AMAS08-2540M | 25x400 | 18 | 400 |
| AMAS08-2560M | 25x600 | 18 | 600 |

## SDS - MAX SPADE CHISEL



AMAS08-5040M AMAS08-7530M

| Model | Size (mm) | Shank Diameter (mm) | Overall length (mm) |
|---|---|---|---|
| AMAS08-5040M | 50x400 | 18 | 400 |
| AMAS08-7530M | 75x300 | 18 | 300 |

## SDS - MAX SELF-SHARPING FLAT CHISEL



AMAS08-2540SM AMAS08-4035SM AMAS08-0040SM

| Model | Size (mm) | Shank Diameter (mm) | Overall length (mm) |
|---|---|---|---|
| AMAS08-2540SM | 400x25 | 18 | 400 |
| AMAS08-4035SM | 350x40 | 18 | 400 |
| AMAS08-0040SM | 400 | 18 | 400 |

## SDS - PLUS SELF-SHARPING FLAT CHISEL



| Model | Size (mm) | Shank Diameter (mm) | Overall length (mm) |
|---|---|---|---|
| AMAS08-2025SP | 250x20 | 10 | 250 |

## HEX 30MM CHISEL



AMAS09-0040 AMAS09-3540 AMAS09-7540


| Model | Size (mm) | Shank Diameter (mm) | Overall length (mm) |
|---|---|---|---|
| AMAS09-0040 | 400 | 30 | 400 |
| AMAS09-3540 | 35x400 | 30 | 400 |
| AMAS09-7540 | 75x400 | 30 | 400 |

## HEX 30MM SELF-SHARPING BULL CHISEL



| Model | Size (mm) | Shank Diameter (mm) | Overall length (mm) |
|---|---|---|---|
| AMAS09-0040S | 400 | 30 | 400 |

## HEX 28MM CHISEL

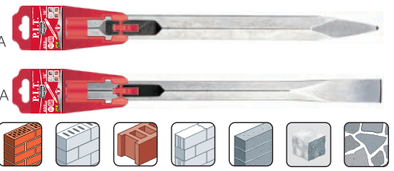

AMAS09-0040A

AMAS09-3540A

| Model | Size (mm) | Shank Diameter (mm) | Overall length (mm) |
|---|---|---|---|
| AMAS09-0040A | 400 | 30 | 400 |
| AMAS09-3540A | 35x400 | 35 | 400 |





## ACCESSORIES Fastening


























### 25MM IMPACT SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC

| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR01-25PH1 | PH1 | 25 | 3.9 | 1/4" Hex Shank |
| ASDR01-25PH2 | PH2 | 25 | 10.3 | 1/4" Hex Shank |
| ASDR01-25PH3 | PH3 | 25 | 32 | 1/4" Hex Shank |




### 25MM IMPACT SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC

| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR01-25PZ1 | PZ1 | 25 | 3.9 | 1/4" Hex Shank |
| ASDR01-25PZ2 | PZ2 | 25 | 10.3 | 1/4" Hex Shank |
| ASDR01-25PZ3 | PZ3 | 25 | 32 | 1/4" Hex Shank |




### 25MM IMPACT SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC

| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR01-25T10 | T10 | 25 | 4.52 | 1/4" Hex Shank |
| ASDR01-25T20 | T20 | 25 | 12.66 | 1/4" Hex Shank |
| ASDR01-25T25 | T25 | 25 | 18.99 | 1/4" Hex Shank |
| ASDR01-25T30 | T30 | 25 | 37.4 | 1/4" Hex Shank |
| ASDR01-25T40 | T40 | 25 | 65.08 | 1/4" Hex Shank |




### 25MM IMPACT SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC

| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR01-25H3 | H3 | 25 | 6.6 | 1/4" Hex Shank |
| ASDR01-25H4 | H4 | 25 | 16 | 1/4" Hex Shank |
| ASDR01-25H5 | H5 | 25 | 30 | 1/4" Hex Shank |
| ASDR01-25H6 | H6 | 25 | 52 | 1/4" Hex Shank |




## 50MM IMPACT SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC

| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR01-50PH1 | PH1 | 50 | 3.9 | 1/4" Hex Quick Change Shank |
| ASDR01-50PH2 | PH2 | 50 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR01-50PH3 | PH3 | 50 | 32 | 1/4" Hex Quick Change Shank |




## 50MM IMPACT SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC

| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR01-50PZ1 | PZ1 | 50 | 3.9 | 1/4" Hex Quick Change Shank |
| ASDR01-50PZ2 | PZ2 | 50 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR01-50PZ3 | PZ3 | 50 | 32 | 1/4" Hex Quick Change Shank |




## 50MM IMPACT SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC

| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR01-50T20 | T20 | 50 | 12.66 | 1/4" Hex Quick Change Shank |
| ASDR01-50T25 | T25 | 50 | 18.99 | 1/4" Hex Quick Change Shank |
| ASDR01-50T30 | T30 | 50 | 37.4 | 1/4" Hex Quick Change Shank |
| ASDR01-50T40 | T40 | 50 | 65.08 | 1/4" Hex Quick Change Shank |




## 50MM IMPACT SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC

| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR01-50H3 | H3 | 50 | 6.6 | 1/4" Hex Quick Change Shank |
| ASDR01-50H4 | H4 | 50 | 16 | 1/4" Hex Quick Change Shank |
| ASDR01-50H5 | H5 | 50 | 30 | 1/4" Hex Quick Change Shank |
| ASDR01-50H6 | H6 | 50 | 52 | 1/4" Hex Quick Change Shank |

## 70MM IMPACT SCREWDRIVER BIT

DRUAPOWER · 3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC







| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR01-70PH2 | PH2 | 70 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR01-70PZ2 | PZ2 | 70 | 10.3 | 1/4" Hex Quick Change Shank |

## 150MM IMPACT SCREWDRIVER BIT

DRUAPOWER · 3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC







| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR01-150PH2 | PH2 | 150 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR01-150PZ2 | PZ2 | 150 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR01-150T25 | T25 | 150 | 10.3 | 1/4" Hex Quick Change Shank |



## 25MM MEGA GRIP RIBS SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · MGR · MAGNETIC RING




| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR02-25PH1 | PH1 | 25 | 3.9 | 1/4" Hex Shank |
| ASDR02-25PH2 | PH2 | 25 | 10.3 | 1/4" Hex Shank |
| ASDR02-25PH3 | PH3 | 25 | 32 | 1/4" Hex Shank |

## 25MM IMPACT SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · MGR · MAGNETIC RING




| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR02-25PZ1 | PZ1 | 25 | 3.9 | 1/4" Hex Shank |
| ASDR02-25PZ2 | PZ2 | 25 | 10.3 | 1/4" Hex Shank |
| ASDR02-25PZ3 | PZ3 | 25 | 32 | 1/4" Hex Shank |

## 50MM MEGA GRIP RIBS SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · MGR · MAGNETIC RING




| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR02-50PH1 | PH1 | 50 | 3.9 | 1/4" Hex Quick Change Shank |
| ASDR02-50PH2 | PH2 | 50 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR02-50PH3 | PH3 | 50 | 32 | 1/4" Hex Quick Change Shank |

## 50MM MEGA GRIP RIBS SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · MGR · MAGNETIC RING




| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR02-50PZ1 | PZ1 | 50 | 3.9 | 1/4" Hex Quick Change Shank |
| ASDR02-50PZ2 | PZ2 | 50 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR02-50PZ3 | PZ3 | 50 | 32 | 1/4" Hex Quick Change Shank |

## 110MM MEGA GRIP RIBS SCREWDRIVER BITT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · MGR · MAGNETIC RING




| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR02-110PH2 | PH2 | 110 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR02-110PZ2 | PZ2 | 110 | 10.3 | 1/4" Hex Quick Change Shank |

## DOUBLE-ENDED SCREWDRIVER POWER BIT-MAGNETIC RING

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC RING




| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR03-065B | PH2-PH2 | 65 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR03-110B | PH2-PH2 | 100 | 10.3 | 1/4" Hex Quick Change Shank |

## DOUBLE-ENDED SCREWDRIVER POWER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC RING




| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR03-065A | PH2-PH2 | 65 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR03-110A | PH2-PH2 | 110 | 10.3 | 1/4" Hex Quick Change Shank |

## DOUBLE-ENDED SCREWDRIVER POWER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · TORSION ZONE · SUPER HARD · MAGNETIC RING




| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR03-065C | PH2-PZ2 | 65 | 10.3 | 1/4" Hex Quick Change Shank |

## DRYWALL SCREWDRIVER BIT

3X LONG LIFE · S2 · 1/4" HEX SHANK · IMPACT · MAGNETIC




| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR04-25PH2 | PH2 | 25 | 10.3 | 1/4" Hex Shank |
| ASDR04-50PH2 | PZ2 | 50 | 10.3 | 1/4" Hex Shank |

## GCR15 SCREWDRIVER BIT

GCR 15 · 1/4" HEX SHANK · SUPER HARD · MAGNETIC




| Model | Size | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR05-25PH2 | PH2 | 25 | 10.3 | 1/4" Hex Shank |
| ASDR05-50PH2 | PH2 | 50 | 10.3 | 1/4" Hex Quick Change Shank |
| ASDR05-50H4 | H4 | 50 | 16 | 1/4" Hex Quick Change Shank |

## INOX BIT HOLDER

1/4" HEX SHANK · MAGNETIC




| Model | Overall Length (mm) | Shank Type |
|---|---|---|
| ASDR07-SS060 | 60 | 1/4" Hex Quick Change Shank |
| ASDR07-SS075 | 75 | 1/4" Hex Quick Change Shank |
| ASDR07-SS150 | 150 | 1/4" Hex Quick Change Shank |

## QUICK CHANGE QUICK-RELEASE BITHOLDER, EXTRA LONG

1/4" HEX SHANK · MAGNETIC




| Model | Overall Length (mm) | Shank Type |
|---|---|---|
| ASDR07-QR150 | 150 | 1/4" Hex Quick Change Shank |
| ASDR07-QR300 | 300 | 1/4" Hex Quick Change Shank |






## SCREW GUIDES-RETRACTING SLEEVES

2X LONG LIFE · 1/4" HEX SHANK · IMPACT · MAGNETIC

| Model | Size (mm) | Overall Length (mm) | Torque (N.m) | Shank Type |
|---|---|---|---|---|
| ASDR06-0006 | 6 | 65 | 20.6 | 1/4" Hex Quick Change Shank |
| ASDR06-0007 | 7 | 65 | 26.8 | 1/4" Hex Quick Change Shank |
| ASDR06-0008 | 8 | 65 | 33.6 | 1/4" Hex Quick Change Shank |
| ASDR06-0010 | 10 | 65 | 49.1 | 1/4" Hex Quick Change Shank |
| ASDR06-0012 | 12 | 65 | 67 | 1/4" Hex Quick Change Shank |
| ASDR06-0013 | 13 | 65 | 68 | 1/4" Hex Quick Change Shank |
| ASDR06-0014 | 14 | 65 | 68.6 | 1/4" Hex Quick Change Shank |




## SDS PLUS BIT HOLDER

5X LONG LIFE · IMPACT · MAGNETIC

Bitholder, 1/4" hexagon drive to ISO 1173, with permanent magnet and spring clip, SDS Plus shank.

| Model | Overall Length (mm) | Shank Type |
|---|---|---|
| ASDR07-SDS75 | 75 | SDS-Plus Shank |




## SCREW GUIDES-RETRACTING SLEEVES

5X LONG LIFE · MAGNETIC

Impact magnetic Drive Guides are engineered to be the most durable and offer the best control on the market. The new stainless steel sleeve provides increased fastener stability . The new drive guides feature our optimized shock zone that absorbs peak torque and provides us up to 10X longer life vs. the competition.

| Model | Overall Length (mm) | Shank Type |
|---|---|---|
| ASDR07-SG075 | 75 | 1/4" Hex Quick Change Shank |




## 3PCS SOCKET ADAPTERS


2X LONG LIFE · 1/4" HEX SHANK · IMPACT

Impact socket Adapters are engineered for extreme durability and up to 10X life. They are made from S2 special Steel that maximizes resistance to wear and shock. The Adapters feature an optimized shock zone which absorbs peak torque and prevents the adapter from breaking. Impact Socket Adapters offer extreme durability for even the mostdemanding applications.



| Model | Overall Length (mm) | Shank Type |
|---|---|---|
| ASDR07-AD003 | 1/4"x65mm、3/8"x65mm、1/2"x73mm | 1/4" Hex Quick Change Shank |

## DOUBLE-ENDED SCREWDRIVER BIT











| Model | Overall Length (mm) | Material |
|---|---|---|
| ASDR03-065CA | 65 | S2 |
| ASDR03-065AA | 65 | S2 |

## 10-PIECE IMPACT SCREWDRIVER BIT SET

Bitholder, 1/4" hexagon drive to ISO 1173, with permanent magnet and spring clip, SDS Plus shank.











| Model | Overall Length (mm) | Material |
|---|---|---|
| ASDR01-50PH2A | 50 | S2 |
| ASDR01-50PZ2A | 50 | S2 |

## 22PCS MULTI IMPACT BITS KEYCHAIN SET



P.I.T. impact Bits were developed for extreme requirements and are absolutely impact-resistant and thus especially suitable for use in impact screwdrivers. Made of S2 special steel. The maximum-length torsion zone of the 25 mm or 50mm long bit provides for over-average tool life also with most extreme requirements. 1/4" quick Change Shank.




| Model | ASDR07-SDS75 |
|---|---|
| Sizes(mm) | Impact Power Bit :<br>25mm:PH1*1、PH2*3、PH3*2、PZ1*1、PZ2*2、PZ3*1、SL4*1、SL6*1、<br>T10*1、T15*1、T25*1、SQ1*1、SQ2*1、SQ3*1、H4*1、H5*1<br>50mm：PH2*1<br>75mm Bit Holder*1 |
| Material | S2 |
| Surface Treatment | Sandblasting + Electroplating Oxidation + Color Ring |
| Pack Quantity | 22PC |

## 2PCS SCREWDRIVER BIT STRONG MAGNETIZER




Instant magnetize / demagnetize
N38 strong magnet, hold screws firmly
For 6.35mm hex screwdriver bits
Tough PC housing



| Model | Size | Interface Size (mm) | Magnet Grade |
|---|---|---|---|
| ASDR14-0002 | 13×12.5×12mm | 6.35 | N38 |

## LED BIT MAGNETIZER




Super Strong Magnetism
The built-in premium magnetic core provides double the adsorption power of regular magnetic rings.
It securely holds screws, bits and nuts to avoid slipping and falling, perfect for overhead, tight-space and high-altitude operations.





| Model | Overall Length (mm) | Fits | Magnet Grade |
|---|---|---|---|
| ASDR14-0001 | 30x20 | 3mm-6.5mm | N35 |

## 6PCS 1/4" BIT HOLDER KEYCHAIN

Quick Release



Wide Application & Good Compatibility
This bit holder keychain works with most 1/4" hex shank screwdriver bits. Its 1/4" hex shank & socket fits various electric and manual screwdrivers, serving as a handy add-on for DIY projects and multi-tool kits.




| Model | Total Length (mm) | Interface Size |
|---|---|---|
| ASET16-0006 | 58 | 6.35mm |

## IMPACT SCREWDRIVER BIT HOLDERS









| Model | Size | work Length (mm) | Overall Length (mm) | Material |
|---|---|---|---|---|
| ASKA01-0012 | 1/2"Impact screwdriver bit holders | 6.35mm | 19.3mm | 42CrMo |
| ASKA02-0038 | 3/8"Impact screwdriver bit holders | 6.35mm | 19.3mm | 42CrMo |
| ASKA03-0014 | 1/4"Impact screwdriver bit holders | 6.35mm | 15mm | 42CrMo |

## 32 PCS IMPACT DRIVER& DRILL BIT SET






P.I.T. impact Bits were developed for extreme requirements and are absolutely impact-resistant and thus especially suitable for use in impact screwdrivers. Made of S2 special steel. The maximum-length torsion zone of the 25 mm or 50mm long bit provides for over-average tool life also with most extreme requirements. 1/4" quick Change Shank.

| Model | ASET05-0032 |
|---|---|
| Sizes(mm) | Impact Power Bit :<br>7pcs 25mm PH1,PH2,PH3,T20,T25,H3,H4<br>14PCS 50mm PH1*1,PH2*2,PH3*1,PZ1*1,PZ2*2,PZ3*1,T20*1,T25*2,SQ1*1,SQ2*1,SQ3*1<br>6pcs Hex Shank Twist Drill Bits Set :<br>2mm,2.5mm,3mm,3.5mm,4mm,5mm<br>1pc Stainless Steel Extension Bar, 60mm<br>1pc Telescopic Extension Bar<br>3pcs Magnetic Socket Bits:<br>6mm, 8mm, 10mm |
| Material | Bits: S2 steel, 58-62HRC; Twist Drill Bits: HSS M2; Stainless Steel Extension Bar with stainless steel sleeve; Hex Shank: CRV; |
| Surface Treatment | Sandblasting + Electroplating Oxidation + Color Ring |
| Pack Quantity | 32PCS |
| Packaging | Plastic Box + Label + Double Blister |

## 40 PCS IMPACT DRIVER BITS SET



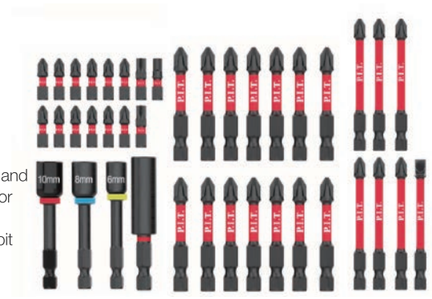

P.I.T. impact Bits were developed for extreme requirements and are absolutely impact-resistant and thus especially suitable for use in impact screwdrivers. Made of S2 special steel. The maximum-length torsion zone of the 25 mm or 50mm long bit provides for over-average tool life also with most extreme requirements. 1/4" quick Change Shank.

| Model | ASET04-0040 |
|---|---|
| Sizes(mm) | Impact Power Bit :<br>15pcs 25mm TT10,TT15,TT20,TT25,TT27,TT30,TT40,H3,H4,H5,SL3,SL4,SL5,SL6,PH2;<br>14pcs 50mm PH1,PH2*3,PH3,PZ1,PZ2*2,PZ3,H4*2,SQ1,SQ2,SQ3;<br>7pcs 75mm PH1,PH2,PH3,PZ1,PZ2,PZ3,SL5.5;<br>1pc 60mm Stainless Steel Extension Bar<br>3pcs Magnetic Sockets: 6mm, 8mm, 10mm |
| Material | Bits: Material: S2 steel; Hardness: 58-62HRC; Shank: 1/4" Hex Shank; Surface Finish: Black Phosphating<br>Stainless Steel Extension Bar: Sleeve Material: Stainless Steel; Shaft Material: SUP11;<br>Magnetic Sockets: Material: 40Cr; Shank: Hex Shank; Hardness: 48-55HRC; Surface Finish: Black Phosphating |
| Surface Treatment | Sandblasting + Electroplating Oxidation + Color Ring |
| Pack Quantity | 40PCS |
| Packaging | Plastic Box + Label + Double Blister |



## 30 PCS IMPACT DRIVER& STEP DRILL BIT SET





P.I.T. impact Bits were developed for extreme requirements and are absolutely impact-resistant and thus especially suitable for use in impact screwdrivers. Made of S2 special steel. The maximum-length torsion zone of the 25 mm or 50mm long bit provides for over-average tool life also with most extreme requirements. 1/4" quick Change Shank.

| Model | ASET04-0030 |
|---|---|
| Sizes(mm) | Impact Power Bit :<br>7pcs 25mm PH1,PH2,PH3,T20,T25,H3,H4;<br>14PCS 50mm PH1,PH2*2,PH3,PZ1,PZ2*2,PZ3,T20,T25*2,SQ1,SQ2,SQ3;<br>1pc Stainless Steel Extension Bar, 60mm<br>3pcs Magnetic Sockets: 6mm, 8mm, 10mm<br>3pcs Socket Extension Bars: 1/2", 3/8", 1/4"<br>1pc Step Drill Bit, 4-12mm<br>1pc Magnetic Bit Holder, 18mm |
| Material | Bit : S2 Magnetic Sockets: Material: 40Cr |
| Surface Treatment | Sandblasting + Electroplating Oxidation + Color Ring |
| Pack Quantity | 30PCS |
| Packaging | Plastic Box + Label + Double Blister |

## 43PCS IMPACT DRIVER BIT SET





P.I.T. impact Bits were developed for extreme requirements and are absolutely impact-resistant and thus especially suitable for use in impact screwdrivers. Made of S2 special steel. The maximum-length torsion zone of the 25 mm or 50mm long bit provides for over-average tool life also with most extreme requirements. 1/4" quick Change Shank.

| Model | ASET04-0043 |
|---|---|
| Sizes(mm) | Impact Power Bit :<br>28pcs 25mm H4,H5,H6,SL4,SL5*3,SL6,PH1,PH2*3,PH3,PZ1,PZ2*3,PZ3,T10,T15,T20,T25*3,T27,T30*2,T40;<br>7pcs 50mm PH1,PH2*2,PH3,PZ1,PH2*2;<br>6pcs 75mm PZ3,T15,T20,T25,PZ2,PH2;<br>1pc Magnetic Bit Holder (18*15mm)<br>1pc Stainless Steel Extension Bar, 75mm |
| Material | Bits: S2 steel, hardness 58-62HRC, 1/4" hex shank, black phosphating finish. Stainless Steel Extension Bar:<br>stainless steel sleeve, SUP11 shaft, QPQ + black phosphating. Magnetic Bit Holder: PC housing, N30 magnet grade. |
| Surface Treatment | Sandblasting + Electroplating Oxidation + Color Ring |
| Pack Quantity | 43PCS |
| Packaging | Plastic Box + Label + Double Blister |



## 23PCS IMPACT DRIVER& STEP DRILL BIT SET



P.I.T. impact Bits were developed for extreme requirements and are absolutely impact-resistant and thus especially suitable for use in impact screwdrivers. Made of S2 special steel. The maximum-length torsion zone of the 25 mm or 50mm long bit provides for over-average tool life also with most extreme requirements. 1/4" quick Change Shank.



| Model | ASET04-0023A |
|---|---|
| Sizes(mm) | Impact Power Bit : |
| | 14pcs 50mm PH1,PH2*2,PH3,PZ1,PZ2*2,PZ3,T15,T20,T25,T30,H5,H6; |
| | 1pc Stainless Steel Extension Bar, 60mm |
| | 3pcs Magnetic Sockets: 6mm, 8mm, 10mm |
| | 3pcs Socket Extension Bars: 1/2", 3/8", 1/4" |
| | 1pc Step Drill Bit, 4-12mm |
| | 1pc Magnetic Bit Holder 18*15mm |
| | Stainless Steel Bit Holder :60mm |
| Material | Bits: S2 steel, hardness 58-62HRC, 1/4" hex shank, black phosphating finish. Stainless Steel Extension Bar: |
| Surface Treatment | Sandblasting + Electroplating Oxidation + Color Ring |
| Pack Quantity | 23PCS |
| Packaging | Plastic Box + Label + Double Blister |




## 25 MM 1/4 IN. CR-V SANDING FINISH BITS



| Model | ASET04-0019 |
|---|---|
| Sizes(mm) | 25MM 1/4 IN. CR-V SANDING FINISH BITS |
| | Slotted: 5mm,6mm |
| | Pozi PZ1,PZ2 |
| | Phillips: PH1,PH2,PH2 |
| | Torx: T10,T15,T20,T25 |
| | METRIC SOCKET:6mm,8mm,10mm,12mm |
| | 50MM 1/4 IN. CR-V SANDING FINISH BITS |
| | Pozi PZ2 |
| | Phillips: PH2 |
| | 1/4-inch Mini Ratchet Wrench |
| Material | S2 |
| Pack Quantity | 19PCS |
| Packaging | Plastic Box + Label + Shrinking |

## 32PCS SCREWDRIVER BIT SET



| Model | ASET04-0032 |
|---|---|
| Sizes(mm) | 60 mm stainless steel connecting rod, 1 pc |
| | 25 mm (1/4 in.) CR-V sanding finish adapter, 1 pc |
| | SL3, SL4, SL5, SL6 — 4 pcs |
| | PH1, PH2, PH2, PH3 — 4 pcs |
| | PZ1, PZ2, PZ2, PZ3 — 4 pcs |
| | T10, T15, T20, T25, T27, T30, T40 — 7 pcs |
| | TT10, TT15, TT20, TT25, TT27, TT30, TT40 — 7 pcs |
| | H3, H4, H5, H6 — 4 pcs |
| Material | S2 |
| Pack Quantity | 32PCS |
| Packaging | Plastic Box + Label + Shrinking |

## 10PCS MINI SCREWDRIVER BIT SET







COLOR RING

| Model | ASET04-0010 |
|---|---|
| Sizes(mm) | 9pcs 25mm screwdriver bit, |
| | PH2, PH3, Slotted 5, 6 mm, |
| | T15, T20, T25, T30 ,T40 |
| | 1pc Bit Holder |
| Material | S2 |
| Surface Treatment | Chrome plating + Color Ring |
| Pack Quantity | 10PCS |
| Packaging | Plastic Box + Label + Shrinking |

## DRUAPOWER 23PCS SCREWDRIVER BIT SET

S2 TORSION ZONE CR-V VANADIUM




| Model | ASET04-0023 |
|---|---|
| Sizes(mm) | 18pcs 25mm screwdriver bit, PH2x3, PH3, PZ2x3, PZ3, Hex4, 5, 6mm<br>T20x2 ,T25x2, T30x2, T40<br>4pcs 50mm screwdriver bit, PZ2, PH2, T20, T30<br>1pc Bit Holder |
| Material | S2 |
| Surface Treatment | Chrome plating + Color Ring |
| Pack Quantity | 23PCS |
| Packaging | Plastic Box + Label + Shrinking |

## DRUAPOWER 24PCS SCREWDRIVER BIT SET

S2 TORSION ZONE CR-V VANADIUM





| Model | ASET04-0024 |
|---|---|
| Sizes(mm) | 15pcs 25mm screwdriver bit, PH1, PH2, PH3, PZ1, PZ2, PZ3, Slotted 4, 5, 6 mm, T10 ,T15, T20, T25, T30 ,T40<br>1pcs 1/4 in adapter<br>6pcs 1/4 in Driver 6-Point Socket, 6, 7, 8, 10, 11, 13mm<br>1pc Bit Holder<br>1pc Double ring ratchet |
| Material | Screwdriver :S2, Socket: Crv |
| Surface Treatment | Chrome plating + Color Ring |
| Pack Quantity | 24PCS |
| Packaging | Plastic Box + Label + Shrinking |

## ADVANCEPOWER 4PCS DAMAGED SCREW EXTRACTOR

This damaged screw remover tool kit is made from high hardness H.S.S. 4341, durable for extracting stripped, broken, stuck or damaged screws.
Easy Operation： Two easy steps, just need a drill, no other tools need, select a smaller bit than the damage screw, you can easily remove the screw, please make sure to run the drill in reverse during the process.
One bit has two different heads, one is used to drill a hole in the middle of the snapped-head fastener with the drill end, the other is used to extract the screw or bolt。
can be widely used in household DIY, telecommunication, automotive or machinery repair work.

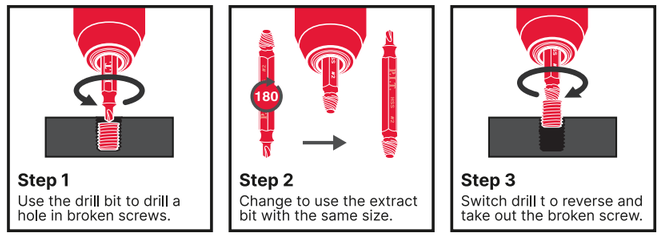


| Model | Size | Thread Diameter (mm) | Cutting Diameter (mm) | For Diameter (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|---|
| ATAM01-0003 | 1# | 2.3 | 2.7 | 3-5 | HSS 4341 | 4 | Double Blister |
| | 2# | 3 | 3.55 | 4-8 | HSS 4341 | 4 | Double Blister |
| | 3# | 3.4 | 4.1 | 5-10 | HSS 4341 | 4 | Double Blister |
| | 4# | 5.2 | 6.2 | 6-12 | HSS 4341 | 4 | Double Blister |



## ADVANCEPOWER 3/8"ANGLE DRILL ATTACHMENT WITH KEYLESS CHUCK




90° ANGLE DRILL ATTACHMENT

Right Angle Attachment allows contractors to drive screws and drill holes in tight, difficult work areas.This attachment is ideal for cordless drills and uses standard 1/4" hex accessories.It has a durable plastic housing and steel gears with ball bearing construction which allows this adapter t o handle up to 150 in-lbs of torque. The compact design measures only 50mm wide allowing it to fit in
tight spaces where work is difficult to perform. The convenient quick change chuck
accepts standard 1/4" hex drive accessories.



| Model | Size (mm) | Shank Type |
|---|---|---|
| ATAM01-0001 | 155x108x49 | 3/8" -24 UNF Thread |

## ADVANCEPOWER 90 ° ANGLE-BIT AND DRILL SET




90° ANGLE DRILL ATTACHMENT | MAGNETIC HEX ADAPTER | 1/4" QUICK CHANGE

This right angle adapter drill can withstand a maximum torque of 25N·m and a maximum speed of 1500 rpm. Heavy duty steel material.
90 degree drill adapter can make drill power swerve 90°and get to hard-reached places.
The right angle drill adapter's chuck accepts standard 0.8mm-10mm drill bits.
90 Degree Angle Drill is suitable for most standard drills like cordless drill, electric drill, etc.




| Model | Size (mm) | Shank Type |
|---|---|---|
| ATAM01-0002 | 152x33x23 | 1/4" Magnetic Hex Shank |

## ADVANCEPOWER 12PCS 90 ° ANGLE-BIT AND DRILL SET





90° ANGLE DRILL ATTACHMENT | MAGNETIC HEX ADAPTER | 1/4" QUICK CHANGE

This right angle adapter drill can withstand a maximum torque of 25N·m and a maximum speed of 1500 rpm. Heavy duty steel material.
90 degree drill adapter can make drill power swerve 90°and get to hard-reached places.
The right angle drill adapter's chuck accepts standard 0.8mm-10mm drill bits.
90 Degree Angle Drill is suitable for most standard drills like cordless drill, electric drill, etc.

| Model | Size (mm) | Shank Type |
|---|---|---|
| ATAM01-012A | 152x33x23 | 1/4" Magnetic Hex Shank |
| Sizes(mm) | PH1x1； PH2x2； PH3x1； 、 PZ1x1； PZ2x1； PZ3x1； TT10x1； TT15x1； TT20x1； TT25x1 | |

## BROAD BACK STAPLES&NAILS






| Model | Size | Height (mm) | Width (mm) | Thickness (mm) |
|---|---|---|---|---|
| ASTP53-006 | No.53 | 6 | 11.3 | 0.5x0.7 |
| ASTP53-008 | No.53 | 8 | 11.3 | 0.5x0.7 |
| ASTP53-010 | No.53 | 10 | 11.3 | 0.5x0.7 |
| ASTP53-012 | No.53 | 12 | 11.3 | 0.5x0.7 |
| ASTP53-014 | No.53 | 14 | 11.3 | 0.5x0.7 |

## TYPE 055 BROAD BACK STAPLES







| Model | Size | Height (mm) | Width (mm) | Thickness (mm) |
|---|---|---|---|---|
| ASTP55-012 | No.55 | 6 | 12 | 0.9x1.1 |
| ASTP55-015 | No.55 | 6 | 15 | 0.9x1.1 |
| ASTP55-020 | No.55 | 6 | 20 | 0.9x1.1 |
| ASTP55-025 | No.55 | 6 | 25 | 0.9x1.1 |

## TYPE 140 U STAPLES








| Model | Size | Height (mm) | Width (mm) | Thickness (mm) |
|---|---|---|---|---|
| ASTP140-006 | No.140 | 6 | 10.5 | 0.5x1.2 |
| ASTP140-008 | No.140 | 8 | 10.5 | 0.5x1.2 |
| ASTP140-010 | No.140 | 10 | 10.5 | 0.5x1.2 |
| ASTP140-012 | No.140 | 12 | 10.5 | 0.5x1.2 |
| ASTP140-014 | No.140 | 14 | 10.5 | 0.5x1.2 |

## TYPE 300 NAILS

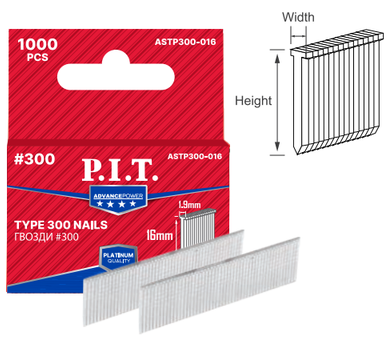






| Model | Size | Height (mm) | Width (mm) | Thickness (mm) |
|---|---|---|---|---|
| ASTP300-010 | No.300 | 10 | 1.9 | 0.95x1.2 |
| ASTP300-012 | No.300 | 12 | 1.9 | 0.95x1.2 |
| ASTP300-014 | No.300 | 14 | 1.9 | 0.95x1.2 |
| ASTP300-016 | No.300 | 16 | 1.9 | 0.95x1.2 |

## TYPE 500 NAILS

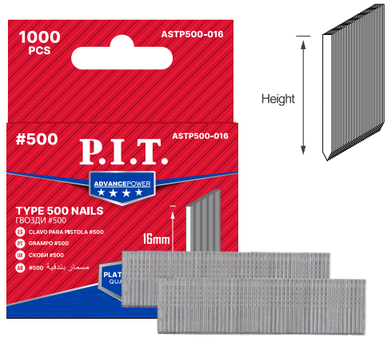





| Model | Size | Height (mm) | Width (mm) | Thickness (mm) |
|---|---|---|---|---|
| ASTP500-014 | No.500 | 14 | / | 0.95x1.2 |
| ASTP500-016 | No.500 | 16 | / | 0.95x1.2 |





## MIXER FOR PAINT

HEX HANDLE

Mixer for paint, metal spiral, for mixing emulsion and wall paint, thin mortar, heavy duty pattern, smooth running, plastic sheathed, for use in commonly used drills, minimum 500 watt.

| Model | Size (mm) | Blade Thickness (mm) | Spiral Length (mm) | Shank Type |
|---|---|---|---|---|
| AMIX01-060A | 60x8x400 | 1 | 85 | Hex Shank |
| AMIX01-085A | 85x8x400 | 1 | 100 | Hex Shank |
| AMIX01-100A | 100x8x600 | 1.2 | 130 | Hex Shank |



## PLASTER MIXER

HEX HANDLE

Mixers for adhesive, metal spiral, for mixing flooring adhesive, filler, tile adhesive, plaster and screed, heavy duty pattern, smooth running, plastic sheathed, no splashing of paint in use, for use in commonly used drills, minimum 500 watt, gives homogenous mixing, round vanes save energy.

| Model | Size (mm) | Blade Thickness (mm) | Spiral Length (mm) | Shank Type |
|---|---|---|---|---|
| AMIX01-080B | 80x8x530 | 5.2 | 140 | Hex Shank |
| AMIX01-100B | 100x10x590 | 5.2 | 160 | Hex Shank |



## MIXER FOR PAINT AND PLASTER MIXES

HEX HANDLE

Constructed from high strength steel with high quality welds to ensure a lifetime of use. Epoxy Mixer designed to withstand repeated.
Great for small or medium sized home DIY projects, crafting, and shop use. Projects involving the need to mix paint, stains, epoxy, and other similar items. It can also be used to mixed plaster and mortar for smaller projects.

| Model | Size (mm) | Blade Thickness (mm) | Spiral Length (mm) | Shank Type |
|---|---|---|---|---|
| AMIX01-060C | 60x8x400 | 1.5 | 65 | Hex Shank |
| AMIX01-080C | 80x8x400 | 1.5 | 75 | Hex Shank |
| AMIX01-100C | 100x10x600 | 1.5 | 95 | Hex Shank |
| AMIX01-120C | 120x10x600 | 1.5 | 115 | Hex Shank |



## MIXER FOR SAND AND GRAVEL MIXTURES

Mixers for mortar, metal spiral, for mixing mortar, tile adhesive, all types of plaster, heavy duty pattern, smooth running, plastic sheathed, no splashing of paint in use, SDS plus shank.

| Model | Size (mm) | Blade Thickness (mm) | Spiral Length (mm) | Shank Type |
|---|---|---|---|---|
| AMIX01-060D | 60x8x400 | 5.2 | 100 | SDS-Plus |
| AMIX01-080D | 80x8x400 | 5.2 | 160 | SDS-Plus |
| AMIX01-100D | 100x10x450 | 5.2 | 180 | SDS-Plus |
| AMIX01-120D | 120x10x600 | 5.2 | 190 | SDS-Plus |



## MIXER FOR PAINT AND PLASTER MIXTURES

With two wide mixing helixes for easy guidance in the material and minimal stress on the drive machine.Constructed from high strength steel with high quality welds to ensure a lifetime of use.
Projects involving the need to mix paint, stains, epoxy, and other similar items. It can also be used to mix plaster and mortar for smaller projects.

| Model | Size (mm) | Blade Thickness (mm) | Spiral Length (mm) | Shank Type |
|---|---|---|---|---|
| AMIX01-060E | 60x400 | 1.5 | 65 | SDS-Plus |
| AMIX01-080E | 80x400 | 1.5 | 75 | SDS-Plus |
| AMIX01-100E | 100x600 | 1.5 | 95 | SDS-Plus |
| AMIX01-120E | 120x600 | 1.5 | 110 | SDS-Plus |



## MIXER ATTACHMENT, FOR HEAVY MORTARS

Heavy duty Mixers for mortar, Anti-spiral design， metal spiral, M14 outside thread with hexagon flange, for mixing mortar, cement, screed, concrete and adhesives, heavy duty pattern, easy, safe and smooth running, powder coated, no splashing of paint in use.

| Model | Size (mm) | Blade Thickness (mm) | Spiral Length (mm) | Shank Type |
|---|---|---|---|---|
| AMIX01-120F | 120x600 | 2.8 | 125 | M14 Thread |
| AMIX01-140F | 140x600 | 2.8 | 160 | M14 Thread |
| AMIX01-160F | 160x600 | 2.8 | 180 | M14 Thread |



## MIXER ATTACHMENT, FOR LIGHT SOLUTIONS

Heavy duty Mixers for mortar, metal spiral, M14 outside thread with hexagon flange, for mixing mortar, cement, screed, concrete and adhesives, heavy duty pattern, easy, safe and smooth running, powder coated, no splashing of paint in use.

| Model | Size (mm) | Blade Thickness (mm) | Spiral Length (mm) | Shank Type |
|---|---|---|---|---|
| AMIX01-120G | 120x600 | 2.8 | 125 | M14 Thread |
| AMIX01-140G | 140x600 | 2.8 | 160 | M14 Thread |




## GLUE STICK

These hot Glue Stick bonds to virtually all materials including paper, metal, plastic, wood, fabric, ceramic foam lace ribbon synthetic fabric and more. Glue Sticks bond to virtually all materials in as little as 30 seconds. Glue Sticks work in high, low dual and multi temperature hot glue guns Use low temperature hot glue guns to bond delicate materials like paper lace and fabric Use high temperature glue guns to bond porous and heavier materials like glass and metal. Perfect to use at home, office or school Ideal for scrapbooking, crafting, DIY and school projects No harsh chemicals and acid-free.Fits all full size hot glue guns .




AGLS07-0150 AGLS11-200A AGLS11-200B AGLS11-200C AGLS11-200D AGLS11-200E

| Model | Product Name | Diameter (mm) | Overall Length (mm) |
|---|---|---|---|
| AGLS07-0150 | Glue Stick, Transparent | 7 | 150 |
| AGLS11-200A | Glue Stick, Transparent | 11 | 200 |
| AGLS11-200B | Glue Stick, Transparent | 11 | 200 |
| AGLS11-200C | Glue Stick, Black | 11 | 200 |
| AGLS11-200D | Glue Stick, Yellow | 11 | 200 |
| AGLS11-200E | Glue Stick, White | 11 | 200 |







## **ACCESSORIES** Cuting




















DRUAPOWER




## ABRASIVES CUTTING DISC

2X LONG LIFE · INOX & STEEL · 1.6mm ULTRA THIN

Cutting discs are extra thin for metal, offering optimal performance with less effort and longer life, especially suitable for thin sheet metal, steel and stainless steel tubes, for all standard angle grinders with peripheral disc speed of 80 m/s.

| Model | Diameter (mm) | Bore | Disc Thickness (mm) |
|---|---|---|---|
| ACTW01-7612 | 76 | 10 | 1.2 |
| ACTW01-1151 | 115 | 22.23 | 1.0 |
| ACTW01-1152 | 115 | 22.23 | 1.2 |
| ACTW01-1153 | 115 | 22.23 | 1.6 |
| ACTW01-1251 | 125 | 22.23 | 1.2 |
| ACTW01-1252 | 125 | 22.23 | 1.6 |
| ACTW01-1502 | 150 | 22.23 | 1.6 |
| ACTW01-1503 | 150 | 22.23 | 2.0 |
| ACTW01-1504 | 150 | 22.23 | 2.5 |
| ACTW01-1801 | 180 | 22.23 | 1.6 |
| ACTW01-1802 | 180 | 22.23 | 2.0 |
| ACTW01-1803 | 180 | 22.23 | 2.5 |
| ACTW01-2301 | 230 | 22.23 | 1.6 |
| ACTW01-2302 | 230 | 22.23 | 2.0 |
| ACTW01-2303 | 230 | 22.23 | 2.5 |
| ACTW01-1250A | 125 | 22.23 | 1.0 |
| ACTW01-1250C | 125 | 22.23 | 1.0 |
| ACTW01-1001 | 125 | 22.23 | 1.2 |
| ACTW01-1002 | 125 | 22.23 | 1.6 |
| ACTW01-3551 | 355 | 25.40 | 3.2 |

## ALUMINUM CIRCULAR SAW BLADE




Tungsten carbide tipped, precise, clean cut. Special variable pitch teeth, for hand-held circular saws, bench and table saws as well as chop- and mitre saws. For hard and soft wood, laminated wood, aluminium plates and profiles, lightweight panels, plastic including Plexiglas.

| Model | Diameter (mm) | Bore (mm) | Teeth | Disc Thickness (mm) | Teeth Type |
|---|---|---|---|---|---|
| ACTW13-180T56 | 180 | 16/20 | 56T | 1.6 | TCG |
| ACTW13-185T64 | 185 | 16/20/22.23/25.4/30 | 64T | 2.0 | TCG |
| ACTW13-200T64 | 200 | 16/20/22.23/25.4/30 | 64T | 2.0 | TCG |
| ACTW13-210T80 | 210 | 16/20/22.23/25.4/30 | 80T | 2.2 | TCG |
| ACTW13-255T100 | 255 | 16/20/22.23/25.4/30 | 100T | 2.4 | TCG |

## STEEL CUTTING CIRCULAR SAW BLADE




Tungsten carbide tipped, precise, clean cut. Special variable pitch teeth, for bench and table saws as well as chop- and mitre saws. For hard and soft wood, laminated wood, aluminium plates and profiles, lightweight panels, plastic including Plexiglas.

| Model | Diameter (mm) | Bore (mm) | Teeth | Disc Thickness (mm) | Teeth Type |
|---|---|---|---|---|---|
| ACTW15-216T48 | 216 | 16/20/22.23/25.4/30 | 48T | 1.4 | TCG |
| ACTW15-305T72 | 305 | 16/20/22.23/25.4/30 | 72T | 2.0 | TCG |

## STEEL CUTTING CIRCULAR SAW BLADE




Tungsten carbide tipped, precise, clean cut. Special variable pitch teeth, for bench and table saws as well as chop- and mitre saws. For hard and soft wood, laminated wood, aluminium plates and profiles, lightweight panels, plastic including Plexiglas.

| Model | Diameter (mm) | Bore (mm) | Teeth | Disc Thickness (mm) | Teeth Type |
|---|---|---|---|---|---|
| ACTW16-216T48 | 216 | 16/20/22.23/25.4/30 | 48T | 1.4 | TCG |
| ACTW16-254T60 | 254 | 16/20/22.23/25.4/30 | 60T | 1.6 | TCG |
| ACTW16-305T72 | 305 | 16/20/22.23/25.4/30 | 72T | 2.0 | TCG |

## GRINDER WOOD CUTTING DISC




There is a wood carving disc especially designed for an angle grinder . The unusual shape ensures safe work on a wide range of materials: wood, laminated flooring, parquet (hardwood),aerated concrete, plasterboard and plastic. This grinder shaping disc has a special design in which the disc body has feed stop. This prevents the disc from being submerged into the material uncontrolled, which in turn prevents the kickback.




| Model | Diameter (mm) | Bore (mm) | Teeth | Disc Thickness (mm) | Teeth Type |
|---|---|---|---|---|---|
| ACTW06-125T3 | 125 | 22.23 | 3 | 2.2 | 12000 RPM |

## PRECISION CIRCULAR SAW BLADE




Tungsten carbide tipped, quick, clean cut with break-out free cut edges. Fine teeth, for hand-held circular saws. For solid wood, laminated boards (work surfaces and kitchen worktops), blockboard, chipboard and fibreboard as well as glass fibre reinforced plastics. nail resistant.

| Model | Diameter (mm) | Bore (mm) | Teeth | Disc Thickness (mm) | Teeth Type |
|---|---|---|---|---|---|
| ACTW12-185T40 | 185 | 16/20/22.23/25.4/30 | 40 | 2.0 | TCG |
| ACTW12-200T64 | 200 | 16/20/22.23/25.4/30 | 64 | 2.0 | TCG |
| ACTW12-210T64 | 210 | 16/20/22.23/25.4/30 | 64 | 2.2 | TCG |
| ACTW12-235T64 | 235 | 16/20/22.23/25.4/30 | 64 | 2.2 | TCG |
| ACTW12-250T80 | 250 | 16/20/22.23/25.4/30 | 80 | 2.4 | TCG |
| ACTW12-255T80 | 255 | 16/20/22.23/25.4/30 | 80 | 2.4 | TCG |

## CIRCULAR SAW BLADE




Tungsten carbide tipped, fast, coarse cut. Coarse teeth, for hand-held circular saws, saw benches and table saws. For firewood, construction timber and boards.




| Model | Diameter (mm) | Bore (mm) | Teeth | Disc Thickness (mm) | Teeth Type |
|---|---|---|---|---|---|
| ACTW14-165T20 | 165 | 16/20 | 20 | 1.4 | ATB |
| ACTW14-165T36 | 165 | 16/20 | 36 | 1.4 | ATB |
| ACTW14-185T24 | 185 | 16/20/22.23/25.4/30 | 24 | 1.4 | ATB |
| ACTW14-185T40 | 185 | 16/20/22.23/25.4/30 | 40 | 1.4 | ATB |
| ACTW14-190T24 | 190 | 16/20/22.23/25.4/30 | 24 | 1.4 | ATB |
| ACTW14-200T24 | 200 | 16/20/22.23/25.4/30 | 24 | 1.4 | ATB |
| ACTW14-200T40 | 200 | 16/20/22.23/25.4/30 | 40 | 1.4 | ATB |
| ACTW14-200T48 | 200 | 16/20/22.23/25.4/30 | 48 | 1.4 | ATB |
| ACTW14-210T24 | 210 | 16/20/22.23/25.4/30 | 24 | 1.4 | ATB |
| ACTW14-210T48 | 210 | 16/20/22.23/25.4/30 | 48 | 1.4 | ATB |
| ACTW14-235T24 | 235 | 16/20/22.23/25.4/30 | 24 | 1.8 | ATB |
| ACTW14-235T48 | 235 | 16/20/22.23/25.4/30 | 48 | 1.8 | ATB |
| ACTW14-250T24 | 250 | 16/20/22.23/25.4/30 | 24 | 2.2 | ATB |
| ACTW14-250T60 | 250 | 16/20/22.23/25.4/30 | 60 | 2.2 | ATB |

## CIRCULAR SAW BLADE




There is a wood carving disc especially designed for an angle grinder . The unusual shape ensures safe work on a wide range of materials: wood, laminated flooring, parquet (hardwood),aerated concrete, plasterboard and plastic. This grinder shaping disc has a special design in which the disc body has feed stop. This prevents the disc from being submerged into the material uncontrolled, which in turn prevents the kickback.

| Model | Diameter (mm) | Bore (mm) | Teeth | Segment Thickness (mm) | Teeth Type |
|---|---|---|---|---|---|
| ACTW17-150T24 | 150 | 20 | 24 | 1.0 | ATB |
| ACTW17-165T24 | 165 | 20 | 24 | 1.0 | ATB |

CONTROLPOWER




## GENERAL PURPOSE SEGMENTED RIM DIAMOND BLADE

DIAMOND DRY CUT WET CUT

Diamond cutting discs, segmented-edge, segment height 7 mm, for high cutting performance; for brick; concrete; pavers; for all standard angle grinders with peripheral disc speed of 80 m/s.



| Model | Diameter (mm) | Bore (mm) | Segment Height (mm) | Segment Thickness (mm) | Disc Thickness (mm) |
|---|---|---|---|---|---|
| ACTW02-G115 | 115 | 22.23 | 7.0 | 1.9 | 1.2 |
| ACTW02-G125 | 125 | 22.23 | 7.0 | 2 | 1.2 |
| ACTW02-G230 | 230 | 22.23 | 7.0 | 2.6 | 1.8 |

CONTROLPOWER




## CONTINUOUS RIM DIAMOND BLADE

DIAMOND DRY CUT WET CUT

Diamond cutting discs for tiles, continuous rim, turbo edge, segment height 5 mm, for high cutting performance on tiles, travertin, for all commonly used angle grinders with peripheral disc speed of 80 m/s.



| Model | Diameter (mm) | Bore (mm) | Segment Height (mm) | Segment Thickness (mm) | Disc Thickness (mm) |
|---|---|---|---|---|---|
| ACTW02-C115 | 115 | 22.23 | 7.0 | 1.9 | 1.2 |
| ACTW02-C125 | 125 | 22.23 | 7.0 | 2.0 | 1.2 |


CONTROLPOWER




## SUPER THIN TURBO DIAMOND SAW BLADE

DIAMOND DRY CUT WET CUT

Diamond cutting discs, continuous rim, turbo pattern, 7.5 mm high segments, for marble, hollow concrete blocks, concrete roof tiles, ceramics, tiles, for all standard angle grinders with peripheral disc speed of 80 m/s.



| Model | Diameter (mm) | Bore (mm) | Segment Height (mm) | Segment Thickness (mm) | Disc Thickness (mm) |
|---|---|---|---|---|---|
| ACTW02-T115 | 115 | 22.23 | 7.0 | 2.0 | 1.2 |
| ACTW02-T125 | 125 | 22.23 | 7.0 | 2.0 | 1.2 |
| ACTW02-T180 | 180 | 22.23 | 7.0 | 2.8 | 1.6 |



ADVANCEPOWER




## GENERAL PURPOSE SEGMENTED RIM DIAMOND BLADE

DIAMOND DRY CUT WET CUT

Diamond cutting discs, segmented-rim, segments 10 mm deep, for high cutting performance in commercial use, for granite, concrete blocks, hard concrete, all natural and artificial stone, for all standard angle grinders with peripheral disc speed of 80 m/s.



| Model | Diameter (mm) | Bore (mm) | Segment Height (mm) | Segment Thickness (mm) | Disc Thickness (mm) |
|---|---|---|---|---|---|
| ACTW03-G125A | 125 | 22.23 | 10 | 2 | 1.4 |
| ACTW03-G180A | 180 | 22.23 | 10 | 2.2 | 1.6 |
| ACTW03-G230A | 230 | 22.23 | 10 | 2.6 | 1.8 |

ADVANCEPOWER




## CONTINUOUS RIM DIAMOND BLADE

DIAMOND DRY CUT WET CUT

Diamond cutting discs, continuous rim, turbo pattern, 7 mm segment height, for high cutting performance in long-term professional use, for tiles, ceramics, travertin, marble, for all standard angle grinders with peripheral disc speed of 80 m/s.



| Model | Diameter (mm) | Bore (mm) | Segment Height (mm) | Segment Thickness (mm) | Disc Thickness (mm) |
|---|---|---|---|---|---|
| ACTW03-C150A | 150 | 22.23 | 7 | 2 | 1.4 |
| ACTW03-C180A | 180 | 22.23/25.4 | 7 | 2 | 1.6 |
| ACTW03-C200A | 200 | 22.23/25.4 | 7 | 2.2 | 1.6 |
| ACTW03-C230A | 230 | 22.23/25.4 | 7 | 2.2 | 1.8 |
| ACTW03-C300A | 300 | 22.23/25.4 | 7 | 2.4 | 1.8 |

ADVANCEPOWER




## SUPER THIN TURBO DIAMOND SAW BLADE

DIAMOND DRY CUT WET CUT

Diamond cutting discs, continuous rim, turbo pattern, 10mm high segment, for high cutting performance in long-term professional use, for granite, concrete, pavers, clay and concrete roof tiles, all natural and reconstituted stone, hard-fired tiles, for all standard angle grinders with peripheral disc speed of 80 m/s.



| Model | Diameter (mm) | Bore (mm) | Segment Height (mm) | Segment Thickness (mm) | Disc Thickness (mm) |
|---|---|---|---|---|---|
| ACTW03-T125A | 125 | 22.23 | 10 | 1.6 | 1.4 |
| ACTW03-T150A | 150 | 22.23 | 10 | 1.6 | 1.4 |
| ACTW03-T230A | 230 | 22.23 | 10 | 2.2 | 1.8 |

DRUAPOWER




## CARBIDE MULTI WHEEL CUTTING DISC

VACUUM BRAZING TECHNOLOGY




This is a unit-cast wood carving disc with sawed teeth. Grit is applied with thermal pressing at the edges of these teeth. Abrasive having high strength and large sizes can cut not only wood but also wood with nails.

| Model | Diameter | Bore (mm) | Teeth | Disc Thickness |
|---|---|---|---|---|
| ACTW07-0115 | 115 | 22.23 | 8 | 1.2 |
| ACTW07-0125 | 125 | 22.23 | 8 | 1.2 |

DRUAPOWER



## 2IN1 DIAMOND CUTTING BLADE




A diamond-bearing bond with a honeycomb layer pattern makes your cutting soft and highly productive simultaneously. The large plane creates a fulcrum effect, directing the blade in a straight line. Additionally, you can grind the edge of the tile end.Used on angle grinder without the use of coolant.



| Model | Diameter | Bore (mm) | Disc Thickness (mm) |
|---|---|---|---|
| ACTW11-0125A | 125 | 22.23 | 1.6 |

DRUAPOWER



## ULTRA THIN DIAMOND CUTTING BLADE




The diamond cutting blade is used for cutting ceramic materials with the presence of decorative coatings. Due to the standard 22.2 mm mounting , it can be used on almost any grinding machine for dry cutting.Equipped with an ultra-thin diamond layer of 1.1 millimeters, which allows to cut the tile even with a soft glaze.



| Model | Diameter | Bore (mm) | Disc Thickness (mm) |
|---|---|---|---|
| ACTW11-0125B | 125 | 22.23 | 1.1 |

DRUAPOWER



## ULTRA THIN DIAMOND CUTTING BLADE




The diamond cutting blade is used for cutting ceramic materials with the presence of decorative coatings. Due to the standard 22.2 mm mounting , it can be used on almost any grinding machine for dry cutting.Equipped with an ultra-thin diamond layer of 1.1 millimeters, which allows to cut the tile even with a soft glaze.



| Model | Diameter | Bore (mm) | Disc Thickness (mm) |
|---|---|---|---|
| ACTW11-0125C | 125 | 22.23 | 1.1 |

DRUAPOWER



## MULITI DIAMOND SAW BLADE




Our cut off wheel has constant diameter that allows dry cutting of metal, rebar, iron, metal profiles, aluminium, different types of pipes and another sheet metals.less sparks, no dust, no smell, no overheating. The diamond cutting wheel can be used for grinding burred edges that can leave after rough metal cutting.



| Model | Diameter | Bore (mm) | Segment Thickness (mm) | Segment Height (mm) |
|---|---|---|---|---|
| ACTW11-0115 | 115 | 22.23 | 2.2 | 4 |



ADVANCEPOWER

## WOOD PLUNGE CUTTING BLADE




Perfect capabilities at assambled parts, high cutting speed， material: HCS. Especially clean and quick cuts into hard wood, soft wood, laminate, parquet, plastic etc. Easy plunging into the material at any place. E.g. trouble-free plunge-cuts into parquet floors, real-wood kitchen countertops for ventilation grilles, in cabinets or gypsum plasterboard slabs for access to power outlets.




ACTW08-310A　ACTW08-320A　ACTW08-334A　ACTW08-368A　ACTW08-387A

| Model | Product Name | Work Length (mm) | Overall Length (mm) | Width (mm) | Material |
|---|---|---|---|---|---|
| ACTW08-310A | Wood Plunge Cutting Blade 10mm | 10 | 92 | 34 | 58CRV |
| ACTW08-320A | Wood Plunge Cutting Blade 20mm | 20 | 92 | 34 | 58CRV |
| ACTW08-334A | Wood Plunge Cutting Blade 34mm | 34 | 92 | 34 | 58CRV |
| ACTW08-368A | Wood Plunge Cutting Blade 68mm | 68 | 92 | 32.5 | 58CRV |
| ACTW08-387A | Wood Segmented Cutting Blade 87mm | 87 | / | / | 58CRV |

ADVANCEPOWER

## 14T WOOD PLUNGE CUTTING BLADE




For precise, fine cuts in wood. suitable for plunge cuts and longitudinal cuts as well as cutting to length. for soft wood, hardwood, laminate, parquet. material: HCS




ACTW08-334B　ACTW08-368B



| Model | Product Name | Work Length (mm) | Overall Length (mm) | Width (mm) | Material |
|---|---|---|---|---|---|
| ACTW08-334B | 14T Wood Plunge Cutting Blade 34mm | 34 | 92 | 34 | 58CRV |
| ACTW08-368B | 14T Wood Plunge Cutting Blade 68mm | 68 | 92 | 34 | 58CRV |

ADVANCEPOWER

## METAL PLUNGE CUTTING BLADE






ACTW08-310C　ACTW08-320C　ACTW08-334C　ACTW08-387C

| Model | Product Name | Work Length (mm) | Overall Length (mm) | Width (mm) | Material |
|---|---|---|---|---|---|
| ACTW08-310C | Metal Plunge Cutting Blade 10mm | 10 | 92 | 34 | BIM (M42+D6A) |
| ACTW08-320C | Metal Plunge Cutting Blade 20mm | 20 | 92 | 34 | BIM (M42+D6A) |
| ACTW08-334C | Metal Plunge Cutting Blade 34mm | 34 | 92 | 34 | BIM (M42+D6A) |
| ACTW08-387C | Metal Segmented Cutting Blade 87mm | 87 | / | / | BIM (M42+D6A) |

## REMOVAL BLADE & RASP

Rasps and removes mortar, tile adhesive and carpet remains. Also for rough grinding and smoothening of painter's filling, tile adhesive, concrete, stone, wood.



ACTW08-064C



ACTW08-087C



ACTW08-080C



ACTW08-035C

| Model | Product Name | Work Length (mm) | Overall Length (mm) | Width (mm) | Material |
|---|---|---|---|---|---|
| ACTW08-064C | Carbide Grit 64mm Grout Removal Blade | 64 | / | / | YG8 |
| ACTW08-087C | Carbide Grit 87mm Grout Removal Blade | 87 | / | / | YG8 |
| ACTW08-080C | Carbide Grit 80mm Delta Rasp | 80 | / | / | YG8 |
| ACTW08-035C | Carbide Grit 35mm Finger Rasp | 34 | / | / | YG8 |

## DIAMOND GRIT GROUT REMOVAL BLADE

Mills joints of tiles with a cutting width of 1.3 mm up to a cutting depth of 12 mm. Ideal for working into the corners, plunging into the material and working on flush surfaces.



ACTW08-087D



ACTW08-064D



| Model | Product Name | Work Length (mm) | Overall Length (mm) | Width (mm) | Material |
|---|---|---|---|---|---|
| ACTW08-087D | Diamond Grit 87mm Grout Removal Blade | 87 | / | / | YG8 |
| ACTW08-064D | Diamond Grit 64mm Grout Removal Blade | 64 | / | / | YG8 |

## SANDING PAD & SANDPAPER

Aluminium oxide sandpaper for wood and metal in various grits, sandpaper for wood and paint, scouring pads for matt finishing and smoothing of wood fibres, felt polishing wheels for polishing wood, metal, non-ferrous metals.



ACTW08-093P



ACTW08-093SP



| Model | Product Name | Work Length (mm) | Overall Length (mm) | Width (mm) | Material |
|---|---|---|---|---|---|
| ACTW08-093P | 93mm Delta Sanding Pad Perforated | 93 | / | / | YG8 |
| ACTW08-093SP | 93mm Delta Sandpaper Sheet | 93 | / | / | 60/80/120/180/240 |



## HCS SCRAPER BLADE

For scraping of soft materials, silicone or acrylic joints, residual glue from bonding, paint residues.



ACTW08-050S



ACTW08-052S



| Model | Product Name | Work Length (mm) | Overall Length (mm) | Width (mm) | Material |
|---|---|---|---|---|---|
| ACTW08-050S | HCS Rigid Scraper Blade | 51.7 | / | / | 58CRV |
| ACTW08-052S | HCS Flexible Scraper Blade | 51.7 | / | / | 58CRV |

## HCS SCRAPER BLADE



ACTW08-003A



ACTW08-003B



ACTW08-005A

| Model | Sizes(mm) | Teeth | Pitch (mm) | Width (mm) | Material |
|---|---|---|---|---|---|
| ACTW08-003A | (Wood)34mm*1pc, 20mm*1pc (HCS)34mm*1pc | 18 | 1.4 | / | CRV |
| ACTW08-003B | 34mm*1pc 68mm*1pc 87mm*1pc | 18 | 1.4 | / | M42+D6A |
| ACTW08-005A | 5pcs Multi Saw Blades Set | 18 | 1.4 | / | M42+D6A |

## 17PCS MULTI SAW BLADES SET



| Model | ACTW08-017A |
|---|---|
| Sizes(mm) | 87mm CRV Semi-circle Wood Plunge Cutting Blade , 1pc . |
| | 80mm Sanding pad, 1pc |
| | 80mm Red Delta Sandpaper Sheet ,Grit: 60/80/120/180/240 each 2pc, |
| | 34mm Wood Plunge Cutting Blade ,1pc |
| | 34mm 14T Wood Plunge Cutting Blade, 1pc |
| | 34mm Metal Plunge Cutting Blade, 1pc |
| | HCS Rigid Scraper Blade, 1pc |
| | HCS Flexible Scraper Blade, 1pc |
| Packaging | Double Blister |

## 8PCS MULTI SAW BLADES SET



| Model | ACTW08-008A |
|---|---|
| Sizes(mm) | 34mm Wood Plunge Cutting Blade ,2pc. |
| | 34mm 14T Wood Plunge Cutting Blade, 1pc |
| | 34mm Metal Plunge Cutting Blade, 1pc |
| | 44mm Metal Plunge Cutting Blade, 1pc |
| | 68mm 14T Wood Plunge Cutting Blade, 1pc |
| | 68mm Wood Plunge Cutting Blade ,1pc. |
| | 87mm HSS Semi-circle Metal Plunge Cutting Blade , 1pc |
| Packaging | Double Blister |




## METAL CUTTING BLADE

T-shank | HSS/M2 | SHEET METAL | coarse curve | coarse straight

Metal Jig saw Blade makes straight cuts in metal. Its milled, wavy-set teeth are ideal for cuts without special requirements. The fully hardened, high-grade HSS (high-speed steel) blade material is appropriate for cutting standard-strength, non-perforated metal sheets. For use with jigsaws with T-Shank clamping systems.




AJSB-T118A




AJSB-T118B




AJSB-T118G





AJSB-T127D

| Model | Product Name | Overall Length (mm) | work length (mm) | Tooth Pitch | Material |
|---|---|---|---|---|---|
| AJSB-T118A | Metal Cutting Blades | 76 | 50 | 1.2mm-21TPI | HSS-M2 |
| AJSB-T118B | Metal Cutting Blades | 76 | 50 | 2mm-12TPI | HSS-M2 |
| AJSB-T118G | Metal Cutting Blades | 76 | 50 | 0.8mm-32TPI | HSS-M2 |
| AJSB-T127D | Aluminum Cutting Blades | 100 | 75 | 3mm-8TPI | HSS-M2 |

## WOOD CUTTING BLADE

T-shank | HCS/SK5 | WOOD | fine curve | straight clean

Wood Jig saw Blade delivers clean straight cuts in wood. Its precision-ground teeth with a taper-ground body enable spotless results. Made of high carbon steel, this blade is appropriate for cutting softwood and non-abrasive woodworking materials. For use with jigsaws with T-Shank clamping systems.




AJSB-T101B




AJSB-T101D




AJSB-T101BR




AJSB-T101AO




AJSB-T301CD




AJSB-T301DL

| Model | Product Name | Overall Length (mm) | work length (mm) | Tooth Pitch | Material |
|---|---|---|---|---|---|
| AJSB-T101B | Clean Cutting Blade | 100 | 75 | 2.5mm-10TPI | HCS-SK5 |
| AJSB-T101D | Clean Cutting Blade | 100 | 75 | 4mm-6TPI | HCS-SK5 |
| AJSB-T101BR | Reverse-tooth，Clean Cutting Blade | 100 | 75 | 2.5mm-10TPI | HCS-SK5 |
| AJSB-T101AO | Fast Curved Cutting Blade | 76 | 50 | 20TPI | HCS-SK5 |
| AJSB-T301CD | Clean Cutting Blade | 116 | 90 | 3mm-8TPI | HCS-SK5 |
| AJSB-T301DL | Wood Cutting Blades | 132 | 106 | 4mm-6TPI | HCS-SK5 |

## WOOD CUTTING BLADE

T-shank · HCS/SK5 · WOOD · coarse curve · coarse straight

Wood Jig saw Blade delivers clean straight cuts in wood. Its precision-ground teeth with a taper-ground body enable spotless results. Made of high carbon steel, this blade is appropriate for cutting softwood and non-abrasive woodworking materials. For use with jigsaws with T-Shank clamping systems.



AJSB-T144D | AJSB-T111C | AJSB-T344D | AJSB-T119BO | AJSB-T119B | AJSB-T144DP

| Model | Product Name | Overall Length (mm) | work length (mm) | Tooth Pitch | Material |
|---|---|---|---|---|---|
| AJSB-T144D | Fast Cutting Blade | 100 | 75 | 4mm-6TPI | HCS-SK5 |
| AJSB-T111C | Fast Cutting Blade | 100 | 75 | 3mm-8TPI | HCS-SK5 |
| AJSB-T344D | Fast Cutting Blade | 132 | 106 | 4mm-6TPI | HCS-SK5 |
| AJSB-T119BO | Fast Curved Cutting Blade | 76 | 50 | 2mm-12TPI | HCS-SK5 |
| AJSB-T119B | Wood Cutting Blades | 76 | 50 | 2mm-12TPI | HCS-SK5 |
| AJSB-T144DP | Wood Cutting Blades | 100 | 75 | 4mm-6TPI | HCS-SK5 |

## 10PCS JIG SAW BLADE SET




| Model | AJSB01-0010 |
|---|---|
| Sizes(mm) | 100mm 6T Fast Cutting Blade, 1pc |
| | 100mm 6T Fast Cutting Blade, 1pc |
| | 100mm 8T Fast Cutting Blade, 1pc |
| | 100mm 10T Clean Cutting Blade, 1pc |
| | 100mm 10T Reverse-tooth，Clean Cutting Blade, 1pc |
| | 76mm 20T Fast Curved Cutting Blade, 1pc |
| | 76mm Rigid Scraper Blade, 1pc |
| | 100mm 8T Metal Cutting Blades, 1pc |
| | 76mm 12T Metal Cutting Blades, 1pc |
| | 76mm 21T Metal Cutting Blades, 1pc |

## 16PCS JIG SAW BLADE SET




| Model | AJSB01-0016 | |
|---|---|---|
| Sizes(mm) | T111C | 100mm 8T Fast Cutting Blade, 2pcs |
| | T144D | 100mm 6T Fast Cutting Blade, 1pc |
| | T244D | 100mm 6T Fast Cutting Blade, 1pc |
| | T101B | 100mm 10T Clean Cutting Blade, 2pcs |
| | T101B | 100mm 10T Reverse-tooth，Clean Cutting Blade, 2pcs |
| | T101BSP | 100mm 21T Reverse-tooth，Clean Cutting Blade, 1pc |
| | T119BO | 76mm, 12T Fast Curved Cutting Blade, 1pc |
| | T101AO | 76mm, 20T Fast Curved Cutting Blade, 1pc |
| | T118A | 76mm, 12T Metal Cutting Blades, 2pcs |
| | T118B | 76mm, 21T Metal Cutting Blades, 2pcs |
| | T218A | 76mm, 21T Metal Cutting Blades, 1pc |

## 5PCS JIG SAW BLADE SET

WOOD · straight cuts · coarse straight · coarse straight · coarse straight · coarse curve · fine curve

T-shank




| Model | AJSB01-005A |
|---|---|
| Sizes(mm) | T119BO 76mm 12T Fast Curved Cutting Blade, 1pc |
| | T244D 100mm 6T Fast Cutting Blade, 1pc |
| | T144D 100mm 6T Fast Cutting Blade, 1pc |
| | T111C 100mm 8T Fast Cutting Blade ,1pc |
| | T101B 100mm 10T Clean Cutting Blade, 1pc |

## 5PCS JIG SAW BLADE SET

WOOD · METAL · straight cuts · coarse straight · coarse straight · coarse straight · coarse curve · fine curve

T-shank




| Model | AJSB01-005B |
|---|---|
| Sizes(mm) | T119BO 76mm 12T Fast Curved Cutting Blade, 1pc |
| | T111C 100mm 8T Fast Cutting Blade, 1pc |
| | T144D 100mm 6T Fast Cutting Blade, 1pc |
| | T127D 100mm 8T Aluminum Cutting Blades,1pc |
| | T118A 76mm 21T Metal Cutting Blades, 1pc |

## 20PCS JIG SAW BLADE SET




| Model | AJSB01-0020 |
|---|---|
| Sizes(mm) | T101B 100mm 10T Clean Cutting Blade, 5pcs |
| | T111C 100mm 8T Fast Cutting Blade, 5pcs |
| | T118A 76mm 21T Metal Cutting Blades, 5pcs |
| | T119BO 76mm 12T Fast Curved Cutting Blade, 5pcs |



## METAL CUTTING RECIPROCATING SAW BLADES

BiMetal M2+D6A | SHEET METAL | METAL

Metal Reciprocating Saw Blade delivers cuts in metal. Its milled, side-set teeth enable cuts without special requirements. Moreover, the HSS-M2 blade is engineered for endurance when cutting regular-strength steel materials. For use with reciprocating saws with 1/2 inch universal shank systems.


ARSB-S918BF


ARSB-S1025VF


ARSB-S922EF


ARSB-S922BF


ARSB-S711EF


ARSB-S1122HF

| Model | Product Name | Overall Length (mm) | work length (mm) | Tooth Pitch | Material |
|---|---|---|---|---|---|
| ARSB-S918BF | Metal Cutting Reciprocating Saw Blades | 152 | 130 | 1.8mm-14TPI | BIM-(6150+M2) |
| ARSB-S1025VF | Metal Cutting Reciprocating Saw Blades | 200 | 178 | 1.8-2.6mm-14-10TPI | BIM-(M2+D6A) |
| ARSB-S922EF | Metal Cutting Reciprocating Saw Blades | 152 | 130 | 1.4mm-18TPI | BIM-(6150+M2) |
| ARSB-S922BF | Metal Cutting Reciprocating Saw Blades | 152 | 130 | 1.8mm-14TPI | BIM-(6150+M2) |
| ARSB-S711EF | Metal Cutting Reciprocating Saw Blades | 150 | 130 | 1.4mm-18TPI | BIM-(6150+M2) |
| ARSB-S1122HF | Metal Cutting Reciprocating Saw Blades | 228 | 205 | 2.5mm-10TPI | BIM-(M2+D6A) |

## METAL CUTTING RECIPROCATING SAW BLADES

58CrV | WOOD | PRUNING

Wood Reciprocating Saw Blade makes cuts in wood. Its milled, side-set teeth enable cuts without special requirements. Made of HCS (high carbon steel), the blade is appropriate for cutting firewood, nail-free coarse wood and green wood. For use with reciprocating saws with 1/2 inch universal shank systems.


ARSB-S1111K


ARSB-S1617K



ARSB-S644D


ARSB-S1531L

| Model | Product Name | Overall Length (mm) | work length (mm) | Tooth Pitch | Material |
|---|---|---|---|---|---|
| ARSB-S1111K | Wood Cutting Reciprocating Saw Blade | 230 | 205 | 8.5mm-3TPI | 58CRV |
| ARSB-S1617K | Wood Cutting Reciprocating Saw Blade | 300 | 278 | 8.5mm-3TPI | 58CRV |
| ARSB-S644D | Wood Cutting Reciprocating Saw Blade | 152 | 130 | 4mm-6TPI | 58CRV |
| ARSB-S1531L | Wood Cutting Reciprocating Saw Blade | 230 | 208 | 5mm-5TPI | 58CRV |



## CEMENT BRICK CUTTING SAW BLADE

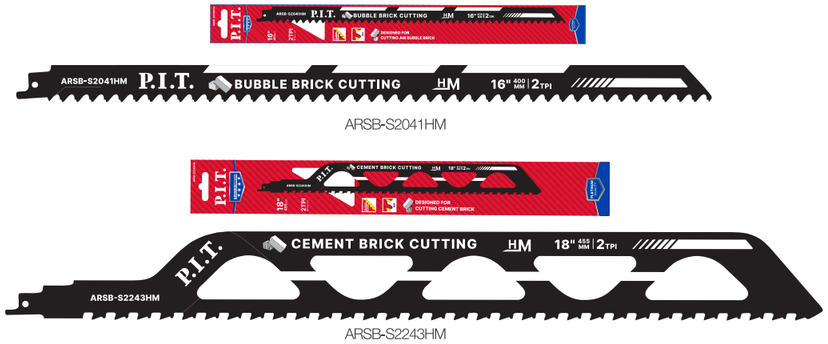


| Model | Product Name | Overall Length (mm) | work length (mm) | Tooth Pitch | Material |
|---|---|---|---|---|---|
| ARSB-S2041HM | Air bubble brick cutting saw blade | 375 | 350 | 12.6mm-2TPI | HM |
| ARSB-S2243HM | Cement brick cutting saw blade | 410 | 365 | 12.7mm-2TPI | HM |

## 2PCS CARBIDE RECIPROCATING SAW BLADES

5X FASTER CUTS | 50X LONGER LIFE | CARBIDE TEETH | WOOD | WOOD NAILS | PVC PIPE | SHEET METAL

Wood Reciprocating Saw Blade makes cuts in wood. Its milled, side-set teeth enable cuts without special requirements. Made of HCS (high carbon steel), the blade is appropriate for cutting firewood, nail-free coarse wood and green wood. For use with reciprocating saws with 1/2 inch universal shank systems.


ARSB-0606A


ARSB-0903A


ARSB-0906A


ARSB-1203A


ARSB-1206A

| Model | Product Name | Overall Length (mm) | work length (mm) | Tooth Pitch | Material |
|---|---|---|---|---|---|
| ARSB-0606A | Wood Cutting Reciprocating Saw Blade | 152 | 127 | 4.3mm-6TPI | 58CRV |
| ARSB-0903A | Wood Cutting Reciprocating Saw Blade | 228 | 203 | 8mm-3TPI | 58CRV |
| ARSB-0906A | Wood Cutting Reciprocating Saw Blade | 228 | 203 | 4.3mm-6TPI | 58CRV |
| ARSB-1203A | Wood Cutting Reciprocating Saw Blade | 300 | 275 | 8mm-3TPI | 58CRV |
| ARSB-1206A | Wood Cutting Reciprocating Saw Blade | 300 | 275 | 4.3mm-6TPI | 58CRV |

DRUAPOWER

## CEMENT BRICK CUTTING SAW BLADE

2X FASTER CUTS | 3X LONGER LIFE | SHEET METAL | WOOD | PRUNING | SMOOTHER CUTTING




| Model | Product Name | Overall Length (mm) | work length (mm) | Tooth Pitch | Material |
|---|---|---|---|---|---|
| ARSB-1506A | Air bubble brick cutting saw blade | 370 | 345 | 4.3mm-6TPI | 58CRV |

ADVANCEPOWER

## 2PCS STAINLESS STEEL RECIPROCATING SAW BLADE

FROZEN MATERIAL | BONE

Wood Reciprocating Saw Blade makes cuts in wood. Its milled, side-set teeth enable cuts without special requirements. Made of HCS (high carbon steel), the blade is appropriate for cutting firewood, nail-free coarse wood and green wood. For use with reciprocating saws with 1/2 inch universal shank systems.




ARSB-1203B




ARSB-0905B

| Model | Product Name | Overall Length (mm) | work length (mm) | Tooth Pitch | Material |
|---|---|---|---|---|---|
| ARSB-1203B | Carbide Reciprocating Saw Blades | 300 | 279 | 8.5mm-3TPI | 3CR13 |
| ARSB-0905B | Carbide Reciprocating Saw Blades | 240 | 215 | 4mm-6TPI | 3CR13 |



ADVANCEPOWER

## 2PCS STAINLESS STEEL RECIPROCATING SAW BLADE

3X LONGER LIFE | BiMetal M2+D6A | SHEET METAL | METAL

Wood Reciprocating Saw Blade makes cuts in wood. Its milled, side-set teeth enable cuts without special requirements. Made of HCS (high carbon steel), the blade is appropriate for cutting firewood, nail-free coarse wood and green wood. For use with reciprocating saws with 1/2 inch universal shank systems.




ARSB-0614C




ARSB-0618C




ARSB-0914C

| Model | Product Name | Overall Length (mm) | work length (mm) | Tooth Pitch | Material |
|---|---|---|---|---|---|
| ARSB-0614C | Metal Cutting Reciprocating Saw Blades | 150 | 125 | 1.8mm-14TPI | M42+D6A |
| ARSB-0618C | Metal Cutting Reciprocating Saw Blades | 150 | 125 | 1.4mm-18TPI | M42+D6A |
| ARSB-0914C | Metal Cutting Reciprocating Saw Blades | 230 | 205 | 1.8mm-14TPI | M42+D6A |

ADVANCEPOWER

## RECIPROCATING SAW BLADE WITH HANDLE SET




| Model | ARSB01-0003 |
|---|---|
| Sizes(mm) | Reciprocating Saw Blade With Handle, 1pc |
| | 152mm 18T Metal Cutting Reciprocating Saw Blades, 1pc |
| | 152mm 10-14T Metal Cutting Reciprocating Saw Blades, 1pc |

ADVANCEPOWER

## 12PCS RECIPROCATING SAW BLADES




| Model | ARSB01-012A |
|---|---|
| Sizes(mm) | 150mm 24T Metal Cutting Reciprocating Saw Blades, 3pcs |
| | 150mm 10T Wood Cutting Reciprocating Saw Blade, 3pcs |
| | 150mm 6T Wood Cutting Reciprocating Saw Blade, 3pcs |
| | 228mm 10T Wood Cutting Reciprocating Saw Blade, 3pcs |






ADVANCEPOWER

## PLANER BLADE

HSS ANGLE OF CUTTING EDGE 35°

HSS and tungsten carbide Planer Blades, with 2 cutting edges, straight, precision ground, special carbide, for planing in cabinet making and interior work, for planing hard- and softwoods, to fit all market-leading electric planers




APLS09-082A




APLS09-102A




APLS09-M082A




APLS09-110A

| Model | Size (mm) | Overall Length (mm) | Width (mm) | Angle | Material |
|---|---|---|---|---|---|
| APLS09-082A | 82x5.5 | 82 | 5.5 | 35° | HSS |
| APLS09-082B | 82x5.5 | 82 | 5.5 | 35° | TCT |
| APLS09-102A | 102x5.5 | 102 | 5.5 | 35° | HSS |
| APLS09-102B | 102x5.5 | 102 | 5.5 | 35° | TCT |
| APLS09-M082A | 82x29 | 82 | 29 | 38° | HSS |
| APLS09-M082B | 82x29 | 82 | 29 | 38° | TCT |
| APLS09-110A | 110x29 | 110 | 29 | 38° | HSS |

ADVANCEPOWER

## 5PCS ROUTER BIT SET




| Model | ACTW09-005A |
|---|---|
| Sizes(mm) | Mortising Bit:12.7mm |
| | Dovetail:12.7mm |
| | Straight Bit:19mm |
| | Cove Bit:35mm |
| | Slotting Bit:31.8mm |

ADVANCEPOWER

## 6PCS ROUTER BIT SET




| Model | ACTW09-006A |
|---|---|
| Sizes(mm) | Round Over Bit:R3,R4,R5,R6,R8,R10 |




## ACCESSORIES BRUSHING AND ABRASIVE




























## ABRASIVES GRINDING DISCS

2X LONG LIFE · INOX STEEL

Grinding discs for metal, BF bonding, aluminium oxide abrasive, high quality discs for long-term professional use, for all standard angle grinders with peripheral disc speed of 80 m/s.

| Model | Diameter (mm) | Bore (mm) | Thickness (mm) |
|---|---|---|---|
| APLS02-0100 | 100 | 16 | 6 |
| APLS02-0115 | 115 | 22.23 | 6 |
| APLS02-0125 | 125 | 22.23 | 6 |
| APLS02-0150 | 150 | 22.23 | 6 |
| APLS02-0180 | 180 | 22.23 | 6 |
| APLS02-0230 | 230 | 22.23 | 6 |
| APLS02-7606 | 76 | 10 | 6 |




## FLAP DISC ALUMINUM OXIDE

2X LONG LIFE · INOX STEEL

Abrasive Flap Discs for metal, aluminum oxide abrasive coated, large number of leaves for optimal grinding performance, for long-term professional use, for all standard angle grinders with peripheral disc speed of 80 m/s.

| Model | Diameter (mm) | Bore (mm) | Grit | Material |
|---|---|---|---|---|
| APLS01-10040 | 100 | 16 | P40 | Aluminum Oxide |
| APLS01-10060 | 100 | 16 | P60 | Aluminum Oxide |
| APLS01-10080 | 100 | 16 | P80 | Aluminum Oxide |
| APLS01-10010 | 100 | 16 | P100 | Aluminum Oxide |
| APLS01-10012 | 100 | 16 | P120 | Aluminum Oxide |
| APLS01-11540 | 115 | 22.23 | P40 | Aluminum Oxide |
| APLS01-11560 | 115 | 22.23 | P60 | Aluminum Oxide |
| APLS01-11580 | 115 | 22.23 | P80 | Aluminum Oxide |
| APLS01-11512 | 115 | 22.23 | P120 | Aluminum Oxide |
| APLS01-12540 | 125 | 22.23 | P40 | Aluminum Oxide |
| APLS01-12560 | 125 | 22.23 | P60 | Aluminum Oxide |
| APLS01-12580 | 125 | 22.23 | P80 | Aluminum Oxide |
| APLS01-12512 | 125 | 22.23 | P120 | Aluminum Oxide |
| APLS01-18040 | 180 | 22.23 | P40 | Aluminum Oxide |
| APLS01-18060 | 180 | 22.23 | P60 | Aluminum Oxide |
| APLS01-18080 | 180 | 22.23 | P80 | Aluminum Oxide |
| APLS01-18012 | 120 | 22.23 | P120 | Aluminum Oxide |




## ZIRCONIA FLAP DISCS

3X LONG LIFE · INOX STEEL

Abrasive Flap Discs for metal, aluminum oxide abrasive coated, large number of leaves for optimal grinding performance, for long-term professional use, for all standard angle grinders with peripheral disc speed of 80 m/s.




| Model | Diameter (mm) | Bore (mm) | Grit | Material |
|---|---|---|---|---|
| APLS26-12540 | 125 | 22.23 | P40 | Zirconia |
| APLS26-12560 | 125 | 22.23 | P60 | Zirconia |
| APLS26-12580 | 125 | 22.23 | P80 | Zirconia |
| APLS26-12512 | 125 | 22.23 | P120 | Zirconia |
| ASET14-0003 (3pcs) | 125 | 22.23 | P40+P80+P120 | Zirconia |

## STRIP DISC




2X LONG LIFE INOX STEEL

Polycarbide cleaning discs, nylon backing, bonded to silicon carbide abrasive, working width 13 mm, for precise working up to edges with the edge or the face of the disc, flexible, for sanding and cleaning of steel, sheet metal, wood, plastics and stone, for all common angle grinders with peripheral disc speed of 80 m/s.



| Model | Diameter (mm) | Bore (mm) | Maximum Speed (RPM) |
|---|---|---|---|
| APLS18-0115 | 115 | 22.23 | 10400 |
| APLS18-0125 | 125 | 22.23 | 9600 |

## WOOD CARVING DISC



APLS14-A125



APLS14-BA125



APLS14-CA125

| Model | Diameter (mm) | Bore (mm) | Shape |
|---|---|---|---|
| APLS14-A125 | 125 | 22.23 | Flat |
| APLS14-BA125 | 125 | 22.23 | Indined |
| APLS14-CA125 | 125 | 22.23 | Arc |

## CUP BRUSH BRASS WIRE CRIMPED



MAX RPM 4500 | Ø0.3mm | 6.35mm | POLISHING

Cup brush, Copper-plated wire, corrosion-free, crimped,0.3mm diameter, for fine work cleaning, paint removing, polishing and matt finishing, for metal and stone, ideal for working on medium sized areas.Use with power drills.



| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS10-C050 | 50 | 0.3 | 6.35 |
| APLS10-C063 | 63 | 0.3 | 6.35 |
| APLS10-C075 | 75 | 0.3 | 6.35 |

## WHEEL BRASS BRUSH CRIMPED



MAX RPM 4500 | Ø0.3mm | 6.35mm | POLISHING

Wheel brush, High tensile steel wire, Copper-plated,corrosion-free, crimped, for fine work cleaning, paint removing, polishing and matt finishing, for metal and stone, ideal for working on narrow edges, frames, gratings and tubes.Use with power drills.



| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS10-F038 | 38 | 0.3 | 6.35 |
| APLS10-F050 | 50 | 0.3 | 6.35 |
| APLS10-F063 | 63 | 0.3 | 6.35 |
| APLS10-F075 | 75 | 0.3 | 6.35 |
| APLS10-F100 | 100 | 0.3 | 6.35 |



## TIGHT CORNER END BRASS WIRE BRUSH



MAX RPM 4500 | Ø0.3mm | 6.35mm | POLISHING

Tight corner end brush, High tensile steel wire, Copper-plated, crimped, for derusting, cleaning, removal of surface coatings, paint and excess rubber, descaling, smoothing, roughing up and matt finishing, for metal and stone, ideal for workingwith difficult shapes and interior surfaces, eg cast iron gates, grilles, gratings etc.



| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS10-D017 | 17 | 0.3 | 6.35 |
| APLS10-D024 | 24 | 0.3 | 6.35 |
| APLS10-D030 | 30 | 0.3 | 6.35 |

## CUP WIRE BRUSH TWIST KNOT



MAX RPM 4500 | Ø0.5mm | 6.35mm | POLISHING

High tensile crimped brass wire, Copper-plated, 0.5mm diameter, for rust and paint removal, descaling, deburring and preparation of welding seams. For metal and stone working, cleaning, surface preparation and fabrication tasks.



| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS10-A075 | 75 | 0.5 | 6.35 |

## WHEEL BRUSH EXTRA STRONG TWIST KNOT



MAX RPM 4500 | Ø0.5mm | 6.35mm | POLISHING

Wheel brush, High tensile steel wire,0.5mm diameter, twist knot, for extremely heavy jobs derusting, removing paint, clinker, scale and removing welding marks, for metal and wood, ideal for use on narrow edges, frames, posts, gratings and tubes.




| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS10-G075 | 75 | 0.5 | 6.35 |
| APLS10-G100 | 100 | 0.5 | 6.35 |

## CUP BRUSH NYLON



MAX RPM 4500 | Ø1.2mm | 6.35mm | POLISHING

Cup brush, nylon, aluminium oxide abrasive, flexible, for fine sanding, for cleaning, removing paint, varnish and welding discolouration, on stainless steel, for wood, metal, light alloy,non-ferrous metals, also suitable for surfacing wood, for working medium sized surfaces.

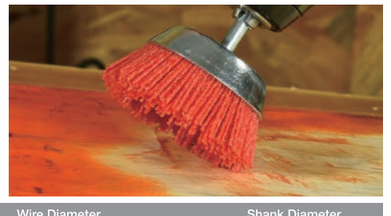

| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS11-CN50 | 50 | 1.2 | 6.35 |
| APLS11-CN75 | 75 | 1.2 | 6.35 |

## WHEEL BRUSH NYLON





Wheel brush, nylon, aluminium oxide abrasive, flexible, for fine sanding, for cleaning, removing paint, varnish and welding discolouration, on stainless steel, for wood, metal, light alloy, non-ferrous metals, also suitable for surfacing wood, for working on narrow edges, frames, grilles and curved objects.

| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS11-N075 | 75 | 1.2 | 6.35 |

## WIRE SCRATCH BRUSH



Easy to clean stubborn stains and where it needs strong scrubbing, easy to clean small places and narrowspaces without damaging the surface or fine features, saving time and energy for doing cleaning work.
Applications: great wire scratch brushes to remove the welding slag, rust, paint stains and clean machinery, unfinished metal parts, also can be used for cleaning doors, windows, floor, stairs, fence, etc.

| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS10-D250 | 250 | 0.3 | / |

## 3PCS WIRE BRUSH SET



Wheel brush, High tensile steel wire, Copper-plated,corrosion-free, crimped, for fine work cleaning, paint removing,polishing and matt finishing, for metal and stone, ideal for working on narrow edges, frames, gratings and tubes.

| Model | APLS10-0003 |
|---|---|
| Specifications | 25/50/50mm |
| | Handle Diameter: 6.35mm |
| Packaging | Double Blister |

## 5PCS WIRE BRUSH SET



| Model | APLS10-005A |
|---|---|
| Specifications | 25/50/50/75/75mm |
| | Handle Diameter: 6.35mm |
| Packaging | Double Blister |

## 5PCS BRASS COATED WIRE BRUSH SET



| Model | APLS10-005B |
|---|---|
| Specifications | 25/38/50/63/75mm |
| | Handle Diameter: 6.35mm |
| Packaging | Double Blister |



## BRASSED STEEL CRIMP CUP





High tensile crimped steel wire, Copper-plated，0.3mm diameter, for rust and paint removal, descaling, deburring and preparation of welding seams. For metal and stone working, cleaning, surface preparation and fabrication tasks.
Use with angle grinders. M14 x 2 female thread.

| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS12-M060 | 60 | 0.3 | M14 |
| APLS12-M075 | 75 | 0.3 | M14 |
| APLS12-M100 | 100 | 0.3 | M14 |
| APLS12-M125 | 125 | 0.3 | M14 |
| APLS12-M150 | 150 | 0.3 | M14 |

## BRASSED STEEL CRIMP BEVEL BRUSH





High tensile crimped steel wire, Copper-plated，0.3mm diameter, for rust and paint removal, descaling, deburring and preparation of welding seams. For metal and stone working, cleaning, surface preparation and fabrication tasks. Use with angle grinders. M14 x 2 female thread.

| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS12-P100 | 100 | 0.3 | M14 |
| APLS12-P115 | 115 | 0.3 | M14 |
| APLS12-P125 | 125 | 0.3 | M14 |

## STEEL TWIST-KNOT BOWL CUP





Cup Brush, High tensile crimped steel wire， twist knot, for derusting, removal of surface coatings, paint, heavy rust and floor coverings, cleaning of shuttering and facades, descaling, deburring, for metal and stone, for working on fairly large areas.

| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS12-R080 | 80 | 0.5 | M14 |
| APLS12-R100 | 100 | 0.5 | M14 |
| APLS12-R125 | 125 | 0.5 | M14 |

## STEEL TWIST-KNOT BRUSH





Cranked Brush,High tensile steel wire, twist knot, cropped, for derusting, removal of surface coatings,paint, heavy rust and floor coverings, removing welding marks, descaling, deburring, for metal and stone, for working on narrow edges, frames, gratings and difficult- to-reach areas.

| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS12-Q100 | 100 | 0.5 | M14 |
| APLS12-Q115 | 115 | 0.5 | M14 |
| APLS12-Q125 | 125 | 0.5 | M14 |

## STEEL TWIST-KNOT WHEEL





Wheel Brush, High tensile steel wire, twist knot, for derusting, removal of surface coatings, paint, heavy rust and floor coverings, descaling, deburring and removing of welding marks, for metal and stone, for working on narrow edges, frames and gratings

| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS12-S100 | 100 | 0.5 | M14 |
| APLS12-S125 | 125 | 0.5 | M14 |

## STEEL TWIST-KNOT WHEEL





Wheel Brush, High tensile steel wire, twist knot, for derusting, removal of surface coatings, paint, heavy rust and floor coverings, descaling, deburring and removing of welding marks, for metal and stone, for working on narrow edges, frames and gratings

| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS12-T100 | 100 | 0.5 | 22.23 |
| APLS12-T125 | 125 | 0.5 | 22.23 |

## STEEL WHEEL BRUSH





High tensile steel wire, applicable for deburring, rust, scale and carbon removal, edge blending, roughening for adhesion, finishing for appearance and cleaning/polishing.Designed for efficient brushing action in confined or hard-to-reach areas.

| Model | Diameter (mm) | Wire Diameter (mm) | Shank Diameter (mm) |
|---|---|---|---|
| APLS12-U100 | 100 | 0.3 | 22.23 |
| APLS12-U125 | 125 | 0.3 | 22.23 |

## MOUNTED GRINDING POINTS

Mounted Grinding Points, Aluminium oxide, for removing ridges, welding spatter, fine surface grinding, for metal, glass, ceramics and plastics, for use in drills and die grinders, max. RPM 23 000.



APLS15-CR25



APLS15-D040



APLS15-S025

| Model | Product Name | Size (mm) | Work Length (mm) | Shank Diameter (mm) |
|---|---|---|---|---|
| APLS15-CR25 | Mounted Grinding Points, Conical, rounded Point | 25 | 30 | 6 |
| APLS15-D040 | Mounted Grinding Points, Disc | 40 | 10 | 6 |
| APLS15-S025 | Mounted Grinding Points, Spherical | 25 | / | / |

## 5PCS MOUNTED GRINDING POINTS SET






Wheel brush, High tensile steel wire, Copper-plated,corrosion-free, crimped, for fine work cleaning, paint removing,polishing and matt finishing, for metal and stone, ideal for working on narrow edges, frames, gratings and tubes.

| Model | APLS15-05PC |
|---|---|
| Sizes(mm) | 68x25mm Mounted Grinding Points, Conical, Pointed , 1pc |
| | 55x18mm Mounted Grinding Points, Cylindrical, Pointed, 1pc |
| | 55x14mm Mounted Grinding Points, Conical, Pointed, 1pc |
| | 43x25mm Mounted Grinding Points, Cylindrical, 1pc |
| | 55x25mm Mounted Grinding Points, Spherical, 1pc |

## ROTARY TOOL ACCESSORY KIT

The accessories for sanding, carving, deburring, cutting, drilling, grinding, polishing, engraving, as well as many other verbs.




| Model | Product Name | Size (pieces) |
|---|---|---|
| ASET11-0071 | Rotary Tool Accessory Kit | 71 |

## WOOD ROTARY RASP FILE

The accessories for sanding, carving, deburring, cutting, drilling, grinding, polishing, engraving, as well as many other applications







APLS13-05PC






APLS13-05PC

| Model | Product Name | Total length (mm) | Shank Diameter (mm) | Hardness |
|---|---|---|---|---|
| APLS13-05PC | 5pcs Wood Rotary Rasp File Set | 55-58 | 6.3 | HRC45-55 |
| APLS13-10PC | 10pcs Wood Rotary Rasp File Set | 55-58 | 6.3 | HRC45-55 |

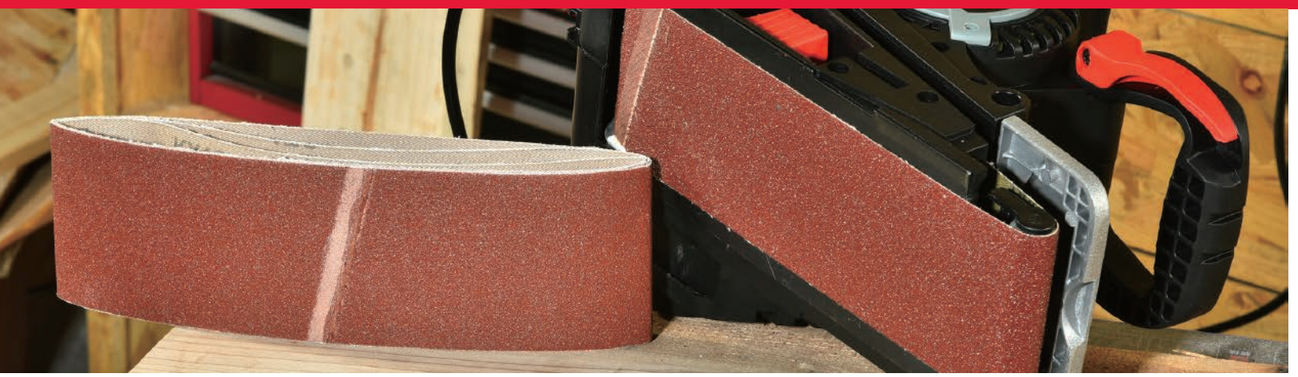




## SANDING SHEETS

2X EFFICIENT · POLISHING · 3X

Sanding Sheets for WOOD & METAL, aluminium oxide abrasive coated, for derusting, paint, varnish and filler. For orbital sanders.

| Model | Size (mm) | Grit | Holes | Bonded |
|---|---|---|---|---|
| APLS03-N0040 | 115*280 | P40 | N/A | Clip |
| APLS03-N0060 | 115*280 | P60 | N/A | Clip |
| APLS03-N0080 | 115*280 | P80 | N/A | Clip |
| APLS03-N0100 | 115*280 | P100 | N/A | Clip |
| APLS03-N0120 | 115*280 | P120 | N/A | Clip |
| APLS03-N0180 | 115*280 | P180 | N/A | Clip |
| APLS03-N0320 | 115*280 | P320 | N/A | Clip |





## QUICK-STICK SANDING SHEET

2X EFFICIENT · POLISHING · 3X

Sanding Sheets for wood and metal, universal punching, aluminium oxide abrasive coated , for derusting, paint, varnish, and filler. For orbital sanders with dust extraction.

| Model | Size (mm) | Grit | Holes | Bonded |
|---|---|---|---|---|
| APLS04-E0040 | 93*230 | P40 | 8 | Hook-and-loop |
| APLS04-E0060 | 93*230 | P60 | 8 | Hook-and-loop |
| APLS04-E0080 | 93*230 | P80 | 8 | Hook-and-loop |
| APLS04-E0100 | 93*230 | P100 | 8 | Hook-and-loop |
| APLS04-E0120 | 93*230 | P120 | 8 | Hook-and-loop |
| APLS04-E0180 | 93*230 | P180 | 8 | Hook-and-loop |
| APLS04-E0320 | 93*230 | P320 | 8 | Hook-and-loop |





## QUICK-STICK SANDING SHEET

2X EFFICIENT · POLISHING · 3X

Sanding Sheets for wood and metal, universal punching, aluminium oxide abrasive coated , for derusting, paint, varnish, and filler. For orbital sanders with dust extraction.

| Model | Size (mm) | Grit | Holes | Bonded |
|---|---|---|---|---|
| APLS04-F0040 | 115*280 | P40 | 14 | Hook-and-loop |
| APLS04-F0060 | 115*280 | P60 | 14 | Hook-and-loop |
| APLS04-F0080 | 115*280 | P80 | 14 | Hook-and-loop |
| APLS04-F0100 | 115*280 | P100 | 14 | Hook-and-loop |
| APLS04-F0120 | 115*280 | P120 | 14 | Hook-and-loop |




## QUICK-STICK ABRASIVE SANDING DISCS


2X EFFICIENT · POLISHING

For sanding metal and wood, paint, varnish, filler, stone and plastics.
aluminium oxide coated, resin bonded, strong backing material, with Hook-and-loop fabric backing;



| Model | Size (mm) | Grit | Holes | Bonded |
|---|---|---|---|---|
| APLS05-N0040 | 150 | P40 | N/A | Hook-and-loop |
| APLS05-N0060 | 150 | P60 | N/A | Hook-and-loop |
| APLS05-N0080 | 150 | P80 | N/A | Hook-and-loop |
| APLS05-N0100 | 150 | P100 | N/A | Hook-and-loop |
| APLS05-N0120 | 150 | P120 | N/A | Hook-and-loop |
| APLS05-N0180 | 150 | P180 | N/A | Hook-and-loop |
| APLS05-N0320 | 150 | P320 | N/A | Hook-and-loop |
| APLS05-0180A | 125 | P180 | N/A | Hook-and-loop |
| APLS05-0320A | 125 | P320 | N/A | Hook-and-loop |
| APLS05-0600A | 125 | P600 | N/A | Hook-and-loop |
| APLS05-1000A | 125 | P1000 | N/A | Hook-and-loop |
| APLS05-0100B | 125 | P100 | N/A | Hook-and-loop |
| APLS05-0120B | 125 | P120 | N/A | Hook-and-loop |
| APLS05-0600B | 125 | P600 | N/A | Hook-and-loop |




## QUICK-STICK ABRASIVE SANDING DISCS

2X EFFICIENT · POLISHING

For sanding metal and wood, paint, varnish, filler, stone and plastics.
aluminium oxide abrasive coated,phenolic resin bonded, strong backing, with Hook-and-loop fabric backing, punched,for use with random orbit sanders;





| Model | Size (mm) | Grit | Holes | Bonded |
|---|---|---|---|---|
| APLS06-S0040 | 150 | P40 | 6 | Hook-and-loop |
| APLS06-S0060 | 150 | P60 | 6 | Hook-and-loop |
| APLS06-S0080 | 150 | P80 | 6 | Hook-and-loop |
| APLS06-S0100 | 150 | P100 | 6 | Hook-and-loop |
| APLS06-S0120 | 150 | P120 | 6 | Hook-and-loop |
| APLS06-S0180 | 150 | P180 | 6 | Hook-and-loop |
| APLS06-S0320 | 150 | P320 | 6 | Hook-and-loop |
| APLS06-S0600 | 150 | P600 | 6 | Hook-and-loop |
| APLS06-0040E | 125 | P40 | 6 | Hook-and-loop |
| APLS06-0060E | 125 | P60 | 6 | Hook-and-loop |
| APLS06-0080E | 125 | P80 | 6 | Hook-and-loop |
| APLS06-0100E | 125 | P100 | 6 | Hook-and-loop |
| APLS06-0120E | 125 | P120 | 6 | Hook-and-loop |
| APLS06-0320E | 125 | P320 | 6 | Hook-and-loop |

## QUICK-STICK DELTA SANDING DISCS

2X EFFICIENT · POLISHING

For sanding metal and wood, paint, varnish, filler, stone and plastics,93 mm, for use with delta/ detail sanders;



| Model | Size (mm) | Grit | Holes | Bonded |
|---|---|---|---|---|
| APLS07-D0040 | 93*93*93 | P40 | 6 | Hook-and-loop |
| APLS07-D0060 | 93*93*93 | P60 | 6 | Hook-and-loop |
| APLS07-D0080 | 93*93*93 | P80 | 6 | Hook-and-loop |
| APLS07-D0180 | 93*93*93 | P180 | 6 | Hook-and-loop |
| APLS07-D0320 | 93*93*93 | P320 | 6 | Hook-and-loop |

## SANDING BELTS

2X EFFICIENT · POLISHING

Sanding Belts, aluminium oxide abrasive coated, phenolic resin bonded, heavy, super-elastic cloth backing, special glueing, chatter- and flutter- free joint.






| Model | Size (mm) | Grit | Holes | Bonded |
|---|---|---|---|---|
| APLS08-0040A | 75x457 | P40 | N/A | Overlap |
| APLS08-0060A | 75x457 | P60 | N/A | Overlap |
| APLS08-0080A | 75x457 | P80 | N/A | Overlap |
| APLS08-0100A | 75x457 | P100 | N/A | Overlap |
| APLS08-0120A | 75x457 | P120 | N/A | Overlap |
| APLS08-0040B | 75x533 | P40 | N/A | Overlap |
| APLS08-0060B | 75x533 | P60 | N/A | Overlap |
| APLS08-0080B | 75x533 | P80 | N/A | Overlap |
| APLS08-0100B | 75x533 | P100 | N/A | Overlap |
| APLS08-0120B | 75x533 | P120 | N/A | Overlap |
| APLS08-0320B | 75x533 | P320 | N/A | Overlap |
| APLS08-0080D | 50x686 | P80 | N/A | Overlap |
| APLS08-0120D | 50x686 | P120 | N/A | Overlap |







## MESH SANDING DISCS

POLISHING

Fibre backed sanding discs, for metal, vulcanised backing, aluminium oxide abrasive coated, phenolic resin bonded, for heavy duty sanding and cleaning operations, for steel and metal, for removing rust, paint, scale and varnish, cleaning welding seams, for all commonly used angle grinders with peripheral disc speed of 80 m/s.







| Model | Size (mm) | Grit |
|---|---|---|
| APLS22-0080 | 225 | P80 |
| APLS22-0120 | 225 | P120 |
| APLS22-0240 | 225 | P240 |
| APLS22-0320 | 225 | P320 |

## SPONGE

POLISHING






APLS16-006D






APLS16-006E






APLS16-006F

| Model | Product Name | Type | Size (mm) | Thickness (mm) | Weight (g) | Bonded |
|---|---|---|---|---|---|---|
| APLS16-006D | Quick-Stick 6" Wave Polishing Sponge, White | Polishing | 150 | 25 | 40 | Hook-and-loop |
| APLS16-006E | Quick-Stick 6" Compounding Sponge, Yellow | Compounding | 150 | 50 | 50 | Hook-and-loop |
| APLS16-006F | Quick-Stick 6" Polishing Sponge, White | Polishing | 150 | 50 | 50 | Hook-and-loop |

## 6" SINGLE SIDE WOOL PADS, 100% WOOL

POLISHING · TEAR-RESISTANT

Polishing bonnet, genuine lambswool, with fabric backing, for use with backing pads with hook and loop fixing, for polishing wood, metal, plastics, marble, glass, acrylic and car bodywork.






| Model | Type | Size (mm) | Thickness (mm) | Weight (g) | Bonded |
|---|---|---|---|---|---|
| APLS16-006G | Cutting & Polishing | 150 | 25 | 150 | Hook-and-loop |

## QUICK-STICK BACKING PAD, FOR DRILL





Semi-flexible backing pad for use with hook and loop polishing sponges, bonnets and sanding Discs. Compatible with power Drills. Includes 6mm arbor.

| Model | Diameter (mm) | Shank Diameter (mm) | Material | Bonded |
|---|---|---|---|---|
| APLS17-115A | 115 | 8 | ABS | Round Shank |
| APLS17-125A | 125 | 8 | ABS | Round Shank |
| APLS17-150A | 150 | 8 | ABS | Round Shank |

## PAPER DISCS BACKING PAD, FOR ELECTRIC DRILL





Rubber backing pad with arbor, for use with sanding Discs with star hole on all standard mains and cordless Drills.

| Model | Diameter (mm) | Shank Diameter (mm) | Material | Bonded |
|---|---|---|---|---|
| APLS17-115B | 115 | 6 | PVC | Round Shank |
| APLS17-125B | 125 | 6 | PVC | Round Shank |

## PAPER DISCS BACKING PAD, FOR ANGLE GRINDERS





Rubber backing pad with M14 Thread, for use with sanding Discs with star hole on all M14 angle grinder.

| Model | Diameter (mm) | Shank Diameter (mm) | Material | Thread |
|---|---|---|---|---|
| APLS17-115C | 115 | M14x2.0 | ABS | M14 |
| APLS17-120C | 120 | M14x2.0 | ABS | M14 |

## BACKING PAD, FOR POLISHER





Firm backing pad for use with hook and loop polishing sponges, bonnets and sanding Discs. Compatible with angle grinders and sander Polishers.M14 x 2 female thread.

| Model | Diameter (mm) | Shank Diameter (mm) | Material | Thread |
|---|---|---|---|---|
| APLS17-125D | 125 | M14x2.0 | ABS | M14 |

## BACKING PAD, FOR POLISHER






| Model | Diameter (mm) | Shank Diameter (mm) | Material | Thread |
|---|---|---|---|---|
| APLS17-115E | 115mm | M14x2.0 | ABS | M14 |
| APLS17-125E | 125mm | M14x2.0 | ABS | M14 |
| APLS17-150E | 150mm | M14x2.0 | ABS | M14 |
| APLS17-180E | 180mm | M14x2.0 | ABS | M14 |

## DIAMOND FACE GRINDING CUP





APLS19-125A





APLS19-125B






APLS19-125C

| Model | Diameter (mm) | Bore (mm) | Segment Height (mm) | Disc Thickness (mm) |
|---|---|---|---|---|
| APLS19-125A | 125 | 22.23 | 5 | 3 |
| APLS19-125B | 125 | 22.23 | 5 | 3 |
| APLS19-125C | 125 | 22.23 | 5 | 3 |




## **ACCESSORIES** GARDEN TOOL



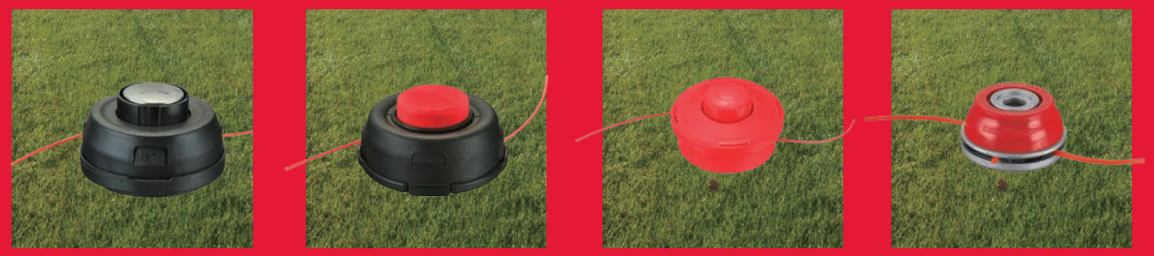









DRUAPOWER






## SAW CHAIN

2X LONG LIFE

Cutter and tie strap design reduces vibration levels significantly while the razor-edged, square-cornered cutter shape ensures minimum chain friction for an exceptionally smooth and clean cut in hard or frozen wood. Best suited for higher-powered chainsaws, Ideal for forestry and industry, including felling, bucking and limbing.




| Model | Type | Chain Pitch | Overall Length | Overall Length | Gauge (inch) | Blade Material | Saw Chain Material |
|---|---|---|---|---|---|---|---|
| ASCH01-1356S | Square Tooth | 0.325" | 13" | 56 | 0.058 | 8860 | 65Mn |
| ASCH01-1450S | Square Tooth | Low 3/8" | 14" | 50 | 0.050 | 8860 | 65Mn |
| ASCH01-1564S | Square Tooth | 0.325" | 15" | 64 | 0.058 | 8860 | 65Mn |
| ASCH01-1655S | Square Tooth | Low 3/8" | 16" | 55 | 0.050 | 8860 | 65Mn |
| ASCH01-1656S | Square Tooth | Low 3/8" | 16" | 56 | 0.050 | 8860 | 65Mn |
| ASCH01-1660S | Square Tooth | 3/8" | 16" | 60 | 0.058 | 8860 | 65Mn |
| ASCH01-1666S | Square Tooth | 0.325" | 16" | 66 | 0.058 | 8860 | 65Mn |
| ASCH01-1667S | Square Tooth | 0.325" | 16" | 67 | 0.063 | 8860 | 65Mn |
| ASCH01-1664S | Square Tooth | 0.325" | 16" | 64 | 0.058 | 8860 | 65Mn |
| ASCH01-1872S | Square Tooth | 0.325" | 18" | 72 | 0.058 | 8860 | 65Mn |
| ASCH01-1356R | Round Tooth | 0.325" | 13" | 56 | 0.058 | 8860 | 65Mn |
| ASCH01-1450R | Round Tooth | Low 3/8" | 14" | 50 | 0.050 | 8860 | 65Mn |
| ASCH01-1564R | Round Tooth | 0.325" | 15" | 64 | 0.058 | 8860 | 65Mn |
| ASCH01-1655R | Round Tooth | Low 3/8" | 16" | 55 | 0.050 | 8860 | 65Mn |
| ASCH01-1656R | Round Tooth | Low 3/8" | 16" | 56 | 0.050 | 8860 | 65Mn |
| ASCH01-1666R | Round Tooth | 0.325" | 16" | 66 | 0.058 | 8860 | 65Mn |
| ASCH01-1667R | Round Tooth | 0.325" | 16" | 67 | 0.063 | 8860 | 65Mn |
| ASCH01-1659R | Round Tooth | Low 3/8" | 16" | 59 | 0.05 | 8860 | 65Mn |

DRUAPOWER




## GUIDE BAR

Made of durable 65Mn materials for high performance with minimum vibration.Ideal for professionals working in demanding conditions.
Note: The same saw can have different bar lengths so ensure you confirm the pitch, gauge, & drive links on your current bar.




| Model | Chain Pitch | Overall Length | Driver links | Gauge (inch) | Driver Teeth | Guide Bar Material | Guide Bar Thickness(mm) | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|---|---|---|
| ASCH02-130A | 0.325" | 13" | 56 | 0.058 | 10 | 65Mn | 1.5-1.7 | 1 | Color Sleeve |
| ASCH02-140A | Low 3/8" | 14" | 50 | 0.050 | 9 | 65Mn | 1.3-1.5 | 1 | Color Sleeve |
| ASCH02-150A | 0.325" | 15" | 64 | 0.058 | 10 | 65Mn | 1.5-1.7 | 1 | Color Sleeve |
| ASCH02-160A | Low 3/8" | 16" | 55 | 0.050 | 9 | 65Mn | 1.3-1.5 | 1 | Color Sleeve |
| ASCH02-160B | Low 3/8" | 16" | 56 | 0.050 | 9 | 65Mn | 1.3-1.5 | 1 | Color Sleeve |
| ASCH02-160C | 3/8" | 16" | 60 | 0.058 | 11 | 65Mn | 1.5-1.7 | 1 | Color Sleeve |
| ASCH02-160D | 0.325" | 16" | 66 | 0.058 | 12 | 65Mn | 1.5-1.7 | 1 | Color Sleeve |
| ASCH02-160F | 3/8" | 16" | 59 | 0.05 | 9 | 55# | 1.3-1.5 | 1 | Color Sleeve |
| ASCH02-160G | 0.325" | 16" | 64 | 0.058 | 10 | 55# | 1.5-1.7 | 1 | Color Sleeve |
| ASCH02-180A | 0.325" | 18" | 72 | 0.058 | 10 | 55# | 1.5-1.7 | 1 | Color Sleeve |

## TRIMMER LINE

EFFICIENT

P.I.T. Trimmer line has a thin outer shell combined with a thick flexible core which absorbs the shock so you can keep cutting instead of wasting time winding spools Its thin, hard skin stands up to high temperatures and extreme cutting conditions;




| Model | Model | Overall Length (m) | Wire Diameter (mm) | Material |
|---|---|---|---|---|
| ATML01-P20M | Pentagonal | 15 | 2.0 | Nylon |
| ATML01-P24M | | 15 | 2.4 | Nylon |
| ATML01-P30M | | 15 | 3.0 | Nylon |
| ATML01-R13M | Round | 15 | 1.3 | Nylon |
| ATML01-R16M | | 15 | 1.6 | Nylon |
| ATML01-R20M | | 15 | 2.0 | Nylon |
| ATML01-R24M | | 15 | 2.4 | Nylon |
| ATML01-R30M | | 15 | 3.0 | Nylon |
| ATML01-S13M | Square | 15 | 1.3 | Nylon |
| ATML01-S16M | | 15 | 1.6 | Nylon |
| ATML01-S20M | | 15 | 2.0 | Nylon |
| ATML01-S24M | | 15 | 2.4 | Nylon |
| ATML01-S30M | | 15 | 3.0 | Nylon |
| ATML01-D13MS | Square Twist | 15 | 1.3 | Nylon |
| ATML01-D16MS | | 15 | 1.6 | Nylon |
| ATML01-D20MS | | 15 | 2.0 | Nylon |
| ATML01-D24MS | | 15 | 2.4 | Nylon |




| Model | Model | Overall Length (m) | Wire Diameter (mm) | Material |
|---|---|---|---|---|
| ATML01-P243 | Pentagonal | 338 | 2.4 | Nylon |
| ATML01-P303 | | 225 | 3.0 | Nylon |
| ATML01-P245 | | 570 | 2.4 | Nylon |
| ATML01-P305 | | 370 | 3.0 | Nylon |
| ATML01-R243 | Round | 260 | 2.4 | Nylon |
| ATML01-R303 | | 167 | 3.0 | Nylon |
| ATML01-R245 | | 430 | 2.4 | Nylon |
| ATML01-R305 | | 275 | 3.0 | Nylon |
| ATML01-S243 | Square | 233 | 2.4 | Nylon |
| ATML01-S303 | | 150 | 3.0 | Nylon |
| ATML01-S245 | | 395 | 2.4 | Nylon |
| ATML01-S305 | | 250 | 3.0 | Nylon |
| ATML01-D24L | Double Color Twist | 300 | 2.4 | Nylon |
| ATML01-D30L | | 225 | 3.0 | Nylon |
| ATML01-ST30L3 | Round | 102 | 3.0 | Nylon |
| ATML01-ST30L5 | | 169 | 3.0 | Nylon |




| Model | Model | Overall Length (m) | Wire Diameter (mm) | Material |
|---|---|---|---|---|
| ATML01-P30D | Pentagonal | 15 | 3.0 | Nylon |
| ATML01-P24D | | 15 | 2.4 | Nylon |
| ATML01-R24D | Round | 15 | 2.4 | Nylon |
| ATML01-R30D | | 15 | 3.0 | Nylon |
| ATML01-S24D | Square | 15 | 2.4 | Nylon |
| ATML01-S30D | | 15 | 3.0 | Nylon |
| ATML01-D24M | Double Color Square | 15 | 2.4 | Nylon |
| ATML01-D30M | | 15 | 3.0 | Nylon |
| ATML01-D20S | Double Color Twist | 15 | 2.0 | Nylon |
| ATML01-D24S | | 15 | 2.4 | Nylon |
| ATML01-D30S | | 15 | 3.0 | Nylon |
| ATML01-D30MS | Square Twist | 15 | 3.0 | Nylon |
| ATML01-D24D | | 15 | 2.4 | Nylon |
| ATML01-D30D | | 15 | 3.0 | Nylon |
| ATML01-ST30M | Round | 15 | 3.0 | Nylon |

## TRIMMMER HEAD

EFFICIENT

Trimmer Head is made of high quality ABS & PVC Materials, which ensures everlasting reliability and enduring value.This head compatible with every P.I.T. straight shaft trimmer.
No Modifications needed, You can complete the installation in a few minutes.Direct replacement, a simple plug & play with no wire splicing.



ATML02-TH01



ATML02-TH02



ATML02-TH03

| Model | Product Diameter (m) | Wire Diameter (mm) | Material |
|---|---|---|---|
| ATML02-TH01 | 115 | 2.4 | Nylon |
| ATML02-TH02 | 138.5 | 2.4 | Nylon |
| ATML02-TH03 | 122 | 2.4 | Nylon |



ATML02-TH04



ATML02-TH05



ATML02-TH06

| Model | Product Diameter (m) | Wire Diameter (mm) | Material |
|---|---|---|---|
| ATML02-TH04 | 80 | 3 | Aluminium |
| ATML02-TH05 | 59 | 3 | Aluminium |
| ATML02-TH06 | 115.5 | 2.4 | PP |





## ITALY-TYPE WELDING ELECTRODE HOLDER



| Model | Current | Overall Length (mm) | Load Rate | Diameter Electrode |
|---|---|---|---|---|
| P7000201 | 200A | 210 | 60% | 2.0-5.0 |

## DUTCH WELDING GROUND CLAMP



| Model | Current | Overall Length (mm) | Maximum Opening (mm) | Thinckness Of Body (mm) |
|---|---|---|---|---|
| P7000200 | 200A | 170 | 42 | 1.0 |

## WELDING CABLE PANEL CONNECTOR-PLUG



| Model | Current | Overall Length (mm) | Load Rate |
|---|---|---|---|
| AWDA01-1025 | 10-25 | 85 | 75 |

## VACUUM CLEANER FILTER





| Model | Height (mm) | Inner diameter (mm) | Out diameter (mm) |
|---|---|---|---|
| AVCP01-0201 | 120mm | 80mm | 120mm |
| AVCP01-0302 | 125mm | 125mm | 160mm |

## VACUUM CLEANER CLOTH DUST BAG





| Model | Capacity | length (mm) | Width (mm) | thickness (mm) |
|---|---|---|---|---|
| AVCP02-0015 | 15L | 375 | 230 | 4.8 |
| AVCP02-0020 | 20L | 400 | 280 | 4.8 |

## VACUUM CLEANER DUST COLLECTION BAG





| Model | Capacity | length (mm) | Width (mm) | thickness (mm) |
|---|---|---|---|---|
| AVCP02-0015A | 15L | 405 | 270 | 2.8 |
| AVCP02-0020A | 20L | 478 | 310 | 2.8 |

P.I.T.

HAND TOOLS




# HAND TOOLS

## BUILT FOR EVERYDAY PERFORMANCE

**Reliable. Durable. Ready for Every Task.**

**DRUAPOWER** tools can provide high-precision solutions and maintain prolonged continuous operation with high accuracy and long working life.The user are mostly professional factories or engineering construction teams.

ULTIMATE QUALITY

**ADVANCEPOWER** products are suited to rugged conditions, the working condition focuses on stability. Mainly used in construction, plumbing, building roads, decoration, woodworking, metalworking and other industries that demand heavy-duty performance.

PLATINUM QUALITY

**CONTROL POWER** High cost-performance ratio, good portability and versatility.They are mainly used in scenarios where high precision and prolonged operation time are not required. Suitable for occasional repair jobs and simple DIY tasks.

PREMIUM QUALITY




## COMBINATION PLIERS

ADVANCEPOWER ★★★★








| Model | Size (in) | Size (mm) | Craftsmanship | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLR01-0160 | 6" | 150mm | Forging | 55#CS | 1 |
| HPLR01-0180 | 7" | 180mm | Forging | 55#CS | 1 |
| HPLR01-0200 | 8" | 200mm | Forging | 55#CS | 1 |

## DIAGONAL CUTTING PLIERS

ADVANCEPOWER ★★★★








| Model | Size (in) | Size (mm) | Craftsmanship | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLR02-0160 | 6" | 150mm | Forging | 55#CS | 1 |
| HPLR02-0180 | 7" | 180mm | Forging | 55#CS | 1 |

## LONG NOSE PLIERS

ADVANCEPOWER ★★★★








| Model | Size (in) | Size (mm) | Craftsmanship | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLR03-0160 | 6" | 150mm | Forging | 55# steel | 1 |
| HPLR03-0200 | 8" | 200mm | Forging | 55# steel | 1 |

## COMBINATION PLIERS

ADVANCEPOWER ★★★★ *ECCENTRIC STRUCTURE*




| Model | Size (in) | Size (mm) | Structural Design | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLP01-0150 | 6" | 150mm | Eccentric Structure | 55#CS | 1 |
| HPLP01-0180 | 7" | 180mm | Eccentric Structure | 55#CS | 1 |
| HPLP01-0200B | 8" | 200mm | Eccentric Structure | 55#CS | 1 |

## DIAGONAL CUTTING PLIERS

ADVANCEPOWER ★★★★ *ECCENTRIC STRUCTURE*




| Model | Size (in) | Size (mm) | Structural Design | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLP02-0150B | 6" | 150mm | Eccentric Structure | 55#CS | 1 |
| HPLP02-0180 | 7" | 180mm | Eccentric Structure | 55#CS | 1 |

## LONG NOSE PLIERS

ADVANCEPOWER ★★★★ *ECCENTRIC STRUCTURE*




| Model | Size (in) | Size (mm) | Structural Design | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLP03-0150B | 6" | 150mm | Eccentric Structure | 55#CS | 1 |
| HPLP03-0200B | 8" | 200mm | Eccentric Structure | 55#CS | 1 |

## 6 IN 1 MULTI COMBINATION PLIERS




| Model | Size (in) | Size (mm) | Structural Design |
|---|---|---|---|
| HPLP01-0225A | 9" | 225mm | Eccentric Structure |

## LONG NOSE PLIERS

DRUAPOWER ECCENTRIC STRUCTURE NICKEL-PLATED PLIERS




| Model | Size (in) | Size (mm) | Structural Design | Pack Quantity |
|---|---|---|---|---|
| HPLP03-0150A | 6" | 150mm | Eccentric Structure | 1 |
| HPLP03-0200A | 8" | 200mm | Eccentric Structure | 1 |

## 4 PIECE SNAP RING PLIERS SET

ADVANCEPOWER





| Model | Size (in) | Size (mm) | Surface Treatment | Pack Quantity |
|---|---|---|---|---|
| HSET01-0004 | 6" | 150mm | Ferronickel treatment | 1 |

## LONG NOSE PLIERS

DRUAPOWER QUALITY MATERIAL








| Model | Size (in) | Size (mm) | Eccentric Structure | Pack Quantity |
|---|---|---|---|---|
| HPLP03-0150 | 6" | 150mm | Eccentric Structure | 1 |
| HPLP03-0200 | 8" | 200mm | Eccentric Structure | 1 |

## 3 PCS PLIER SET

DRUAPOWER QUALITY MATERIAL








| Model | Size (in) | Size (mm) | Eccentric Structure | Pack Quantity |
|---|---|---|---|---|
| HPLS01-0003 | 6" 8" 6" | 160mm 200mm 150mm | Eccentric Structure | 1 |

## MINI PLIERS

ADVANCEPOWER





| Model | Size (in) | Size (mm) | Surface Treatment | Pack Quantity |
|---|---|---|---|---|
| HPLR06-0115B | 4.5" | 115mm | Ferronickel treatment | 1 |
| HPLR06-0115C | 4.5" | 115mm | Ferronickel treatment | 1 |
| HPLR06-0115D | 4.5" | 115mm | Ferronickel treatment | 1 |

| Model | Size (in) | Size (mm) | Surface Treatment | Pack Quantity |
|---|---|---|---|---|
| HPLR06-0115E | 4.5" | 115mm | Ferronickel treatment | 1 |
| HPLR06-0115F | 4.5" | 115mm | Ferronickel treatment | 1 |
| HPLR06-0115L | 4.5" | 115mm | Ferronickel treatment | 1 |

## COMBINATION PLIERS

DRUAPOWER ECCENTRIC STRUCTURE NICKEL-PLATED PLIERS




| Model | Size (in) | Size (mm) | Structural Design | Pack Quantity |
|---|---|---|---|---|
| HPLP01-0200A | 8" | 200mm | Eccentric Structure | 1 |

## DIAGONAL CUTTING PLIERS

DRUAPOWER ECCENTRIC STRUCTURE NICKEL-PLATED PLIERS




| Model | Size (in) | Size (mm) | Structural Design | Pack Quantity |
|---|---|---|---|---|
| HPLP02-0150A | 6" | 150mm | Eccentric Structure | 1 |

## SWEDISH PIPE WRENCH, 90 DEGREE ANGLED

ADVANCEPOWER








| Model | Size (in) | Max Opening (mm) | Finish | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPWS01-0100 | 1" | 40 | Powder coated | 45# steel | 1 |
| HPWS01-0150 | 1.5" | 55 | Powder coated | 45# steel | 1 |

## SWEDISH PIPE WRENCH, 45 DEGREE ANGLED

ADVANCEPOWER








| Model | Size (in) | Max Opening (mm) | Finish | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPWS02-0100 | 1" | 40 | Powder coated | 45# steel | 1 |
| HPWS02-0150 | 1.5" | 55 | Powder coated | 45# steel | 1 |

## FAST ADJUSTABLE WATER PUMP PLIERS








| Model | Size (in) | Size (mm) | Surface Treatment | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLR05-0180 | 7" | 180mm | polished pliers head | 45# steel | 1 |
| HPLR05-0250 | 10" | 250mm | polished pliers head | 45# steel | 1 |
| HPLR05-0300 | 12" | 300mm | polished pliers head | 45# steel | 1 |

## PUSH BUTTON ADJUSTABLE WATER PUMP PLIERS





| Model | Size (in) | Size (mm) | Surface Treatment | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLP09-0125 | 5" | 125mm | Forging | CRV | 1 |
| HPLP09-0175 | 7" | 175mm | Forging | CRV | 1 |
| HPLP09-0250 | 10" | 250mm | Forging | CRV | 1 |

## PIPE WRENCH




| Model | Size (in) | HeadMaterial | Twist Material | Clamp body | Pack Quantity |
|---|---|---|---|---|---|
| HPWS03-0200 | 8" | 50CRV | 35K | Iron | 1 |
| HPWS03-0250 | 10" | 50CRV | 35K | Iron | 1 |
| HPWS03-0300 | 12" | 50CRV | 35K | Iron | 1 |
| HPWS03-0350 | 14" | 50CRV | 35K | Iron | 1 |

| Model | Size (in) | HeadMaterial | Twist Material | Clamp body | Pack Quantity |
|---|---|---|---|---|---|
| HPWS03-0450 | 18" | 50CRV | 35K | Iron | 1 |
| HPWS03-0600 | 24" | 50CRV | 35K | Iron | 1 |
| HPWS03-0900 | 36" | 50CRV | 35K | Iron | 1 |
| HPWS03-1200 | 48" | 50CRV | 35K | Iron | 1 |

## TWIN GRIP PLIERS







| Model | Size (in) | Size (mm) | Craftsmanship | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLP07-0200 | 8" | 200mm | Forging | 45#CS | 1 |

## PLIERS WRENCH





| Model | Size (in) | Size (mm) | Material | Handle Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLP06-0175 | 7" | 175mm | CRV | PVC | 1 |
| HPLP06-0250 | 10" | 250mm | CRV | PVC | 1 |
| HPLP06-0300 | 12" | 300mm | CRV | PVC | 1 |

## END CUTTING PLIERS







| Model | Size (in) | Size (mm) | Material | Pack Quantity |
|---|---|---|---|---|
| HPLR09-0180 | 7" | 180mm | 55#CS | 1 |

## EAR CLAMP PLIERS







| Model | Size (in) | Size (mm) | Material | Pack Quantity |
|---|---|---|---|---|
| HPLR10-0250 | 10" | 250mm | 55#CS | 1 |

## PLIERS WRENCH SLEEVE



| Model | Size (in) | Size (mm) | Material | Pack Quantity |
|---|---|---|---|---|
| HSET03-0307 | 7" | 175mm | TPU | 3set |
| HSET03-0310 | 10" | 250mm | TPU | 3set |
| HSET03-0312 | 12" | 300mm | TPU | 3set |



## CARPENTERS' END CUTTING PLIERS







| Model | Size (in) | Size (mm) | Material | Pack Quantity |
|---|---|---|---|---|
| HPLR11-0250 | 10" | 250mm | 55#CS | 1 |

## LOCKING GRIP PLIERS (CURVED JAWS)





| Model | Size (in) | Size (mm) | Surface Treatment | Material | Pack Quantity |
|---|---|---|---|---|---|
| HPLP10-0180 | 7" | 180mm | Chrome Plating | CRV | 1 |
| HPLP10-0250 | 10" | 250mm | Chrome Plating | CRV | 1 |

## CABLE CUTTER

ADVANCEPOWER




| Model | Size (in) | Size(mm) | Max cutting size (mm) | Material | Pack Quantity |
|---|---|---|---|---|---|
| HCAC01-0160 | 6" | 160mm | 6mm | 55# steel | 1 |
| HCAC01-0200 | 8" | 200mm | 7mm | 55# steel | 1 |

## MINI BOLT CUTTER

DRUAPOWER



| Model | Size (in) | Size (mm) | Material | Pack Quantity |
|---|---|---|---|---|
| HBOC02-0200 | 8" | 200mm | 60CRV | 1 |

## MINI BOLT CUTTER

DRUAPOWER



| Model | Size (in) | Size (mm) | Material | Pack Quantity |
|---|---|---|---|---|
| HBOC02-0250 | 10" | 250mm | 60CRV | 1 |

## BOLT CUTTER

ADVANCEPOWER







| Model | Size (in) | Size(mm) | Surface treatment | Pack Quantity |
|---|---|---|---|---|
| HBOC01-0350 | 14" | 350mm | pliers head polished | 1 |
| HBOC01-0450 | 18" | 450mm | pliers head polished | 1 |
| HBOC01-0600 | 24" | 600mm | pliers head polished | 1 |

## COMPOUND ACTION AVIATION SNIPS

DRUAPOWER 3X DURABILITY




| Model | Size (in) | Size(mm) | Material | Pack Quantity |
|---|---|---|---|---|
| HAVS01-0250 | 10" | 250mm | CRV | 1 |
| HAVS02-0250 | 10" | 250mm | CRV | 1 |
| HAVS03-0250 | 10" | 250mm | CRV | 1 |

## COMPOUND ACTION AVIATION SNIPS

DRUAPOWER




| Model | Size (in) | Size(mm) | Material | Pack Quantity |
|---|---|---|---|---|
| HAVS01-0190 | 7.5" | 190mm | CR-MO | 1 |
| HAVS02-0190 | 7.5" | 190mm | CR-MO | 1 |
| HAVS03-0190 | 7.5" | 190mm | CR-MO | 1 |






## VDE COMBINATION PLIERS

DRUAPOWER 1000V VDE GS




| Model | Size (in) | Size (mm) | Structural Design | Pack Quantity |
|---|---|---|---|---|
| HPLV01-0160 | 6" | 160mm | Eccentric Structure | 1 |
| HPLV01-0180 | 7" | 180mm | Eccentric Structure | 1 |
| HPLV01-0200 | 8" | 200mm | Eccentric Structure | 1 |

## VDE LONG NOSE PLIERS

DRUAPOWER 1000V VDE GS




| Model | Size (in) | Size (mm) | Structural Design | Pack Quantity |
|---|---|---|---|---|
| HPLV02-0160 | 6" | 160mm | Eccentric Structure | 1 |

## VDE DIAGONAL CUTTER PLIERS

DRUAPOWER 1000V VDE GS




| Model | Size (in) | Size (mm) | Structural Design | Pack Quantity |
|---|---|---|---|---|
| HPLV03-0160 | 6" | 160mm | Eccentric Structure | 1 |

## VDE HEAVY-DUTY DIAGONAL CUTTER PLIERS

DRUAPOWER 1000V VDE GS




| Model | Size (in) | Size (mm) | Structural Design | Pack Quantity |
|---|---|---|---|---|
| HPLV04-0180 | 7" | 180mm | Eccentric Structure | 1 |

## 6-IN-1 MULTI-FUNCTIONAL WIRE STRIPPER

DRUAPOWER




| Model | Size (in) | Size (mm) | Structural Design | Pack Quantity |
|---|---|---|---|---|
| HMTP02-0200 | 8" | 200mm | Eccentric Structure | 1 |

## MULTIFUNCTIONAL WIRE STRIPPERS AND CUTTERS

ADVANCEPOWER




| Model | Size (in) | Size (mm) | Wire size | Material | Type |
|---|---|---|---|---|---|
| HPLR07-0150 | 6" | 150mm | 10-22 AWG | 50# steel | German |




## VOLTAGE TESTER







| Model | Range | Size (mm) | Handle material | Material | Surface |
|---|---|---|---|---|---|
| HVGT01-0190 | AC 100~500v | 4x190mm | ABS+PC | 40Cr | plating |

## INDUCTIVE VOLTAGE TESTER

ON-OFF TEST

IC CHIP








| Model | Range | Size (mm) | Handle material | Material | Surface |
|---|---|---|---|---|---|
| HVGT04-0138 | DC12~24v AC24~250v | 3.5x138mm | AS | CR-V | plating |

## PVC INSULATING TAPE






| Model | width | total length | Structural Design | Pack Quantity |
|---|---|---|---|---|
| HLTC01-5018 | 50mm | 10m | PVC | 4 |
| HLTC01-1918 | 19mm | 20m | PVC | 10 |


## FLANNEL INSULATING TAPE






| Model | width | total length | Structural Design | Pack Quantity |
|---|---|---|---|---|
| HLTC02-1945 | 19mm | 15m | Cotton fabric | 10 |

## MULTIFUNCTIONAL CRIMPING PLIERS

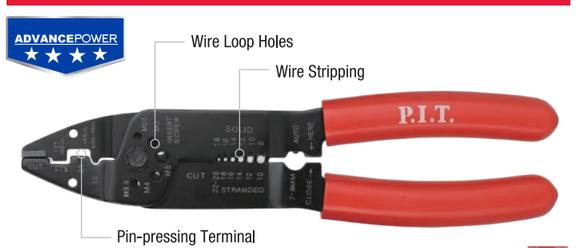






| Model | Size (in) | Size (mm) | Wire size | Material | Type |
|---|---|---|---|---|---|
| HPLR07-0230 | 9" | 230mm | 10-22 AWG | 50# steel | German |

## AUTO WIRE STRIPPING PLIERS








| Model | Size (in) | Size (mm) | Wire size | Material | Type |
|---|---|---|---|---|---|
| HPLR08-0205 | 8" | 205mm | 10-22 AWG | Cr12MoV | German |

## DIGITAL MULTIMETER

AC DC · RESISTANCE · DIODE · FLASHLIGHT






| Model | Specification | Knobs Material |
|---|---|---|
| HMUR01-0001 | Voltage DC:600V Voltage AC:600V Current DC:10A Current AC:10A Resistance: 20MΩ | ABS |

## DIGITAL MULTIMETER

AC DC · RESISTANCE · DIODE · FLASHLIGHT






| Model | Specification | Knobs Material |
|---|---|---|
| HMUR02-0001 | Voltage DC:600V Voltage AC:600V Current AC:10A Resistance: 20MΩ | ABS |




## 2 IN 1 SCREWDRIVER

ADVANCEPOWER ★★★★

2 IN 1

EXACT FITMENT

MAGNETIC









| Model | Type | Size (in) | Overall Length (mm) | Blade Diameter (mm) | Blade Length (mm) | Torque (N·m) | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|---|---|
| HSDR04-2IN1 | SL+PH2 | 9" | 200mm | 6.29-6.35 | 107 | / | 1 | Plastic Hangtag |

## 21 PIECE SCREWDRIVER SET

CONTROLPOWER ★★★









| Model | | HSDR05-021A |
|---|---|---|
| Size | | 4pc Star Screwdriver Bit, T5 T8 T10 T15; |
| | | 3pc Slotted Screwdriver, 3x75, 5x75, 6x100mm ; |
| | | 3pc Phillips Screwdriver PH0x75mm, PH1x75; |
| | | 1pc Screwdriver Adaptor, 10x75mm; |
| | | Ph2x100mm, 1pc Screwdriver Adaptor; |
| | | 4pc 25mm Screwdriver Bit, PH0,PH1,PH2,PH3; |
| | | 4pc 25mm Screwdriver Bit, PZ0,PZ1,PZ2,PZ3; |
| | | 2pc Hex Screwdriver S1,S2; |
| Material | | CRV |
| Packaging | | Double Blister |

## SLOTTED SCREWDRIVER




| Model | Specification | Material | Handle Material | Surface Treatment | Handle Craftsmanship | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|---|
| HSDS01-3075 | SL3x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-3100 | SL3x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-3150 | SL3x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-5075 | SL5x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-5100 | SL5x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-5125 | SL5x125mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-5150 | SL5x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-6075 | SL6x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-6100 | SL6x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-6125 | SL6x125mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-6150 | SL6x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-8150 | SL8x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-8200 | SL8x200mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-8250 | SL8x250mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-0538 | SL5x38mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-0638 | SL6x38mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDS01-4100 | SL4x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |

## PHILLIPS SCREWDRIVER




| Model | Specification | Material | Handle Material | Surface Treatment | Handle Craftsmanship | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|---|
| HSDH01-3075 | PH0x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-3100 | PH0x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-3150 | PH0x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-5075 | PH1x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-5100 | PH1x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-5125 | PH1x125mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-5150 | PH1x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-6075 | PH2x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-6100 | PH2x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-6125 | PH2x125mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-6150 | PH2x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-8150 | PH3x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-8200 | PH3x200mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-8250 | PH3x250mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-0538 | PH1x38mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDH01-0638 | PH2x38mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |

## POZI SCREWDRIVER




| Model | Specification | Material | Handle Material | Surface Treatment | Handle Craftsmanship | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|---|
| HSDZ01-3075 | PZ0x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-3100 | PZ0x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-3150 | PZ0x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-5075 | PZ1x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-5100 | PZ1x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-5125 | PZ1x125mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-5150 | PZ1x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-6075 | PZ2x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-6100 | PZ2x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-6125 | PZ2x125mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-6150 | PZ2x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-8150 | PZ3x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-8200 | PZ3x200mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-8250 | PZ3x250mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-0538 | PZ1x38mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDZ01-0638 | PZ2x38mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |

## TORX SCREWDRIVER




| Model | Specification | Material | Handle Material | Surface Treatment | Handle Craftsmanship | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|---|
| HSDT02-3075 | T7x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-3100 | T8x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-3150 | T9x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-5075 | T10x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-5100 | T15x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-5125 | T20x125mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-5150 | T20x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-6075 | T25x75mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-6100 | T27x100mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-6125 | T30x125mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-6150 | T30x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-8150 | T40x150mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-8200 | T40x200mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-8250 | T40x250mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-0538 | T15x38mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |
| HSDT02-0638 | T25x38mm | 6150CRV | PP+TPR | Chrome Plated Tool Bar | Injection Molding | 1 | Plastic Hangtag |




## 6 PCS SCREWDRIVER SET




| Model | HSDR05-0006 |
|---|---|
| | PH2x125mm PH1x100mm PH0x75mm |
| | SL3x75mm SL6x125mm SL5x100mm ; |
| Material | CRV |

## 2 PCS SCREWDRIVER SET




| Model | HSDR05-0002A |
|---|---|
| | PH2x100mm |
| | SL6x100mm |
| Material | CRV |

## 2 PCS SCREWDRIVER SET




| Model | HSDR05-0002B |
|---|---|
| | PH1x100mm |
| | SL5x100mm |
| Material | 6150CRV |

## 8 PCS SCREWDRIVER SET




| Model | HSDR05-0008 |
|---|---|
| | PH0x75mm PH1x100mm PH2x150mm; |
| | SL3x75mm SL5x100mm SL6x150mm; |
| | PZ2x150mm PZ1x100mm |
| Material | CRV |

## 10 PCS SCREWDRIVER SET




| Model | HSDR05-0010 |
|---|---|
| | PH0x60mm PH1x80mm PH2x100mm PH3x150mm; |
| | SL3x75mm SL4x100mm SL5.5x125mm SL6x38mm SL6.5x150mm SL8x200mm; |
| Material | CRV |

## 8 PCS FOLDING HEX KEY SET



| | |
|---|---|
| Model | HHEW01-H008 |
| | 1.5,2.0,2.5,3.0,4.0,5.0,6.0,8.0mm |
| Material | CRV |
| Packaging | Plastic Hangtag |

## 8 PCS FOLDING BALL POINT HEX KEY SET




| | |
|---|---|
| Model | HHEW01-P008 |
| | 1.5,2.0,2.5,3.0,4.0,5.0,6.0,8.0mm |
| Material | CRV |
| Packaging | Plastic Hangtag |

## 9PCS SHORT ARM BALL POINT HEX KEY SET



| | |
|---|---|
| Model | HHEW02-PS09 |
| | 1.5,2,2.5,3,4,5,6,8,10mm; 1.5,2,2.5,3,4,5,6,8,10mm; |
| Material | CRV |
| Packaging | Sandwich |

## 9 PCS SHORT ARM TORX KEY SET

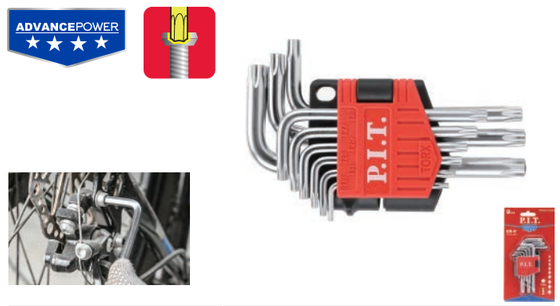

| | |
|---|---|
| Model | HHEW02-TS09 |
| | T9, T10, T15, T20, T25, T27, T30, T40,T50 |
| Material | CRV |
| Packaging | Sandwich |

## 8 PCS FOLDING TORX HEX KEY SET




| | |
|---|---|
| Model | HHEW01-T008 |
| | T9,T10,T15,T20,T25,T27,T30,T40mm |
| Material | CRV |
| Packaging | Plastic Hangtag |

## 9-PIECE LONG-ARM BALL-POINT HEX KEY SET



| | |
|---|---|
| Model | HHEW04-PM09 |
| | 1.5,2,2.5,3,4,5,6,8,10mm; 1.5,2,2.5,3,4,5,6,8,10mm; |
| Material | CRV |
| Packaging | Sandwich |

## 9 PCS LONG ARM HEX KEY SET

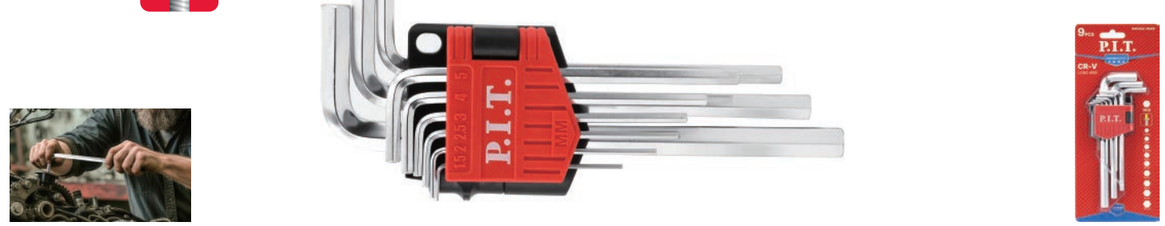


| | |
|---|---|
| Model | HHEW02-HM09 |
| | 1.5,2,2.5,3,4,5,6,8,10mm |
| Material | CRV |
| Packaging | Sandwich |

## 9-PIECE COLOR-CODED LONG ARM TORX KEY SET




| | |
|---|---|
| Model | HHEW04-TM09 |
| | T9, T10, T15, T20, T25, T27, T30, T40, T50 |
| Material | CRV |
| Packaging | Plastic Hangtag |

## 9PCS SHORT ARM HEX KEY SET

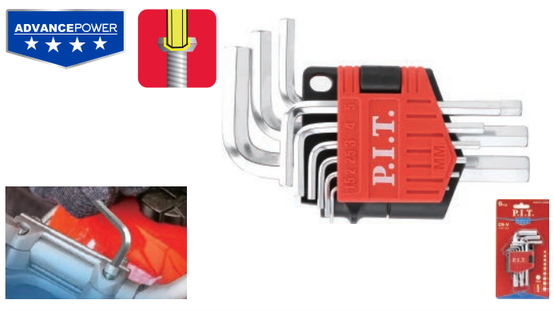


| | |
|---|---|
| Model | HHEW02-HS09 |
| | 1.5,2,2.5,3,4,5,6,8,10mm |
| Material | CRV |
| Packaging | Sandwich |

## 9 PCS LONG ARM TORX KEY SET

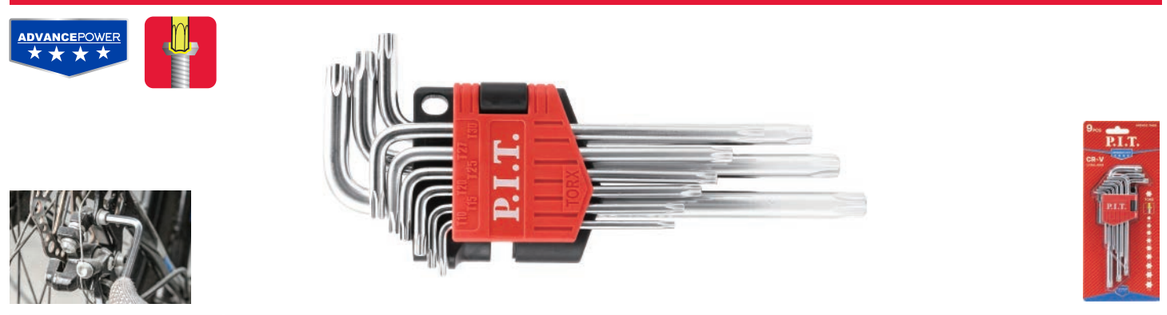

| | |
|---|---|
| Model | HHEW02-TM09 |
| | T9, T10, T15, T20, T25, T27, T30, T40, T50 |
| Material | CRV |
| Packaging | Sandwich |

## 9 PCS EXTRA LONG ARM HEX KEY SET







| Model | HHEW02-HL09 |
|---|---|
| | 1.5,2,2.5,3,4,5,6,8,10mm |
| Material | CRV |
| Packaging | Sandwich |

## 9 PCS EXTRA LONG ARM BALL POINT HEX KEY SET







| Model | HHEW02-PL09 |
|---|---|
| | 1.5,2,2.5,3,4,5,6,8,10mm; 1.5,2,2.5,3,4,5,6,8,10mm; |
| Material | CRV |
| Packaging | Sandwich |

## 9 PCS EXTRA LONG ARM TORX KEY SET









| Model | HHEW02-TL09 |
|---|---|
| | T10,T15,T20,T25,T27,T30,T40,T45,T50mm |
| Material | CRV |
| Packaging | Sandwich |

## 8 PCS FLAT HEAD T-HANDLE ALLEN WRENCHES











| Model | HHEW03-H008 |
|---|---|
| | 2.0/2.5x75mm,3.0/4.0x100mm,5.0/6.0x150mm,8.0/10.0x200mm; |
| Material | CRV |
| Packaging | Sandwich |

## 8 PCS BALL TIP T-SHANK ALLEN WRENCHES












| Model | HHEW03-P008 |
|---|---|
| | 2.0/2.5x75mm,3.0/4.0x100mm,5.0/6.0x150mm,8.0/10.0x200mm; |
| Material | CRV |
| Packaging | Sandwich |

## 8 PCS STAR T-SHANK ALLEN WRENCHES





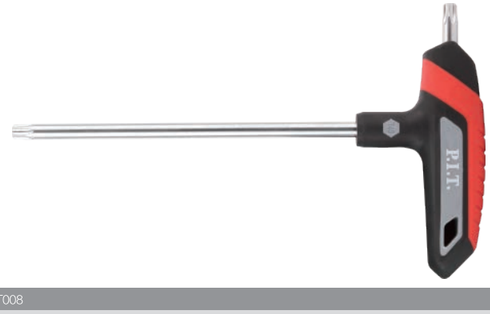





| Model | HHEW03-T008 |
|---|---|
| | T10/T15x75mm ,T20/T25x100mm,T30/T40x150mm,T45/T50x200mm; |
| Material | CRV |
| Packaging | Sandwich |




## 12-IN-1 RATCHET SCREWDRIVER SET




| Model | HSDR04-0012A |
|---|---|
| | 1-Ratchet Screwdriver 12pc-bits(25mm) CR-V6150 |
| | SLOTTED:4MM,5MM,6MM Phillips:PH1,PH2,PH3 TORX:T10,T15,T20; Hex:H3,H4,H5 |
| Material | Ratchet head: Carbon steel 08LA, matte chrome finish; Bit: 6150CRV |

## 12-IN-1 RATCHET SCREWDRIVER SET




| Model | HSDR04-0012B |
|---|---|
| | 1pc 5x Speed Ratchet Screwdriver; |
| | 12pcs Bits(6.35x25mm):Slotted3mm,4mm,5mm,6mm,PH0,PH1,PH2,PH3,T10,T15,T20,T25 |
| Material | Ratchet head: Carbon steel 08LA, matte chrome finish; Bit: 6150CRV |

## 48 PCS RATCHET SCREWDRIVER SET









| Model | HSDR04-0048 |
|---|---|
| | 1PC RATCHET T Handle Bits Driver ; 1PC Precision Ratchet Screwdriver ; 1pc Magnetic Holder ; 1pc ADP(25mm) |
| | 12pcs Bits(6.35x25mm):Slotted 3mm,4mm,5mm,6mm,PH0,PH1,PH2,PH3,T10,T15,T20,T25 |
| | 20pcs Precision Bits(4x28mm):Slotted 2.5mm,2.5mm,3mm,3.5mm,4mm,PH000,PH000,PH00,PH0,PH1,T5,T6,T7,T8,T9,H1.3,H2,H2.5,H3,H3.5 |
| | 6pcs Metric Socket:5mm,6mm,7mm,8mm,9mm,10mm; 6pcs SAE Socket:1/4",5/16",11/32",3/8",7/16",1/2" |
| Material | Ratchet head: 08LA carbon steel, matte chrome finish; Bit: 6150CRV, natural sandblasted; Sleeve: 45# steel |

## 29 PCS T-SCREWDRIVERS









| Model | HSDR04-0029T |
|---|---|
| | 1pc T Handle Bits Driver; 1pc Ratchet Screwdriver; 1pc Magnetic Holder; 1pc Adapter(25mm); |
| | 16pcs Bits(6.35mmx25mm):Slotted 3mm,4mm,5mm,6mm,PH0,PH1,PH2,PH3,PZ0,PZ1,PZ2,PZ3,T10,T15,T20,T25; |
| | 9pcs 1/4" Socket:4mm,5mm,6mm,7mm,8mm,9mm,10mm,11mm,12mm; |
| Material | Ratchet head: 08LA carbon steel, matte chrome finish; Bit: 6150CRV, natural sandblasted; Sleeve: 45# steel |

## 29 PCS RATCHET SCREWDRIVER SET








| Model | HSDR04-0029 |
|---|---|
| | 1pc 25mm 1/4 in. CR-V sanding finish adapter; |
| | 27pcs 25mm 1/4 in. CR-V sanding finish bits: 4pcs slotted: 3, 4, 5, 6mm 5pcs torx: T10, T15, T20, T25, T30 |
| | 4pcs torx with hole(tamper proof): T10, T15, T20, T25 4pcs pozi: PZ0, PZ1, PZ2, PZ3 |
| | 4pcs Phillips: PH0, PH1, PH2, PH3 6pcs hexagon: 2, 2.5, 3, 4, 5, 6mm |
| Material | Ratchet head: Carbon steel 08LA, matte chrome finish; Bit: 6150CRV |

## 34 PCS RATCHET SCREWDRIVER SET







| | |
|---|---|
| Model | HSDR04-0034 |
| | 1pc Ratchet Screwdriver ; 1pc ADP(25MM) ; 9pcs 1/4" Socket:4mm,5mm,6mm,7mm,8mm,9mm,10mm,11mm,12mm |
| | 23pcs Bits(6.35x25mm):Slotted 3mm,4mm,5mm,6mm,PH0,PH1,PH2,PH3,PZ0,PZ1,PZ2,PZ3,T10,T15,T20,T25,T27,T30,H2,H3,H4,H5,H6; |
| Material | Ratchet head: 08LA carbon steel, matte chrome plating; Bit: 6150CRV, natural sandblasting; Sleeve: 45# steel, plating |

## 46 PCS RATCHET SCREWDRIVER SET







| | |
|---|---|
| Model | HSDR04-0046 |
| | 1pc ratchet screwdriver; 1pc adapter: 25mm; 1pc bits driver: 60mm; |
| | 29pcs CRV bits (6.35x25mm): SL:3, 4, 4,5,5, 6, 7mm; PH0,1, 2, 3; PZ0, 1, 2, 3; T10, 15, 20, 25, 27,30; H3, 4, 5, 6; S0,1, 2, 3; |
| | 7pcs metric sockets 1/4" : 5, 6, 7, 8, 9, 10, 11mm; 7pcs SAE sockets 1/4" : 3/16", 1/4" , 9/32", 5/16", 11/32" , 3/8" , 7/1 |
| Material | Ratchet head: 08LA carbon steel, matte chrome finish; Bit: 6150CRV, natural sandblasted; Sleeve: 45# steel |

## 50 PCS PRECISION SCREWDRIVER SET








| | |
|---|---|
| Model | HSDR04-0050 |
| | 1pc Precision Bits Driver ;1pc 100mm Precision Driver; |
| | 48pcs Bits(4x28mm):1.5mm,1.5mm,2.0mm,2.0mm,2.5mm,2.5mm,3.0mm, 3.0mm, 3.5mm,3.5mm,3.5mm, |
| | PH000,PH000,PH00,PH00,PH0,PH0,PH0,PH0, PH1, PH1,PH1,PH1,PZ0,PZ0,PZ1,PZ1,PZ1,PZ1, |
| | T5,T6,T7,T8,T8,T9,T9,T10, T10, T15,T15,T20,T20,H0.9,H1.3,H2,H2.5,H3,H4 |
| Material | Ratchet head: Carbon steel 08LA, matte chrome finish; Bit: 6150CRV |

## 68 PCS RATCHET SCREWDRIVER SET







| | |
|---|---|
| Model | HSDR04-0068 |
| | 1pc Box;1pc Ratchet Screwdriver;1pc Precision Bits Driver;1pc Bits Driver(60mm); 1pc ADP; 9pcs 1/4" Socket:4mm,5mm,6mm,7mm,8mm,9mm,10mm,11mm,12mm |
| | 30pcs Bits(6.35x25mm):Slotted3mm,4mm,5mm,5mm,6mm,PH0,PH1,PH2,PH2,PH3,PZ0,PZ1,PZ2,PZ3,T10,T15,T20,T20,T25,T25,T27,T30,H3,H4,H5,H6,S0,S1,S2,S3; |
| | 24pcs Precision Bits(4x28mm):Slotted 1.0mm,1.5mm,2.0mm,2.5mm,3.0mm,3.5mm,4mm,PH000,PH000,PH00,PH0,PH1,PZ0,PZ1,T4,T5,T6,T7,T8,H0.7,H0.9,H1.3,H1.5,H2.0 |
| Material | Ratchet head: Carbon steel 08LA, matte chrome finish; Bit: 6150CRV |

## 6-IN-1 RATCHET SCREWDRIVER SET







| | |
|---|---|
| Model | HSDR04-0006 |
| | 1PC RATCHET SCEWDRIVER; |
| | 6PCS BITS(6.35X25MM):Slotted 4mm,6mm,PH1,PH2,PZ1,PZ2; |
| Material | Ratchet head: Carbon steel 08LA, matte chrome finish; Bit: 6150CRV |


## 7 PCS RATCHET SCREWDRIVER SET







| | |
|---|---|
| Model | HSDR04-0007 |
| | 1pc Ratchet Screwdriver; |
| | 6pcs Bits(6.35x25mm):Slotted 4mm,5mm,6mm,PH1,PH2,PH3 |
| Material | Ratchet head: Carbon steel 08LA, matte chrome finish; Bit: 6150CRV |

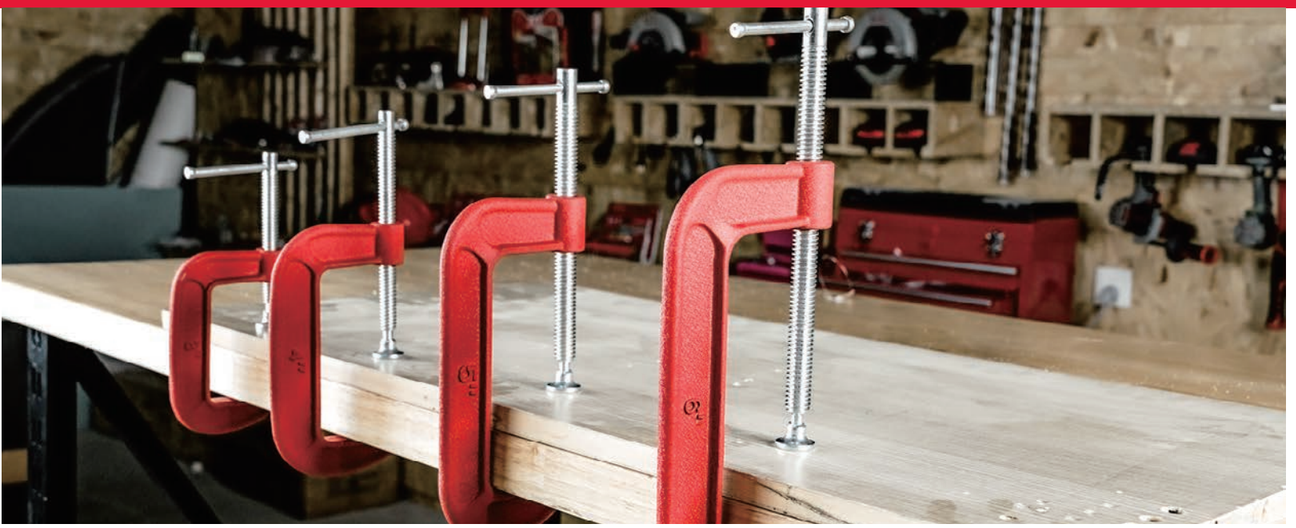

## QUICK GRIP BAR CLAMP

ADVANCEPOWER





| Model | Size (mm) | Size (in) | Maximum Clamping Force | Throat Depth | Packaging |
|---|---|---|---|---|---|
| HCLQ01-0150 | 150mm | 6" | 588N | 60mm | Hangtag |
| HCLQ01-0300 | 300mm | 12" | 588N | 60mm | Hangtag |
| HCLQ01-0450 | 450mm | 18" | 588N | 60mm | Hangtag |

## HEAVY DUTY QUICK CLAMP

DRUAPOWER



| Model | Size (mm) | Size (in) | Maximum Clamping Force | Throat Depth | Packaging |
|---|---|---|---|---|---|
| HCLQ02-0150 | 150mm | 6" | 75KG | 65mm | Hangtag |
| HCLQ02-0300 | 300mm | 12" | 75KG | 65mm | Hangtag |
| HCLQ02-0450 | 450mm | 18" | 75KG | 65mm | Hangtag |
| HCLQ02-0600 | 600mm | 24" | 75KG | 65mm | Hangtag |

## G CLAMP

CONTROLPOWER





| Model | Size (mm) | Size (in) | Maximum Clamping Force | Weight | Pack Quantity |
|---|---|---|---|---|---|
| HCLG01-0050 | 50 | 2" | 2500N | 200g | 1 |
| HCLG01-0075 | 75 | 3" | 4000N | 400g | 1 |
| HCLG01-0100 | 100 | 4" | 5000N | 570g | 1 |
| HCLG01-0125 | 125 | 5" | 6000N | 820g | 1 |
| HCLG01-0150 | 150 | 6" | 6000N | 1000g | 1 |

## PLASTIC QUICK C-CLAMP

ADVANCEPOWER





| Model | Size (mm) | Size (in) | Maximum Clamping Force | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HCLG02-0050 | 50mm | 2" | 25KG | 1 | Hangtag |
| HCLG02-0075 | 75mm | 3" | 25KG | 1 | Hangtag |

## F-CLAMP

ADVANCEPOWER






| Model | Size (mm) | Weight | Maximum Clamping Force | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HCLF01-0150 | 50x150mm | 360g | 1500N | 1 | Hangtag |
| HCLF01-0200 | 50x200mm | 385g | 1500N | 1 | Hangtag |
| HCLF01-0250 | 50x250mm | 410g | 1500N | 1 | Hangtag |
| HCLF02-0300 | 80x300mm | 830g | 2500N | 1 | Hangtag |

| Model | Size (mm) | Weight | Maximum Clamping Force | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HCLF03-0300 | 120x300mm | 1530g | 4KN | 1 | Hangtag |
| HCLF03-0500 | 120x500mm | 1850g | 4KN | 1 | Hangtag |
| HCLF03-0800 | 120x800mm | 2350g | 4KN | 1 | Hangtag |

## 6-IN-1 MANUAL NAIL GUN

DRUAPOWER

STAPLES




6IN1



| Model | Size (mm) | Suitable Nail |
|---|---|---|
| HSTG01-S0005 | 160X185mm | ∩:10-14mm∩:6-14mm ∏:6-14mm T :14-15mm I :14-15mm |

## 3 IN 1 STAPLE GUN

DRUAPOWER





| Model | Size (in) | Size (mm) | Suitable Nail |
|---|---|---|---|
| HSTG01-S002 | 10.5" | 15.5X2.2X13.5mm | ∩:10-12mm ∏:4-14mm T:10-14mm |

## STAPLE GUN

DRUAPOWER

4-8mm
3/16-5/16INCH



| Model | Shrapnel Material | Suitable Nail |
|---|---|---|
| HSTG01-S0004 | 65Mn | ∏:4-8mm |

## LIGHT DUTY STAPLE GUN

ADVANCEPOWER



| Model | Shrapnel Material | Suitable Nail |
|---|---|---|
| HSTG01-S0003 | 65Mn | ∏:6-10mm |

## HAND RIVETER







| Model | Size (in) | Size (mm) | Steel Thickness(mm) | Nozzle Size(mm) | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|
| HHDR01-105A | 10" | 255mm | 2 | 2.4, 3.2,4.0,4.8 | 1 | Slider Card |

## ALUMINUM HAND RIVETER







| Model | Size (in) | Size (mm) | Steel Thickness(mm) | Nozzle Size(mm) | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|
| HHDR01-105B | 10" | 255mm | 2 | 2.4, 3.2,4.0,4.8 | 1 | Slider Card |

## HEAVY DUTY PROFESSIONAL HAND RIVETER







| Model | Size (in) | Size (mm) | Steel Thickness(mm) | Nozzle Size(mm) | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|
| HHDR02-100A | 10" | 255mm | 2.5 | 2.4, 3.2,4.0,4.8,6.4 | 1 | Color box |




## RIVETS







| Model | Size (mm) | Overall Length (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HHDR03-0624 | 2.4 | 6mm | Aluminum | 100 | Head card |
| HHDR03-0632 | 3.2 | 6mm | Aluminum | 50 | Head card |
| HHDR03-0832 | 3.2 | 8mm | Aluminum | 50 | Head card |
| HHDR03-1032 | 3.2 | 10mm | Aluminum | 50 | Head card |
| HHDR03-0640 | 4.0 | 6mm | Aluminum | 50 | Head card |
| HHDR03-0840 | 4.0 | 8mm | Aluminum | 50 | Head card |
| HHDR03-1040 | 4.0 | 10mm | Aluminum | 50 | Head card |
| HHDR03-0848 | 4.8 | 8mm | Aluminum | 50 | Head card |
| HHDR03-1048 | 4.8 | 10mm | Aluminum | 50 | Head card |
| HHDR03-1248 | 4.8 | 12mm | Aluminum | 50 | Head card |
| HHDR03-1064 | 6.4 | 10mm | Aluminum | 25 | Head card |







## FIBERGLASS HANDLE CLAW HAMMER

ADVANCEPOWER




| Model | Weight | Head Size (mm) | Head Material | Overall Length (mm) | Handle Material |
|---|---|---|---|---|---|
| HHAF02-0008 | 8oz | 105X26mm | HCS | 280mm | Fiberglass |
| HHAF02-0016 | 16oz | 135X33mm | HCS | 320mm | Fiberglass |

## CLAW HAMMER

DRUAPOWER 3IN1 MULTI-FUNCTION




| Model | Weight | Hardness (HRC) | Head Material | Hammerhead Material |
|---|---|---|---|---|
| HHAF07-0016 | 16oz | 54-60 | HCS | Magnetic |
| HHAF07-0020 | 20oz | 54-60 | HCS | Magnetic |
| HHAF07-0022 | 22oz | 54-60 | HCS | Magnetic |

## FIBERGLASS HANDLE MACHINIST HAMMER

ADVANCEPOWER




| Model | Weight | Head Size (mm) | Head Material | Overall Length (mm) | Handle Material |
|---|---|---|---|---|---|
| HHAF01-0200 | 200g | 95X19mm | HCS | 280mm | Fiberglass |
| HHAF01-0300 | 300g | 105X23mm | HCS | 305mm | Fiberglass |
| HHAF01-0500 | 500g | 118X27mm | HCS | 330mm | Fiberglass |
| HHAF01-0800 | 800g | 125X33mm | HCS | 360mm | Fiberglass |
| HHAF01-1000 | 1000g | 130X36mm | HCS | 360mm | Fiberglass |

## MACHINIST'S HAMMER WITH WOODEN HANDLE

CONTROLPOWER




| Model | Weight | Overall Length (mm) | Hardness | Handle Material |
|---|---|---|---|---|
| HHAW01-0200 | 200g | 280mm | 45#CS | Wood |
| HHAW01-0300 | 300g | 305mm | 45#CS | Wood |
| HHAW01-0500 | 500g | 330mm | 45#CS | Wood |
| HHAW01-0800 | 800g | 360mm | 45#CS | Wood |
| HHAW01-1000 | 1000g | 360mm | 45#CS | Wood |

## FIBERGLASS HANDLE MASON CLUB HAMMER

ADVANCEPOWER




| Model | Weight | Head Size (mm) | Overall Length (mm) | Head Material | Pack Quantity |
|---|---|---|---|---|---|
| HHAF09-1500 | 1500g | 105x45mm | 330mm | HCS | 1 |
| HHAF09-2000 | 2000g | 120x50mm | 380mm | HCS | 1 |

## FIBERGLASS HANDLE BLACK RUBBER MALLET




| Model | Weight | Overall Length (mm) | Head Material | Diameter | Pack Quantity |
|---|---|---|---|---|---|
| HHAF10-0016 | 16oz/450g | 340mm | Rubber | 16mm | 1 |
| HHAF10-0024 | 24oz/680g | 340mm | Rubber | 24mm | 1 |

## FIBERGLASS HANDLE RUBBER MALLET




| Model | Weight | Overall Length (mm) | Head Material | Handle Material | Pack Quantity |
|---|---|---|---|---|---|
| HHAF11-0016 | 16oz/450g | 375mm | Rubber | Fiberglass | 1 |
| HHAF11-0024 | 24oz/680g | 375mm | Rubber | Fiberglass | 1 |

## FRENCH ELECTRICIAN'S HAMMER




| Model | Size | Hardness | Handle Material | Surface Treatment | Pack Quantity |
|---|---|---|---|---|---|
| HHAM05-0018 | 18mm | 42-50HRC | PP+TPR | Surface Spray | 1 |

## REPLACEABLE-HEAD HOME INSTALLATION HAMMER SET




| Model | Weight | Hardness | Handle Material | Head Material | Pack Quantity |
|---|---|---|---|---|---|
| HHAM05-0003 | 8oz | 42-50HRC | PP+TPR | 45#CS/PU | 1 |

## MULTI AXE




| Model | Weight | Hardness (HRC) | Material | Handle Material | Adapter Nut |
|---|---|---|---|---|---|
| HAXM01-0600 | 600g | 54-60 | HCS | 45#CS+Fiberglass | 13mm |

## FIBERGLASS HANDLE AXE




| Model | Weight | Material | Handle Material | Surface Treatment | Pack Quantity |
|---|---|---|---|---|---|
| HAXN01-0650 | 650g | 45#CS | Nile Hollow Handle | Electrophoretic Painting | 1 |



## FIBERGLASS HANDLE AXE




| Model | Weight | Hardness (HRC) | Material | Handle Material | Pack Quantity |
|---|---|---|---|---|---|
| HAXF03-0600 | 600g | 54-58 | HCS | Fiberglass | 1 |
| HAXF03-0800 | 800g | 54-58 | HCS | Fiberglass | 1 |
| HAXF03-1000 | 1000g | 54-58 | HCS | Fiberglass | 1 |

## WOODEN HANDLE AXE




| Model | Weight | Hardness (HRC) | Material | Handle Material | Pack Quantity |
|---|---|---|---|---|---|
| HAXW01-0600 | 600g | 54-58 | 45#CS | Wood | 1 |
| HAXW01-0800 | 800g | 54-58 | 45#CS | Wood | 1 |
| HAXW01-1000 | 1000g | 54-58 | 45#CS | Wood | 1 |

## FIBERGLASS HANDLE SPLITTING AXE




| Model | Weight | Hardness (HRC) | Material | Handle Material | Pack Quantity |
|---|---|---|---|---|---|
| HAXF04-1000 | 1000g | 54-58 | 45#CS | Fiberglass | 1 |
| HAXF04-2000 | 2000g | 54-58 | 45#CS | Fiberglass | 1 |

## STONE CHISEL



| Model | Head shape | Hardness (HRC) | Material | Handle Material | Pack Quantity |
|---|---|---|---|---|---|
| HMRC01-0300 | Tip | 45# | HCS | PP+TPR | 1 |
| HMRC02-0300 | flat | 45# | HCS | PP+TPR | 1 |

## CROWBAR



| Model | Size | Hardness (HRC) | Material | Packing | Pack Quantity |
|---|---|---|---|---|---|
| HCWB01-0450 | 450mm | 44HRC | 65Mn | plastic seal | 1 |
| HCWB01-0600 | 600mm | 44HRC | 65Mn | plastic seal | 1 |
| HCWB01-0900 | 900mm | 44HRC | 65Mn | plastic seal | 1 |

## INDEXABLE PRY BAR




| Model | Size | Material | Surface Treatment | Pack Quantity |
|---|---|---|---|---|
| HIPB01-0300 | 300mm(12") | 40-42HRC | Black Phosphated | 1 |




## TAPE MEASURE

CONTROLPOWER ★★★

PRECISE







| Model | Size (M) | Tape Case Material | Scale | Blade Thickness (mm) | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|
| HTPM05-0316 | 3m x 16mm | ABS+TPR | Metric | 0.11mm | 1 | Plastic tag |
| HTPM05-0519 | 5m x 19mm | ABS+TPR | Metric | 0.11mm | 1 | Plastic tag |
| HTPM05-0525 | 5m x 25mm | ABS+TPR | Metric | 0.11mm | 1 | Plastic tag |
| HTPM05-0825 | 8M x 25mm | ABS+TPR | Metric | 0.11mm | 1 | Plastic tag |

## TAPE MEASURE

ADVANCEPOWER ★★★★

PRECISE








| Model | Size (M) | Tape Case Material | Tape Material | Tape Width (mm) | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|
| HTPM06-0316 | 3m x 16mm | ABS+TPR | 50#Steel | 16 | 1 | Plastic tag |
| HTPM06-0519 | 5m x 19mm | ABS+TPR | 50#Steel | 19 | 1 | Plastic tag |
| HTPM06-0525 | 5m x 25mm | ABS+TPR | 50#Steel | 25 | 1 | Plastic tag |
| HTPM06-0825 | 8M x 25mm | ABS+TPR | 50#Steel | 25 | 1 | Plastic tag |

## CARPENTER & FRAMING SQUARE



| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HSQR01-0203 | 200x300mm | Stainless steel | 1 | Plastic tag |
| HSQR01-0406 | 400x600mm | Stainless steel | 1 | Plastic tag |

## STAINLESS STEEL RULER

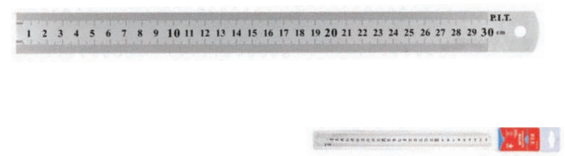


| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HSTR01-0150 | 150mm | 402 Stainless steel | 1 | Blister on card |
| HSTR01-0300 | 300mm | 402 Stainless steel | 1 | Blister on card |
| HSTR01-0500 | 500mm | 402 Stainless steel | 1 | Blister on card |
| HSTR01-0600 | 600mm | 402 Stainless steel | 1 | Blister on card |
| HSTR01-1000 | 1000mm | 402 Stainless steel | 1 | Blister on card |

## ANGLE PROTRACTOR SQUARE




| Model | Size (mm) | Size (in) | Material | Packaging |
|---|---|---|---|---|
| HSQR05-0300 | 300mm | 12" | Stainless steel | Slider card |

## CARPENTER'S SQUARE WITH BUBBLE LEVEL

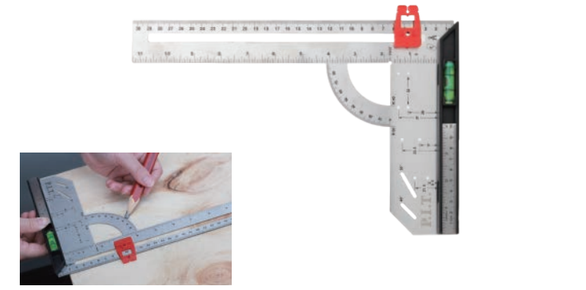


| Model | Size (mm) | Size (in) | Material | Packaging |
|---|---|---|---|---|
| HSQR03-0300 | 300mm | 12" | Stainless steel | Half blister |

## 3D MITRE ANGLE

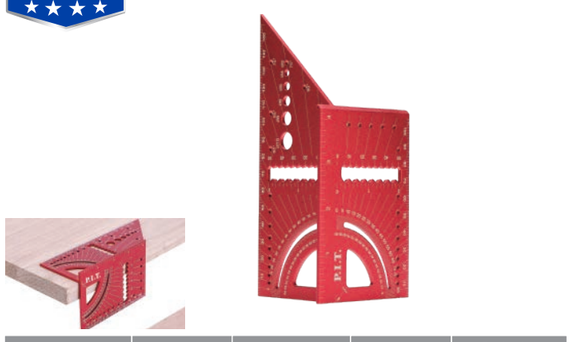

| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HSQR02-1611 | 169x60-110x73 | Stainless steel | 1 | Color box |

## ALUMINUM ALLOY RAFTER SQUARE

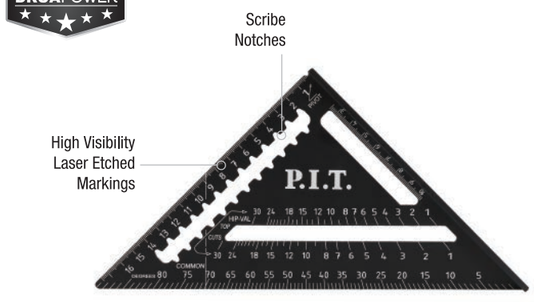


| Model | Size (mm) | Size (in) | Material | Packaging |
|---|---|---|---|---|
| HSQR04-0180A | 180mm | 7" | Stainless steel | Half blister |
| HSQR04-0300 | 300mm | 12" | Stainless steel | Half blister |

## MULTI-ANGLE MEASURING RULER

SCRIBING NEEDLE





| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HSQR06-0300 | 200x300mm | Stainless steel | 1 | Color box |

## MARKING GAUGE SET



| Model | Includes |
|---|---|
| HSET15-0010 | 5m × 19mm Tape Measure 1pc 180mm Triangle Square1pc Belt Clip Carpenter Pencils |

## CARPENTER'S TRIANGLE SQUARE WITH BUBBLE LEVEL

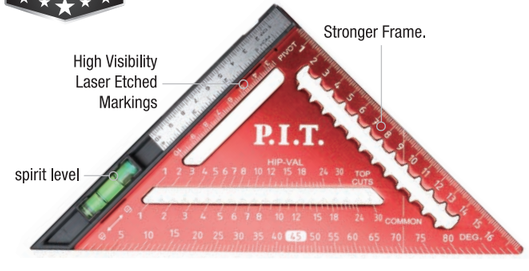


| Model | Size (mm) | Size (in) | Material | Packaging |
|---|---|---|---|---|
| HSQR04-0180B | 180mm | 7" | Stainless steel | Half blister |

## CARPENTER'S TRIANGLE SQUARE WITH PADDLES




| Model | Size (mm) | Size (in) | Material | Packaging |
|---|---|---|---|---|
| HSQR04-0180C | 180mm | 7" | Stainless steel | Half blister |

## MINI SPIRIT LEVEL





| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HSPL03-0065 | 2.5"/65mm | Magnetic | 1 | Color box |

## MINI SPIRIT LEVEL




| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HSPL03-0067 | 67x20.3x39mm | Magnetic | 1 | Color box |

## ELECTRICIAN'S SPIRIT LEVEL

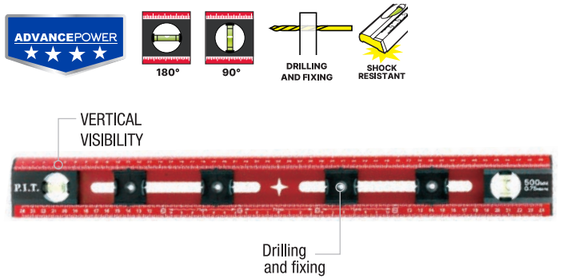


| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HSPL03-0500 | 500mm | Stainless steel | 1 | Label |

## RACK-MOUNTED TAPE MEASURE







| Model | Size (M) | Size (in) | Material | Packaging |
|---|---|---|---|---|
| HTMF03-0030 | 30M | 118" | Fiberglass | Color Box |
| HTMF03-0050 | 50M | 197" | Fiberglass | Color Box |




## MAGNETIC SPIRIT LEVEL






| Model | Size (mm) | Size (in) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HSPL02-0400 | 400mm | 16" | Magnetic | 1 | Label |
| HSPL02-0600 | 600mm | 24" | Magnetic | 1 | Label |
| HSPL02-0800 | 800mm | 32" | Magnetic | 1 | Label |
| HSPL02-1000 | 1000mm | 40" | Magnetic | 1 | Label |

| Model | Size (mm) | Size (in) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HSPL02-1200 | 1200mm | 48" | Magnetic | 1 | Label |
| HSPL02-1500 | 1500mm | 60" | Magnetic | 1 | Label |
| HSPL02-2000 | 2000mm | 80" | Magnetic | 1 | Label |
| | | | | | |

## MECHANICAL DISTANCE MEASURING WHEELS






| Model | Wheel diameter | Wheel Diameter (in) | Packaging |
|---|---|---|---|
| HDMW01-0318 | 318mm | (12.5") | Color Box |

## ELECTRONIC SCALE




| Model | Range | Size | Input Power | Battery |
|---|---|---|---|---|
| HEPS01-0100 | 0.05-100Kg | 30x40cm | 110-120V-50/60Hz | DC 4V 4Ah |

## MARKER





| Model | Size | Color | Pack Quantity | Packaging |
|---|---|---|---|---|
| HMKP02-1451 | 145mm | Black | 1 | Display Case |
| HMKP02-1452 | 145mm | Blue | 1 | Display Case |
| HMKP02-1453 | 145mm | Red | 1 | Display Case |

## PENCIL REFILL SET





| Model | Size | Diameter | Includes |
|---|---|---|---|
| HSET10-0009 | 120mm | ø2.8mm | Black Blue Red x3 |

## CARPENTER PENCIL SET







| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HSET11-0001 | 180mm | ABS | 1 | Display Case |

## MAGNETIC CARPENTER PENCIL SET





| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HSET11-0002 | 160mm | ABS | 1 | Display Case |




## UTILITY KNIFE

CONTROLPOWER




| Model | Material | Blade Width (mm) | Blade Length (mm) | Pack Quantity |
|---|---|---|---|---|
| HUTK01-0009 | SK5 | 9mm | 90mm | 1 |
| HUTK01-0018 | SK5 | 18mm | 100mm | 1 |

## UTILITY KNIFE

ADVANCEPOWER SK5 Blade




| Model | Material | Blade Width (mm) | Blade Length (mm) | Pack Quantity |
|---|---|---|---|---|
| HUTK02-0009 | SK5 | 9mm | 90mm | 1 |
| HUTK02-0018 | SK5 | 18mm | 100mm | 1 |
| HUTK02-0025 | SK5 | 25mm | 125mm | 1 |

## SNAP-OFF UTILITY KNIFE

DRUAPOWER 3 BLADES SK5 Blade








| Model | Size (mm) | Blade Length (mm) | Blade Width (mm) | Pre-Cut |
|---|---|---|---|---|
| HUTK03-0018 | 18mm | 100mm | 18mm | 7 |

## SNAP-OFF UTILITY KNIFE

ADVANCEPOWER 30° SK5 Blade









| Model | Size (mm) | Blade Length (mm) | Blade Width (mm) | Pre-Cut |
|---|---|---|---|---|
| HUTK04-0009 | 9mm | 90mm | 9mm | 12 |

## UTILITY KNIFE

ADVANCEPOWER SK5 Blade 3 BLADES

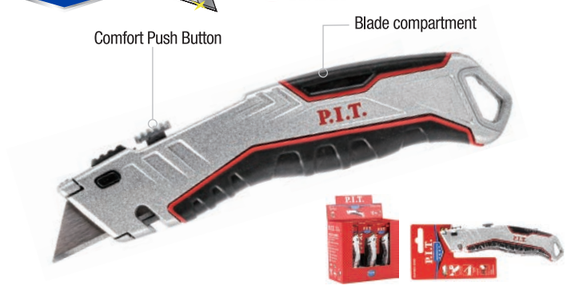


| Model | Type | Blade Length (mm) | Blade Width (mm) | Pack Quantity |
|---|---|---|---|---|
| HUTK04-0180 | T Blade | 61mm | 18mm | 1 |

## UTILITY KNIFE

DRUAPOWER SK5 Blade 3 BLADES




| Model | Type | Blade Length (mm) | Blade Width (mm) | Pack Quantity |
|---|---|---|---|---|
| HUTK05-0115 | T Blade | 61mm | 18mm | 1 |

## ZINC ALLOY UTILITY KNIFE









| Model | Type | Blade Length (mm) | Blade Width (mm) | Pack Quantity |
|---|---|---|---|---|
| HCTK03-0009 | T Blade | 61mm | 18mm | 1 |

## MULTIFUNCTIONAL STAINLESS STEEL UTILITY KNIFE










| Model | Size (mm) | Blade Length (mm) | Blade Width (mm) | Pre-Cut |
|---|---|---|---|---|
| HCTK06-0018B | 18mm | 100mm | 18mm | 7 |

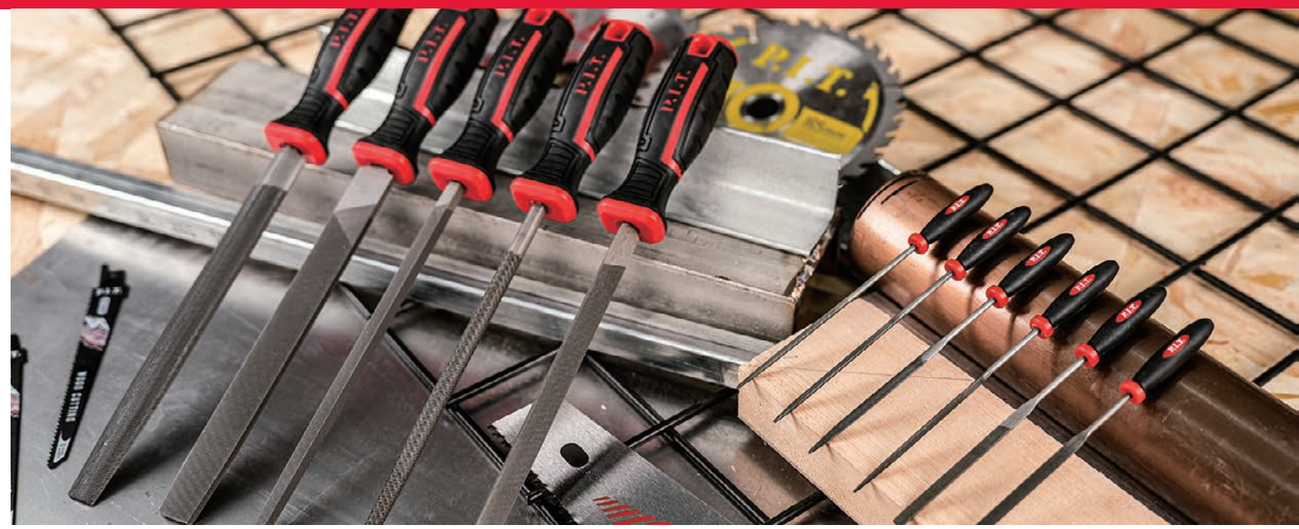

## CUTTER BLADE









| Model | Type | Blade Length (mm) | Blade Width (mm) | Pack Quantity |
|---|---|---|---|---|
| HUTK06-T0005 | T Blade | 61mm | 18mm | 1 |

## CUTTER BLADE






| Model | Material | Blade Width (mm) | Blade Length (mm) | Pack Quantity |
|---|---|---|---|---|
| HUTK06-0009 | SK5 | 9mm | 90mm | 1 |
| HUTK06-0018 | SK5 | 18mm | 100mm | 1 |
| HUTK06-0025 | SK5 | 25mm | 125mm | 1 |

## CUTTER BLADE










| Model | Size (mm) | Blade Length (mm) | Blade Width (mm) | Pre-Cut |
|---|---|---|---|---|
| HCTK05-T019 | 19mm | 61mm | 9mm | / |

## CUTTER BLADE

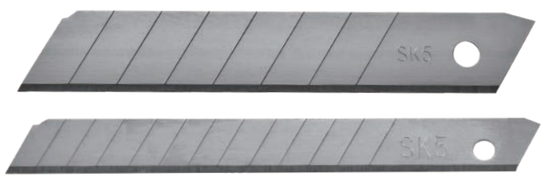


| Model | Size (mm) | Blade Length (mm) | Blade Width (mm) | Pre-Cut |
|---|---|---|---|---|
| HCTK05-B009 | 9mm | 90mm | 9mm | 12 |
| HCTK05-B018 | 18mm | 100mm | 18mm | 7 |

## STAINLESS STEEL SCISSORS










| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HHDS01-0245 | 245mm | 3Cr13 | 1 | Card Binding |

## SEMICIRCLE SECOND CUT FILE

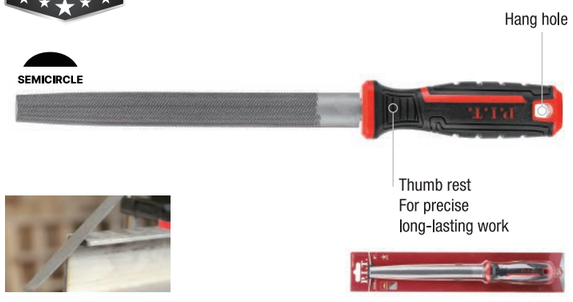




| Model | Size (mm) | Size (in) | Tooth Hardness | Material | Pack Quantity |
|---|---|---|---|---|---|
| HHRF01-0200 | 200 | 8" | <60HRC | T12 | 1 |

## RECTANGLE SECOND CUT FILE






| Model | Size (mm) | Size (in) | Tooth Hardness | Material | Pack Quantity |
|---|---|---|---|---|---|
| HFLF01-0200 | 200 | 8" | <60HRC | T12 | 1 |

## TRIANGLE SECOND CUT FILE






| Model | Size (mm) | Size (in) | Tooth Hardness | Material | Pack Quantity |
|---|---|---|---|---|---|
| HTRF01-0200 | 200 | 8" | <60HRC | T12 | 1 |




## HEAVY DUTY QUICK-CHANGE HACKSAW

DRUAPOWER







| Model | Size (mm) | Blade Length | Material | Quantity | Packaging |
|---|---|---|---|---|---|
| HHAS01-0300 | 300mm | 12" | Aluminum Alloy+ 20#Carbon Steel | 1 | Color sleeve |

## HAND SAW FRAME

ADVANCEPOWER




| Model | Size (mm) | Blade Length | Material | Quantity | Packaging |
|---|---|---|---|---|---|
| HHAS01-0250 | 250mm | 10" | Q195 steel | 1 | Color sleeve |

## SQUARE SECOND CUT FILE


DRUAPOWER




| Model | Size (mm) | Size (in) | Tooth Hardness | Material | Pack Quantity |
|---|---|---|---|---|---|
| HSQF01-0200 | 160 | 6" | <60HRC | T12 | 1 |

## 5 PIECE FILE SET

DRUAPOWER

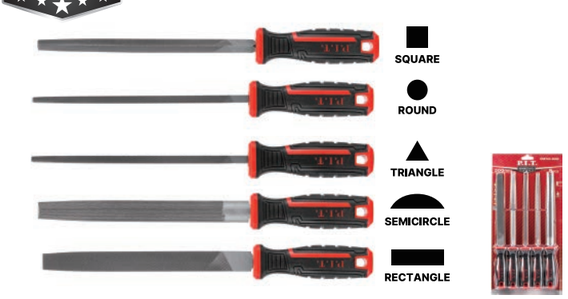


| Model | Size (mm) | Size (in) | Tooth Hardness | Material | Pack Quantity |
|---|---|---|---|---|---|
| HSET03-0005 | 200 | 8" | <60HRC | T12 | 1 |

## PVC PIPE CUTTER

ADVANCEPOWER




| Model | Cut Size (mm) | Blade Material | Surface treatment | Packaging |
|---|---|---|---|---|
| HPIC01-0042 | 3-42mm | 65Mn | Teflon treatment | Blister on card |

## PVC PIPE CUTTER

ADVANCEPOWER




| Model | Cut Size (mm) | Blade Material | Surface treatment | Packaging |
|---|---|---|---|---|
| HPIC01-0065 | 3-65mm | 65Mn | Teflon treatment | Blister on card |

## 6 PIECE MINI FILE SET

DRUAPOWER



| Model | Size (mm) | Size (in) | Tooth Hardness | Material | Pack Quantity |
|---|---|---|---|---|---|
| HSET03-0006 | 160 | 6" | <60HRC | T12 | 1 |

## 10 PIECE BI-METAL HACKSAW BLADES

DRUAPOWER 10PCS



| Model | Size (mm) | Blade Length | Blade Material | Quantity | Packaging |
|---|---|---|---|---|---|
| HHSB01-0300 | 300mm | 12" | M2+D6A | 10 | Plastic box |

## ADJUSTABLE TUBE CUTTER


ADVANCEPOWER




| Model | Cut Size (mm) | Blade Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HPIC02-0032 | 3-32mm | GCR15 | 1 | Blister on card |

## 2 PIECE TUBE CUTTER BLADES

ADVANCEPOWER

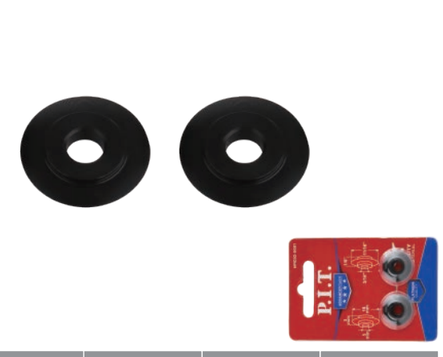

| Model | Size (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|
| HPIC02-0001 | 18x3x5 | GCR15 | 2 | Blister on card |

## CARBIDE WHEEL GLASS CUTTER

ADVANCEPOWER



| Model | Size (mm) | Cutting range (mm) | Cutting length (M) | Material | Pack Quantity |
|---|---|---|---|---|---|
| HGLC01-0170 | 170 | 1-8 | 6-7000 | Alloy | 1 |

## DIAMOND GLASS CUTTER

ADVANCEPOWER



| Model | Size (mm) | Cutting range (mm) | Cutting length (M) | Material | Pack Quantity |
|---|---|---|---|---|---|
| HGLC01-0180 | 180 | 1-5 | 5000 | Industrial Diamond | 1 |

## PRUNING SAW

CONTROLPOWER



| Model | Size (mm) | Size (in) | Tooth Spacing | Blade Material | Pack Quantity |
|---|---|---|---|---|---|
| HPSW01-0300 | 300 | 12" | 7 TPI | 65Mn | 1 |

## FOLDING SAW

CONTROLPOWER



| Model | Size (mm) | Size (in) | Tooth Spacing | Blade Material | Pack Quantity |
|---|---|---|---|---|---|
| HFSW01-0180 | 180 | 7" | 7 TPI | 65Mn | 1 |

## MANUAL TILE CUTTER

DRUAPOWER



| Model | Size (mm) | Parallel ruler (mm) | Base width (mm) | Tile Cutting Wheel Material | Hand Material | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|---|
| HTIC05-1200A | 1200mm | 800mm | 180mm | Tungsten carbide | PP+TPR | 1 | Fabric bag |

## HAND SAW


CONTROLPOWER



| Model | Size (in) | Size (mm) | Tooth Spacing | Blade Material | Hand Material | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|---|
| HHSW03-0350 | 14" | 350mm | 7 TPI | 65 Mn | ABS+TPR | 1 | Color sleeve |
| HHSW03-0400 | 16" | 400mm | 7 TPI | 65 Mn | ABS+TPR | 1 | Color sleeve |
| HHSW03-0450 | 18" | 450mm | 7 TPI | 65 Mn | ABS+TPR | 1 | Color sleeve |
| HHSW03-0500 | 20" | 500mm | 7 TPI | 65 Mn | ABS+TPR | 1 | Color sleeve |

## TILE CUTTING WHEEL

DRUAPOWER

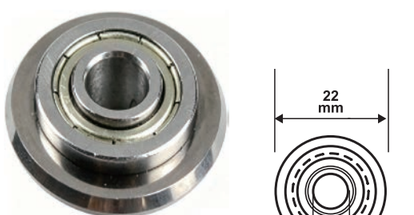




| Model | Size (mm) | Length (mm) | Width (mm) | Material |
|---|---|---|---|---|
| HTCB02-6022 | 22mm | 6mm | 6mm | Tungsten carbide |

## DRYWALL SAW

CONTROLPOWER



| Model | Size (mm) | Size (in) | Tooth Spacing | Blade Material | Pack Quantity |
|---|---|---|---|---|---|
| HDSW01-0150 | 150 | 6" | 7 TPI | 65Mn | 1 |

## WOOD CHISEL

CONTROLPOWER



| Model | Size(mm) | Material | Hand Material | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HCHW01-0008 | 8mm | CR-V | TPR | 1 | Double Blister |
| HCHW01-0012 | 12mm | CR-V | TPR | 1 | Double Blister |
| HCHW01-0016 | 16mm | CR-V | TPR | 1 | Double Blister |
| HCHW01-0020 | 20mm | CR-V | TPR | 1 | Double Blister |
| HCHW01-0024 | 24mm | CR-V | TPR | 1 | Double Blister |
| HCHW01-0032 | 32mm | CR-V | TPR | 1 | Double Blister |

## 4 PIECES PLASTIC HANDLE WOOD CHISEL SET

CONTROLPOWER



| Model | Size(mm) | Material | Hand Material | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HSET02-0004 | 6mm 12mm 18mm 24mm | CR-V | TPR | 1 | Blister on card |




## ADJUSTABLE WRENCH

DRUAPOWER









| Model | Size (in) | Size (mm) | Max Opening (mm) | Opening Depth (mm) | Head Thickness (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|---|---|
| HADW02-0150 | 6" | 150mm | 19 | 17.5 | 13 | 45#CS | 1 | Hangtag |
| HADW02-0200 | 8" | 200mm | 24 | 22 | 15 | 45#CS | 1 | Hangtag |
| HADW02-0250 | 10" | 250mm | 28 | 26 | 17 | 45#CS | 1 | Hangtag |
| HADW02-0300 | 12" | 300mm | 34 | 31 | 20 | 45#CS | 1 | Hangtag |

## EXTRA SLIM JAW ADJUSTABLE WRENCH

ADVANCEPOWER









| Model | Size (in) | Size (mm) | Max Opening (mm) | Material | Pack Quantity | Packaging |
|---|---|---|---|---|---|---|
| HADW03-0150 | 6" | 150mm | 30 | 45# steel | 1 | Hangtag |
| HADW03-0200 | 8" | 200mm | 35 | 45# steel | 1 | Hangtag |

## RATCHETING COMBINATION SPANNER








| Model | Size (mm) | Material | Surface treatment |
|---|---|---|---|
| HRCW01-0006 | 6mm | CRV | Mirror chrome plating |
| HRCW01-0007 | 7mm | CRV | Mirror chrome plating |
| HRCW01-0008 | 8mm | CRV | Mirror chrome plating |
| HRCW01-0009 | 9mm | CRV | Mirror chrome plating |
| HRCW01-0010 | 10mm | CRV | Mirror chrome plating |
| HRCW01-0011 | 11mm | CRV | Mirror chrome plating |
| HRCW01-0012 | 12mm | CRV | Mirror chrome plating |
| HRCW01-0013 | 13mm | CRV | Mirror chrome plating |
| HRCW01-0014 | 14mm | CRV | Mirror chrome plating |
| HRCW01-0015 | 15mm | CRV | Mirror chrome plating |
| HRCW01-0016 | 16mm | CRV | Mirror chrome plating |

| Model | Size (mm) | Material | Surface treatment |
|---|---|---|---|
| HRCW01-0017 | 17mm | CRV | Mirror chrome plating |
| HRCW01-0018 | 18mm | CRV | Mirror chrome plating |
| HRCW01-0019 | 19mm | CRV | Mirror chrome plating |
| HRCW01-0020 | 20mm | CRV | Mirror chrome plating |
| HRCW01-0021 | 21mm | CRV | Mirror chrome plating |
| HRCW01-0022 | 22mm | CRV | Mirror chrome plating |
| HRCW01-0024 | 24mm | CRV | Mirror chrome plating |
| HRCW01-0027 | 27mm | CRV | Mirror chrome plating |
| HRCW01-0030 | 30mm | CRV | Mirror chrome plating |
| HRCW01-0032 | 32mm | CRV | Mirror chrome plating |

## 14 PCS RATCHETING COMBINATION SPANNER



| Model | Size (mm) | Material |
|---|---|---|
| HSET04-014A | 8,9,10,11,12,13,14,15,16,17,18,19,22,24mm | CRV |


## COMBINATION WRENCH





| Model | Size (mm) | Material | Surface treatment |
|---|---|---|---|
| HCBW01-0006 | 6mm | 45#steel | Matte chrome |
| HCBW01-0007 | 7mm | 45#steel | Matte chrome |
| HCBW01-0008 | 8mm | 45#steel | Matte chrome |
| HCBW01-0009 | 9mm | 45#steel | Matte chrome |
| HCBW01-0010 | 10mm | 45#steel | Matte chrome |
| HCBW01-0011 | 11mm | 45#steel | Matte chrome |
| HCBW01-0012 | 12mm | 45#steel | Matte chrome |
| HCBW01-0013 | 13mm | 45#steel | Matte chrome |
| HCBW01-0014 | 14mm | 45#steel | Matte chrome |
| HCBW01-0015 | 15mm | 45#steel | Matte chrome |
| HCBW01-0016 | 16mm | 45#steel | Matte chrome |
| HCBW01-0017 | 17mm | 45#steel | Matte chrome |
| HCBW01-0018 | 18mm | 45#steel | Matte chrome |

| Model | Size (mm) | Material | Surface treatment |
|---|---|---|---|
| HCBW01-0019 | 19mm | 45#steel | Matte chrome |
| HCBW01-0020 | 20mm | 45#steel | Matte chrome |
| HCBW01-0021 | 21mm | 45#steel | Matte chrome |
| HCBW01-0022 | 22mm | 45#steel | Matte chrome |
| HCBW01-0023 | 23mm | 45#steel | Matte chrome |
| HCBW01-0024 | 24mm | 45#steel | Matte chrome |
| HCBW01-0025 | 25mm | 45#steel | Matte chrome |
| HCBW01-0026 | 26mm | 45#steel | Matte chrome |
| HCBW01-0027 | 27mm | 45#steel | Matte chrome |
| HCBW01-0028 | 28mm | 45#steel | Matte chrome |
| HCBW01-0030 | 30mm | 45#steel | Matte chrome |
| HCBW01-0032 | 32mm | 45#steel | Matte chrome |

## 14 PCS COMBINATION WRENCH SET

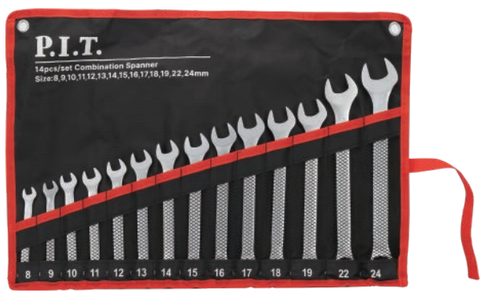


| Model | Size (mm) | Material |
|---|---|---|
| HSET04-014B | 8,9,10,11,12,13,14,15,16,17,18,19,22,24mm | 45#steel |

## 9 PCS L-TYPE MILLING WRENCH SET



| Model | HSET06-0009 | Material | CRV |
|---|---|---|---|
| Size (mm) | 7mm 8mm 10mm 11mm 12mm 13mm 14mm 17mm 19mm | | |
| Length(mm) | 106mm 114mm 129mm 136mm 144mm 152mm 160mm 187mm 204mm | | |
| Diameter(mm) | 11mm 12.5mm 13.5mm 16.5mm 18mm 19.5mm 21mm 25.5mm 28.5mm | | |
| Width(mm) | 26mm 29.8mm 35.8mm 39.3mm 42mm 44.8mm 47mm 56.5mm 60.8mm | | |

## 3/8 IN. DEEP IMPACT SOCKET






| Model | Specifications (mm) | Length(mm) | Material | Surface treatmen |
|---|---|---|---|---|
| HDLS02-0008 | 8mm | 64 | 42CR-MO | Black phosphating |
| HDLS02-0010 | 10mm | 64 | 42CR-MO | Black phosphating |
| HDLS02-0012 | 12mm | 64 | 42CR-MO | Black phosphating |
| HDLS02-0013 | 13mm | 64 | 42CR-MO | Black phosphating |
| HDLS02-0014 | 14mm | 64 | 42CR-MO | Black phosphating |
| HDLS02-0015 | 15mm | 64 | 42CR-MO | Black phosphating |
| HDLS02-0017 | 17mm | 64 | 42CR-MO | Black phosphating |
| HDLS02-0019 | 19mm | 64 | 42CR-MO | Black phosphating |
| HDLS02-0021 | 21mm | 64 | 42CR-MO | Black phosphating |
| HDLS02-0024 | 24mm | 64 | 42CR-MO | Black phosphating |

## 3/8 IN. IMPACT SOCKET




| Model | Specifications (mm) | Length(mm) | Material | Surface treatmen |
|---|---|---|---|---|
| HLMS02-0008 | 8mm | 28 | 42CR-MO | Black phosphating |
| HDMS02-0010 | 10mm | 28 | 42CR-MO | Black phosphating |
| HDMS02-0012 | 12mm | 28 | 42CR-MO | Black phosphating |
| HDMS02-0013 | 13mm | 28 | 42CR-MO | Black phosphating |
| HDMS02-0014 | 14mm | 28 | 42CR-MO | Black phosphating |
| HDMS02-0015 | 15mm | 28 | 42CR-MO | Black phosphating |
| HDMS02-0017 | 17mm | 30 | 42CR-MO | Black phosphating |
| HDMS02-0019 | 19mm | 30 | 42CR-MO | Black phosphating |
| HDMS02-0021 | 21mm | 30 | 42CR-MO | Black phosphating |
| HDMS02-0024 | 24mm | 32 | 42CR-MO | Black phosphating |

## 1/2 IN. DEEP IMPACT SOCKET






| Model | Specifications (mm) | Length(mm) | Material | Surface treatmen |
|---|---|---|---|---|
| HDLS01-0008 | 8mm | 38 | 42CR-MO | Black phosphating |
| HDLS01-0010 | 10mm | 38 | 42CR-MO | Black phosphating |
| HDLS01-0012 | 12mm | 38 | 42CR-MO | Black phosphating |
| HDLS01-0013 | 13mm | 38 | 42CR-MO | Black phosphating |
| HDLS01-0014 | 14mm | 38 | 42CR-MO | Black phosphating |
| HDLS01-0015 | 15mm | 38 | 42CR-MO | Black phosphating |
| HDLS01-0017 | 17mm | 38 | 42CR-MO | Black phosphating |
| HDLS01-0019 | 19mm | 38 | 42CR-MO | Black phosphating |
| HDLS01-0021 | 21mm | 38 | 42CR-MO | Black phosphating |
| HDLS01-0024 | 24mm | 40 | 42CR-MO | Black phosphating |

## 1/2 IN. IMPACT SOCKET




| Model | Specifications (mm) | Length(mm) | Material | Surface treatmen |
|---|---|---|---|---|
| HLMS01-0008 | 8mm | 78 | 42CR-MO | Black phosphating |
| HLMS01-0010 | 10mm | 78 | 42CR-MO | Black phosphating |
| HLMS01-0012 | 12mm | 78 | 42CR-MO | Black phosphating |
| HLMS01-0013 | 13mm | 78 | 42CR-MO | Black phosphating |
| HLMS01-0014 | 14mm | 78 | 42CR-MO | Black phosphating |
| HLMS01-0015 | 15mm | 78 | 42CR-MO | Black phosphating |
| HLMS01-0017 | 17mm | 78 | 42CR-MO | Black phosphating |
| HLMS01-0019 | 19mm | 78 | 42CR-MO | Black phosphating |
| HLMS01-0021 | 21mm | 78 | 42CR-MO | Black phosphating |
| HLMS01-0024 | 24mm | 78 | 42CR-MO | Black phosphating |

## 3-IN-1 RATCHET HANDLE




| Model | Size (mm) | Material | Teeth |
|---|---|---|---|
| HRCH01-0003 | 1/4"、3/8"、1/2" | 42Cr-Mo | 72 |

## 9 PCS 3/8 IN. DEEP IMPACT SOCKET SET




| Model | Size (mm) 8、10、12、13、14、15、17、19mm | | |
|---|---|---|---|
| HSTL02-0009 | +3/8"Hexagonal shank with beaded connector | | |
| Material | Printing method | Surface treatmen | |
| 42CR-MO | LaserLOGO | Black phosphating | |

## 10 PCS 1/2 IN. DEEP IMPACT SOCKET SET




| Model | Size (mm) | Material | Printing method | Surface treatmen |
|---|---|---|---|---|
| HSTL01-0010 | 10、12、13、14、15、17、19、21、22、24mm | 42CR-MO | LaserLOGO | Black phosphating |

## 10 PCS 1/2 IN. IMPACT SOCKET SET




| Model | Size (mm) | Material | Printing method | Surface treatmen |
|---|---|---|---|---|
| HSTS01-0010 | 10、12、13、14、15、17、19、21、22、24mm | 42CR-MO | LaserLOGO | Black phosphating |



## HYDRAULIC TROLLEY JACKS



| Model | Load | Minimum height (mm) | Maximum height (mm) |
|---|---|---|---|
| HHTJ01-0002 | 2 ton | 85mm | 330mm |
| HHTJ01-0003 | 3 ton | 135mm | 400mm |

## 2 PIECES - 2TON JACK STANDS SET



| Model | Load | Minimum height (mm) | Maximum height (mm) |
|---|---|---|---|
| HRAJ01-0002 | 2 ton | 268mm | 418mm |

## WELDED BOTTLE JACKS



| Model | Load | Minimum altitude | Lifting Height | Adjustable height |
|---|---|---|---|---|
| HBOJ01-0003 | 3 ton | 180mm | 105mm | 60mm |
| HBOJ01-0005 | 5 ton | 185mm | 115mm | 60mm |
| HBOJ01-0010 | 10 ton | 190mm | 110mm | 60mm |

## HYDRAULIC SHOP PRESS



| Model | Load | Route | Scope of work | Size |
|---|---|---|---|---|
| HBES01-0010 | 10T | 175mm | 0-340mm | Ø42 |
| HBES01-0012 | 12T | 150mm | 0-610mm | Ø25 |
| HBES01-0020 | 20T | 175mm | 0-910mm | Ø48 |

## 40" PLASTIC CAR CREEPER




| Model | Load-bearing | Size (in) | Material |
|---|---|---|---|
| HMEC01-0040 | 250lbs | 40" | Plastic |

## GREASE PUMP



| Model | Capacity | Oil pressure | Tube length | Barrel height | Diameter |
|---|---|---|---|---|---|
| HMAB01-0080 | 8L | 3000psi | 1.8m | 405mm | 150mm |

## TIRE INFLATING GUN



| Model | Range | Accuracy | Air Tube Length |
|---|---|---|---|
| PPG4-A | 0-12 bar/0-170psi | 0.5 psi | 360 mm |




## TOOL BAG

| Model | capacity | Size(CM) | Material |
|---|---|---|---|
| HTKB01-0001 | 35L | 30x25x50cm | 1680D Oxford Cloth |

## TOOL BOX

ADVANCEPOWER

IP65 WATER PROOF







Material
Transparent organizers with polycarbonate lids

Gasket
Solid gasket ensures dustproof and water resistant

Handle
Bi-material handle for comfortable grip

Thickened Body
Thickened body made from strong engineering-grade plastics

Latches
Durable plastic or steel latches

| Model | Size(in) | Size(CM) | Material | Type |
|---|---|---|---|---|
| HPLB01-0016 | 16" | 40.3x23.2x19.8cm | PP | For Hand Tools |
| HPLB01-0019 | 19" | 47.6x 25.2x23.5cm | PP | For Hand Tools |
| HPLB01-0022 | 22" | 55.2x27.6x27cm | PP | For Hand Tools |

## 7-DRAWER ROLLING TOOL CHEST

DRUAPOWER

LOCKING ANTI-THEFT






Locking &Key

Push-pull Handle

Stainless Steel Bars

7 Drawers With Large Capacity

Universal Wheel Lock

| Model | Description | Capacity | Work Surface Size |
|---|---|---|---|
| HRTC01-0007 | 1-2 drawer size: 570x410x54mm<br>3-6 drawer size: 570x410x112mm<br>7th drawer size: 570x410x170mm | 280kg | 390x470mm |

## TOOL BAG

DRUAPOWER




| Model | Size(in) | Size(CM) | Material | Type |
|---|---|---|---|---|
| HTLB01-017A | 17" | 50x30x28cm | 600D Oxford Cloth | For Hand Tools |

## TOOL BAG

DRUAPOWER




| Model | Size(in) | Size(CM) | Material | Type |
|---|---|---|---|---|
| HTLB01-017B | 17" | 50x30x28cm | 600D Oxford Cloth | For Hand Tools |



## ANTI-VIBRATION GLOVES

ADVANCEPOWER ★★★★



ANTI SHOCK

ANSI CUT 5

| Model | Description | Size | knitting |
|---|---|---|---|
| HWKG04-0009 | HPPE+Nitrile rubber | 9/L | 13 pins |
| HWKG04-0010 | HPPE+Nitrile rubber | 10/XL | 13 pins |
| HWKG04-0011 | HPPE+Nitrile rubber | 11/XXL | 13 pins |

## PU COATED CUT PROTECTION GLOVES

ADVANCEPOWER ★★★★



VENTILATION

ANSI CUT 5

| Model | Description | Size | knitting |
|---|---|---|---|
| HWKG05-0008 | HPPE+PU | 8/M | 13 pins |
| HWKG05-0009 | HPPE+PU | 9/L | 13 pins |
| HWKG05-0010 | HPPE+PU | 10/XL | 13 pins |

## SMOOTH NITRILE COATED GLOVES

ADVANCEPOWER ★★★★



EN388 3122X

WEAR RESISTANT

| Model | Description | Size | knitting |
|---|---|---|---|
| HWKG01-0008 | Polyester+Nitrile rubber | 8/M | 13 pins |
| HWKG01-0009 | Polyester+Nitrile rubber | 9/L | 13 pins |
| HWKG01-0010 | Polyester+Nitrile rubber | 10/XL | 13 pins |

## TEXTURED LATEX COATED COTTON GLOVES

ADVANCEPOWER ★★★★



VENTILATION

ANTI SLIDE

| Model | Description | Size | knitting |
|---|---|---|---|
| HWKG02-0010 | Cotton+Emulsion | 10/XL | 10 pins |

## FACE SHIELD

CONTROLPOWER ★★★



| Model | Description | Size (mm) | Material |
|---|---|---|---|
| HFSR01-0001 | Knob type | 390x200mm | PVC+Aluminum edge |

## SAFETY HELMET

CONTROLPOWER ★★★



| Model | Description | Size (mm) | Material |
|---|---|---|---|
| HSHR01-0001 | Lining: 8-point | 510--620mm | HDPE+PP |
| HSHW01-0002 | Lining: 4-point | 510--620mm | HDPE+PP |

## WHITE COTTON GLOVES WITH PVC COATING

CONTROLPOWER ★★★



VENTILATION

ANTI-SLIP POINTS

| Model | Description | Size | knitting |
|---|---|---|---|
| HWKG03-0010A | Cotton+PVC | 10/XL | 10 pins |

## BLACK COTTON GLOVES WITH PVC COATING

CONTROLPOWER ★★★



VENTILATION

ANTI-SLIP POINTS

| Model | Description | Size | knitting |
|---|---|---|---|
| HWKG03-0010B | Cotton+PVC | 10/XL | 10 pins |

## KNEEPADS

ADVANCEPOWER ★★★★



| Model | Description | Size (mm) | Material |
|---|---|---|---|
| HKNP01-0001 | Oxford Cloth + 30g Silicone Lining | 220x170mm | PVC |

## HAND PRESSURE SPRAYER

ADVANCEPOWER ★★★★



| Model | Description | Size (mm) | Material |
|---|---|---|---|
| HPRS01-0020 | Garden watering | 75oz / 2L | PE |




DRUAPOWER

## HEAVY DUTY CAULKING GUN

| Model | Impelling ratio | Cylinder Capacity | Pack Quantity | Packaging |
|---|---|---|---|---|
| HCAG04-0300 | 12-24 | 300ml | 1 | Hangtag |

## CAULKING GUN

ADVANCEPOWER




| Model | Size (in) | Size (mm) | Cylinder Capacity | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HCAG01-0225 | 9" | 225mm | 0.31L | 1 | Hangtag |

## HEAVY DUTY CAULKING GUN

DRUAPOWER




| Model | Size (in) | Size (mm) | Cylinder Capacity | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HCAG02-0225 | 9" | 225mm | 0.31L | 1 | Hangtag |

## SEALED CYLINDRICAL CAULKING GUN

ADVANCEPOWER




| Model | Size (in) | Size (mm) | Cylinder Capacity | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HCAG03-0225 | 9" | 225mm | 0.31L | 1 | Hangtag |

## SEALED CYLINDRICAL CAULKING GUN

ADVANCEPOWER




| Model | Size (in) | Size (mm) | Cylinder Capacity | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HCAG03-0400 | 15" | 400mm | 0.4L | 1 | Hangtag |

## CAULKING GUN

ADVANCEPOWER




| Model | Size (in) | Size (mm) | Pressure Force(N) | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HCAG05-0230 | 9" | 230mm | 135KG | 1 | Hangtag |

## CAULKING GUN

CONTROLPOWER



| Model | Size (in) | Size (mm) | Pressure Force(N) | Pack Quantity | Packaging |
|---|---|---|---|---|---|
| HCAG06-0230 | 9" | 230mm | 135KG | 1 | Hangtag |

## FOAM GUN

CONTROLPOWER




| Model | Size (mm) | Pack Quantity | Packaging |
|---|---|---|---|
| HFMG04-P01C | 29x15x4.5 | 1 | Color box |

## FOAM GUN

CONTROLPOWER




| Model | Size (mm) | Pack Quantity | Packaging |
|---|---|---|---|
| HFMG02-P01A | 23.5x13.8x4.5cm | 1 | Color box |

## FOAM GUN

CONTROLPOWER



| Model | Size (mm) | Pack Quantity | Packaging |
|---|---|---|---|
| HFMG01-A01A | 30.5x19x4.5 | 1 | Hangtag |

## FOAM GUN

CONTROLPOWER



| Model | Size (mm) | Pack Quantity | Packaging |
|---|---|---|---|
| HFMG01-A01B | 30.5x17x4.5 | 1 | Color box |

## 230MM ROLLER BRUSH

CONTROLPOWER



| Model | Size (in) | Diameter | Material | Bristle Height |
|---|---|---|---|---|
| HRLB02-0001 | 9" | 38mm | Acrylic Blends | 12mm |
| HRLB02-0002 | 9" | 38mm | Acrylic Blends | 18mm |
| HRLB02-0003 | 9" | 38mm | Acrylic Blends | 12mm |

## 100MM ROLLER COVER

CONTROLPOWER



| Model | Size (in) | Diameter | Material | Bristle Height |
|---|---|---|---|---|
| HRLS01-0001 | 4" | 15mm | Sponge | 12mm |
| HRLS01-0002 | 4" | 15mm | Acrylic Blends | 12mm |

## 3PCS WIRE BRUSH SET

ADVANCEPOWER




| Model | Size | Bristles | Hand Material |
|---|---|---|---|
| HSET14-0003 | 180mm | Nylon, brass, stainless steel brushes | PP+TPR |

## ALUMINUM ALLOY EXTENSION ROD

CONTROLPOWER



| Model | Minimum length | Maximum length | Material |
|---|---|---|---|
| HEXR01-0102 | 1.1m | 2m | Aluminum |

## 10 PCS MICRO FIBRE ROLLER COVER

CONTROLPOWER



| Model | Size (in) | Diameter | Material | Bristle Height |
|---|---|---|---|---|
| HRLS01-0003 | 4" | 15mm | Ultrafine chemical fiber | 12mm |

## 230MM ROLLER COVER

CONTROLPOWER



| Model | Size (in) | Diameter | Material | Bristle Height |
|---|---|---|---|---|
| HRLS02-0001 | 9" | 15mm | Acrylic Blends | 12mm |
| HRLS02-0002 | 9" | 15mm | Acrylic Blends | 18mm |
| HRLS02-0003 | 9" | 15mm | Acrylic Blends | 12mm |

## CYLINDER BRUSH BRACKET

CONTROLPOWER



| Model | Size (in) | Material | Rod diameter |
|---|---|---|---|
| HRLF01-0001 | 4"x17" | Galvanized Iron | 5.7mm |
| HRLF02-0001 | 9" | Galvanized Iron | Main rod 5.7mm<br>Auxiliary rod 2.8mm |

## 100MM ROLLER BRUSH

CONTROLPOWER



| Model | Size (in) | Diameter | Material | Bristle Height |
|---|---|---|---|---|
| HRLB01-0001 | 4" | 15mm | Acrylic Blends | 12mm |
| HRLB01-0002 | 4" | 15mm | Sponge | 13mm |

## PAINT TRAY

CONTROLPOWER



| Model | Size (mm) | Material |
|---|---|---|
| HRLP01-0001 | 4" | PP |
| HRLP01-0002 | 9" | PP |

## 10 PCS PAINT TRAY LINER

CONTROLPOWER



| Model | Size (mm) | Material |
|---|---|---|
| HRPL01-0010 | 9" | PP |
| HRPL02-0010 | 4" | PP |

## PAINT BRUSH

CONTROLPOWER ★★★




| Model | Size (in) | Bristle Material | Hand Material |
|---|---|---|---|
| HPAB01-0025 | 1" | 100%PET | PET |
| HPAB01-0040 | 1.5" | 100%PET | PET |
| HPAB01-0050 | 2" | 100%PET | PET |
| HPAB01-0065 | 2.5" | 100%PET | PET |
| HPAB01-0075 | 3" | 100%PET | PET |
| HPAB01-0100 | 4" | 100%PET | PET |

## PAINT BRUSH

CONTROLPOWER ★★★




| Model | Size (in) | Bristle Material | Hand Material |
|---|---|---|---|
| HPAB02-0025 | 1" | 100%PET | Wood |
| HPAB02-0040 | 1.5" | 100%PET | Wood |
| HPAB02-0050 | 2" | 100%PET | Wood |
| HPAB02-0065 | 2.5" | 100%PET | Wood |
| HPAB02-0075 | 3" | 100%PET | Wood |
| HPAB02-0100 | 4" | 100%PET | Wood |

## GLASS SUCKER

ADVANCEPOWER ★★★★




| Model | Horizontal Suction | Vertical Suction | Material | Diameter |
|---|---|---|---|---|
| HGLS01-0002 | 70kg | 80kg | Rubber | 118mm |

## GLASS SUCKER

ADVANCEPOWER ★★★★




| Model | Horizontal Suction | Vertical Suction | Material | Diameter |
|---|---|---|---|---|
| HGLS01-0003 | 100kg | 120kg | Rubber | 118mm |

## 3 PCS PAINT BRUSH SET

CONTROLPOWER ★★★




| Model | Size (in) | Bristle Material | Hand Material |
|---|---|---|---|
| HPBS01-0001 | 1"x1 2"x1 3"x1 | 100%PET | PET |

## 9 PCS PAINT BRUSH SET

CONTROLPOWER ★★★




| Model | Size (in) | Bristle Material | Hand Material |
|---|---|---|---|
| HPBS01-0002 | 1"x3 1.5"x2 2"x2 3"x1 4"x1 | 100%PET | PET |

## 9 PCS PAINT BRUSH SET

CONTROLPOWER ★★★




| Model | Size (in) | Bristle Material | Hand Material |
|---|---|---|---|
| HPBS02-0001 | 1"x3 1.5"x2 2"x2 3"x1 4"x1 | 100%PET | Wood |

## GLASS SUCKER


ADVANCEPOWER ★★★★




| Model | Horizontal Suction | Vertical Suction | Material | Diameter |
|---|---|---|---|---|
| HGLS01-0001 | 35kg | 40kg | Rubber | 118mm |

## CHAIN BLOCK

ADVANCEPOWER ★★★★

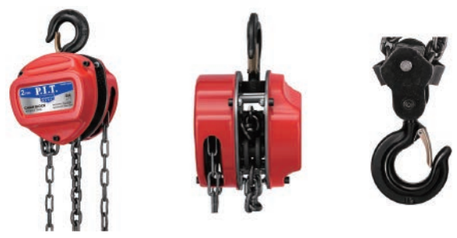


| Model | capacity | Lifting height | Minimum Hook Spacing | Number Of Lifting Chain Rows | Chain Diameter | Hand Chain Pull Force |
|---|---|---|---|---|---|---|
| HCNB01-0103 | 1ton | 3m | 270mm | 1 | 6mm | 304N |
| HCNB01-0203 | 2ton | 3m | 444mm | 1 | 6mm | 314N |
| HCNB01-0303 | 3ton | 3m | 486mm | 2 | 8mm | 343N |

## LADDER

ADVANCEPOWER ★★★★ 150KG



Metal Reinforced Locking Point



Metal Reinforced Corners




| Model | Total Length | Work length | Material |
|---|---|---|---|
| HALL01-0370 | 3700±50mm | 3460±50mm | Aluminum 6063 |
| HALL01-0470 | 4700±50mm | 4460±50mm | Aluminum 6063 |
| HALL01-0570 | 5700±50mm | 5560±50mm | Aluminum 6063 |